MILITARY SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY, (SERIES SC (CABLED), SOCKET CONTACT, JAM NUT, REAR MOUNTED, CLASS 2).

This amendment forms a part of MIL-C-39012/40F, dated 14 December 1987, and is approved for use by all Departments and Agencies of the Department of Defense.

Page 2

Delete and substitute figure 2.

Inches	mm
.005	0.13
.010	0.25
.032	0.81
.103	2.61
.492	12.49
.498	12.65

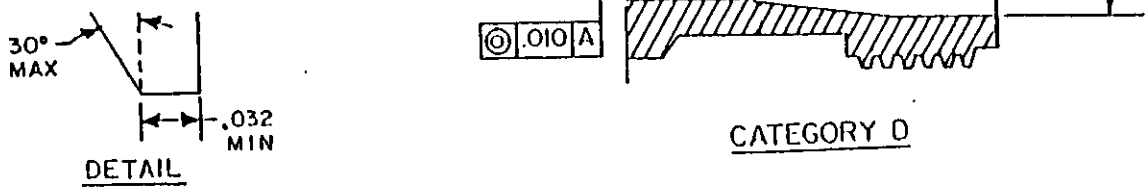

NOTES:
1. Metric equivalents are given for general information only.
2. Chamfer is optional (if chamfer is used put chamfer on a 30° maximum.)
3. Dimensions are in inches.
4. Dimension to meet connector performance requirements.

FIGURE 2. Mating dimensions for socket terminations.

Distribution statement A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - MI, EA
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, SH, OS
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3717-04)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.