
INCH-POUND

MIL-PRF-39012/40J
w/AMENDMENT 2
12 October 2021
SUPERSEDING
MIL-PRF-39012/40J
w/AMENDMENT 1
21 November 2016

PERFORMANCE SPECIFICATION SHEET
CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY
(SERIES SC (CABLED), SOCKET CONTACT, JAM NUT, REAR MOUNTED, CLASS 2)

This specification is approved for use by all Departments
and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall
consist of this specification sheet and MIL-PRF-39012.

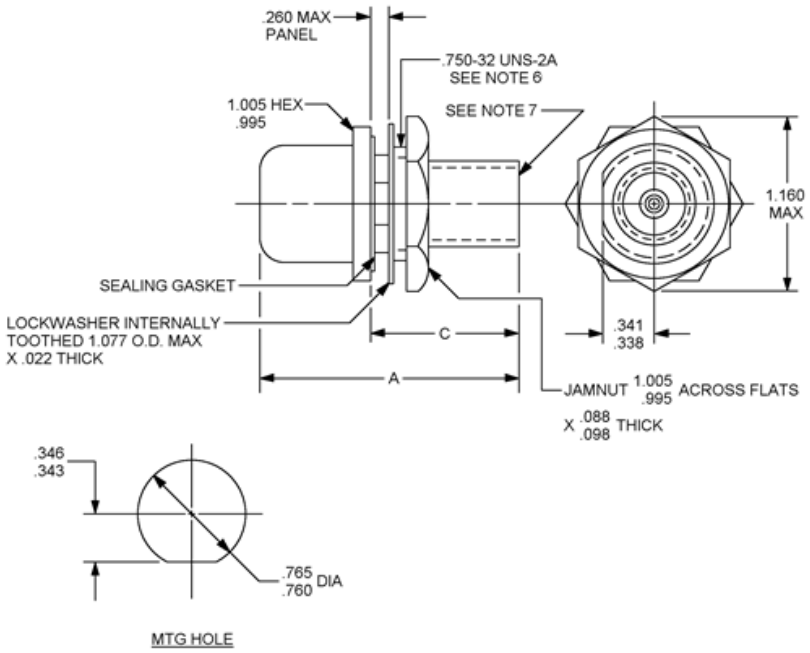

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.022	0.56	.338	8.59	.750	19.05	1.005	25.53
.088	2.24	.341	8.66	.760	19.30	1.077	27.36
.098	2.49	.343	8.71	.765	19.43	1.160	29.46
.260	6.60	.346	8.79	.995	25.27		


FIGURE 1. General configuration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. For dimensions A and C, see tables I and III.
3. Wrench flats to accommodate standard wrench in accordance with FED-STD-H28.
4. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
5. All undimensioned pictorial configurations are for reference purposes only.
6. Full threads to within .063 inch (1.60 mm) of shoulder.
7. Series SC, socket contact interface, in accordance with MIL-STD-348.

FIGURE 1. General configuration – Continued.

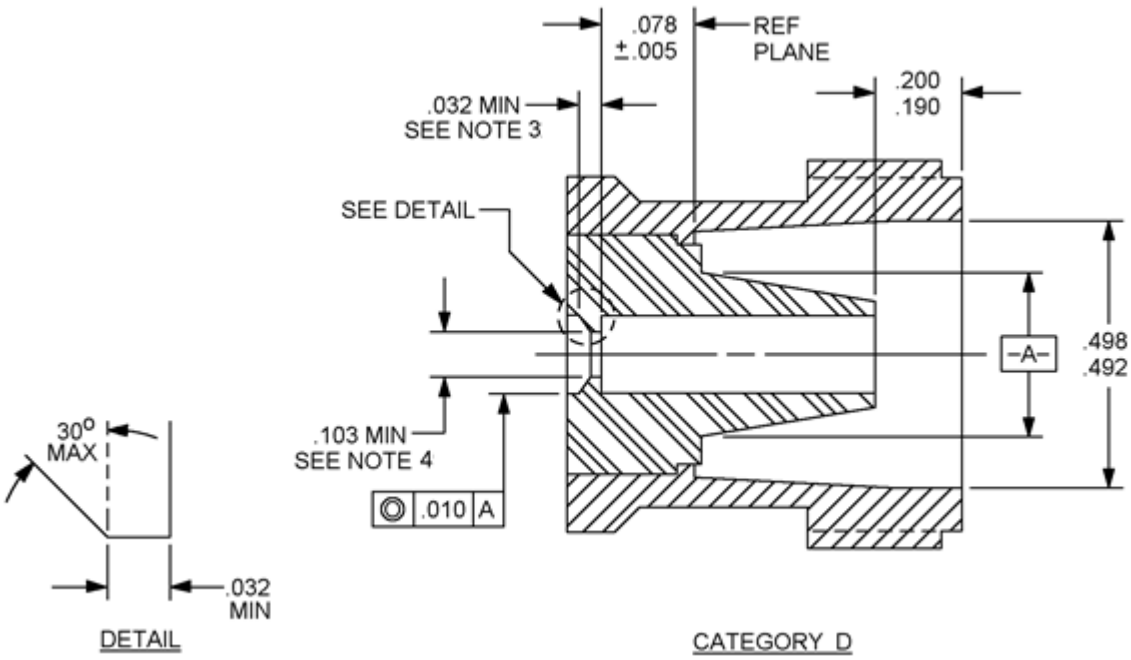

Inches	mm	Inches	mm
.005	0.13	.190	4.82
.010	0.25	.200	5.08
.032	0.81	.492	12.49
.078	1.98	.498	12.65
.103	2.61		

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. All undimensioned pictorial configurations are for reference purposes only.
3. Chamfer is optional. If chamfer is used, put chamfer on a 30° maximum.
4. Dimension to meet connector performance requirements.

FIGURE 2. Mating dimensions for socket termination, category D only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions.

Dash No. 1/	Applicable cable 2/ M17/	Dimensions	Inches * (millimeters)	
			Minimum	Maximum
CATEGORY A – FIELD SERVICEABLE (NO SPECIAL TOOLS REQUIRED) 3/				
X023	Cable group VIII 2-RG6 4/ 180-00001 4/ 112-RG304 5/	A C	.985 (25.02)	2.100 (53.34) 1.045 (26.54)
X024	Cable group X 6-RG11 4/ 181-00001 4/ 62-RG144 4/ 127-RG393 5/ 86-00001 6/			
X026	Cable group XII 78-RG217 5/			
X019	Cable group XIII 72-RG211 161-00001			
X027	Cable group XIV 79-RG218 5/			
X025	Cable group XI 74-RG215 5/			
X028	Cable group IX 92-RG115 5/ 6/			

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions – Continued.

Dash No. 1/	Applicable cable 2/ M17/	Dimensions	Inches * (millimeters)	
			Minimum	Maximum
CATEGORY C – FIELD REPLACEABLE (SAE AS22520/5 CRIMP TOOL) SEE NOTE NEXT TO APPLICABLE CABLE GROUP FOR CRIMP DIE 3/ 7/				
X014	Cable group VIII 8/ 2-RG6 4/ 180-00001 4/ 112-RG304 5/	A C	.915 (23.24)	2.030 (51.56) 1.045 (26.54)
X015	Cable group XA 9/ 65-RG165 5/ 6/			
X016	Cable group XB 9/ 127-RG393 5/ 86-00001 6/			
X017	Cable group XD 9/ 77-RG216 4/ 8/ 191-00001 4/			
X018	078-RG217 4/ 8/			
X021	Cable group XC 9/ 62-RG144 4/ 5/ 6/			
X022	Cable group IX 9/ 92-RG115 5/ 6/			
CATEGORY D – FIELD REPLACEABLE – DEFINED PIECE PARTS 3/ 7/ 10/				
X501	Cable group XB 127-RG393 5/ 86-00001 6/	A C	2.030 (51.56) 1.045 (26.54)	
X502	Cable group XA 65-RG165 5/			
X503	Cable group VIB 128-RG400 5/ 60-RG142 6/			

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions – Continued.

1/ For cross reference of dash number to superseded Part or Identifying Number (PIN) or type designation, see table IV.

2/ The latest version of each cable shall be applicable.

3/ These connectors have captivated center contacts.

4/ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage and insertion loss are not applicable.

5/ Cable to be used when performing tests requiring cable except as in 4/ and 6/.

6/ Cable to be used for the +200°C temperature cycling tests.

7/ These connectors are assembled, using the applicable crimp tool, to the specified cable stripped as shown on figures 3 and 4.

8/ M22520/5-35 closure A or M22520/5-55 closure A.


9/ M22520/5-61.

10/ Complete connector assembly shall consist of a body, center contact, ferrule, and assembly instructions.

* Dimensions are in inches. Metric equivalents are given for information only.

X Denotes connector body plating material option. The only plating options allowable are Silver or Nickel over brass in accordance with MIL-PRF-39012. Only connectors of the same materials shall be mated to avoid dissimilar metal problems. **CAUTION: A NICKEL PLATED BODY IS NOT FOR USE IN APPLICATIONS WHERE PASSIVE INTERMODULATION GENERATION (PIM) MAY BE A CONCERN.** (**https://www.amphenolrf.com/library/download/link/link_id/584611**/). Silver is the preferred plating option.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

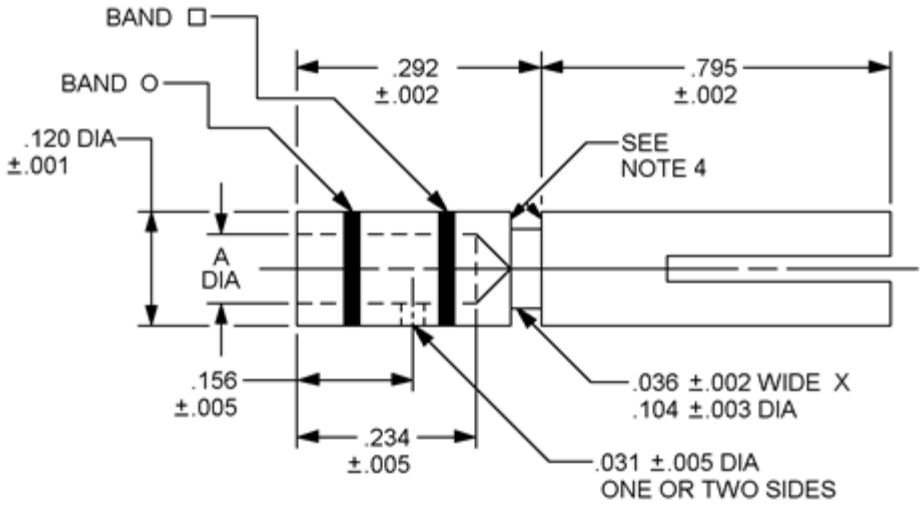

CENTER CONTACT

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.001	0.03	.043	1.09	.250	6.35	.600	15.24
.002	0.05	.098	2.49	.292	7.42		
.003	0.08	.104	2.64	.375	9.52		
.005	0.13	.120	3.05	.418	10.62		
.015	0.38	.156	3.96	.438	11.13		
.031	0.79	.220	5.59	.492	12.50		
.036	0.91	.234	5.94	.500	12.70		


Dash No.	Contact No. 1/	A (inches)	Basic crimp tool 2/	Crimp die or positioner	Crimp tensile minimum	Color band □	Color band 0
X501 X502	40-10	.098 ±.002	M22520/1-01	M22520/1-14	60 pounds (266.90 N)	Red	Gold
X503	40-11	.043 +.001 - .002			20 pounds (88.96 N)	Blue	

1/ Contact numbers are for identification purposes only.
2/ Class 2 tool may be used by OEM (see SAE AS22520).

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.
2. Contact material shall be beryllium copper within one year from the date of this specification. Phosphor bronze contacts are acceptable for government use until stock is purged.
3. Crimp tensile test shall be in accordance with SAE AS39029.
4. Maximum break of .003 inch (0.08 mm).
5. Copyright notice: All information disclosed in this specification sheet which is or may be copyrighted is reproduced herein with the express permission of the copyright owner.
6. Color bands shall be positioned such that no coloring material enters the inspection hole.

FIGURE 3. Contact and ferrule dimensions for category D only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

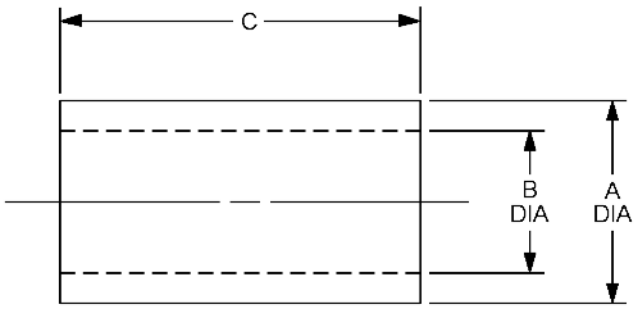


CRIMP FERRULE

Dash No.	Ferrule No. 1/	A	B	C ±.015	Basic crimp tool 2/	Crimp die or positioner M22520/5-
X501	40-50	.492 ±.003	.438 ±.003	.600	M22520/5-01	25 closure A or 61
X502	40-51	.492 ±.003	.418 ±.003	.600		
X503	40-52	.250 ±.003	.220 ±.003	.500		5, 11, 57 closure A or 19 closure B

1/ Ferrule numbers are for identification only.
2/ Class 2 tools may be used by OEM (see SAE AS22520).

FIGURE 3. Contact and ferrule dimensions for category D only – Continued.

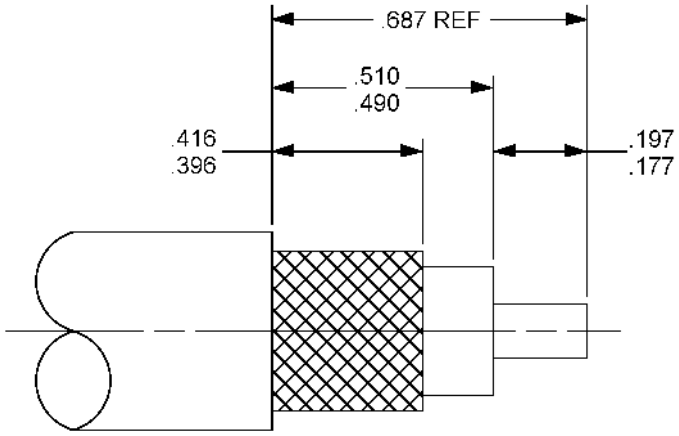

Inches	mm
.177	4.50
.197	5.00
.396	10.06
.416	10.57
.490	12.45
.510	12.95
.687	17.45

NOTES:
1. Dimensions are in inches. Metric equivalents are given for information only.

FIGURE 4. Cable stripping dimensions for field replaceable connectors.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Nominal impedance: 50 ohms.

Frequency range: 0 to 11 GHz.

Voltage rating: 1,000 volts rms maximum working voltage at sea level.
250 volts rms maximum at 70,000 feet 4.437 kPa).

Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and MIL-STD-348.

Force to engage and disengage:

Longitudinal force: Not applicable.

Torque: 6 inch-pounds, maximum (.68 Nm).

Coupling proof torque: Not applicable.

Inspection conditions: For each test of threaded coupling connector where the test is performed on mated pairs, the pairs shall be torqued to 6 to 10 inch-pounds (.68 to 1.13 Nm).

Mating characteristics: See MIL-STD-348 and figure 2 for dimensions.

Center contact (socket):

Oversize test pin: .098 inch (2.49 mm) diameter minimum, (non-closed entry contacts only).

Test pin finish: 16 microinches (0.406 µm).

Insertion depth: .125 inch (3.17 mm), minimum.

Number of insertions: 1

Insertion force test:

Steel test pin diameter: .092 inch (2.34 mm), minimum.
Insertion depth: .125 inch (3.17 mm), minimum.
Test pin finish: 16 microinches (0.406 µm).
Insertion force: 2 pounds (8.90 N), maximum.

Withdrawal force test:

Steel test pin diameter: .090 inch (2.29 mm), maximum.
Insertion depth: .125 inch (3.17 mm), minimum.
Test pin finish: 16 micro inches (0.406 µm).
Withdrawal force: 2 ounces (.56 N), minimum.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

Hermetic seal: Not applicable.

Leakage (pressurized connectors): Not applicable.

Insulation resistance: In accordance with MIL-STD-202-302, 5,000 mega ohms minimum.

Center contact retention:

Axial force: 15 pounds (66.72 N) minimum, for all cables except M17/60-RG142 and M17/128-RG400 which shall be 6 pounds (26.69 N) minimum. Applicable to captivated center contacts only.

Radial torque: Not applicable.

Corrosion (salt spray): In accordance with MIL-STD-202-101, condition B.

Voltage standing wave ratio (VSWR): From 500 MHz to 11 GHz, or approximately 80 percent of the upper cutoff frequency of the cable, whichever is lower; 1.30, maximum.

Swept frequency VSWR setup:

Item 6: VSWR shall be less than 1.015 +.005F (F in GHz).

Item 16: VSWR shall be less than 1.015 +.005F (F in GHz).

Second set of VSWR checkout procedure – VSWR shall be less than 1.045 +.019F (F in GHz).

Group B inspection – VSWR shall be less than 1.10 +.01F (F in GHz).

Qualification and group C inspection – VSWR shall not exceed 1.15.

Connector durability: 500 cycles minimum at 12 cycles per minute maximum. The connector shall meet mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms, maximum.

	Initial	After environment
Center contact:	1.0	1.5
Outer contact (silver):	.15	Not applicable
Outer contact (nickel):	.30	Not applicable
Braid to body:	.05	Not applicable

Dielectric withstanding voltage at sea level: In accordance with MIL-STD-202-301. 3,000 volts rms minimum at sea level for connectors using other than M17/60-RG142 and M17/128-RG400 cables. 1,500 volts rms for connectors using these cables.

Vibration, high frequency: In accordance with MIL-STD-202-204, test condition B.

Shock: In accordance with MIL-STD-202-213, test condition I.

Thermal shock: In accordance with MIL-STD-202-107, test condition B, except test high temperature shall be +85°C. High temperature shall be +200°C for connectors using +200°C cables (see tables I and III).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

Moisture resistance: In accordance with MIL-STD-202-106. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level:

Voltage: 750 volts minimum.

Altitude: 70,000 feet (4.437 kPa).

RF high potential withstanding voltage:

Voltage and frequency: 2,500 volts rms tested at a frequency from 5 to 7.5 MHz.

Leakage current: Not applicable.

Cable retention force:

Non-crimp assemblies: 75 pounds (333.62 N) minimum.

Crimp assemblies:

50 lbs. (222.41 N) minimum for cables .155 -.189 inch (3.94 – 4.80 mm) OD.
60 lbs. (266.90 N) minimum for cables .190 - .229 inch (4.83 – 5.82 mm) OD.
75 lbs. (333.62 N) minimum for cables .230 - .249 inch (5.84 – 6.32 mm) OD.
90 lbs. (400.34 N) minimum for cables .250 inch (6.35 mm) OD and larger.

Coupling mechanism retention force: Not applicable.

RF leakage: -90 dB minimum, tested at frequency between 2 and 3 GHz.

RF insertion loss:

.15 dB maximum at 9 GHz.

$.05\sqrt{F\ (GHz)}\ dB$ maximum tested at 3 and 6 GHz.
Group qualification: See table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

TABLE II. Group qualification and retention testing. 1/

Group	Submission and qualification of any of the following connectors 2/ M39012/	Qualifies the following connectors M39012/
I	38-X010 40-X024	38-X010 38-X011 38-X012 38-X013 40-X023 40-X024 40-X025 40-X028
II	38B0015 40B0031	38B0015 38B0016 38B0017 40B0031 40B0029 40B0035
III	38-X006 40-X015	38-X006 38-X007 38-X008 38-X018 40-X006 40-X016 40-X014 40-X022
IV	38-X501 38-X502 40-X501 40-X502	38-X501 38-X502 38-X503 40-X501 40-X502 40-X503
V	38-X503 40-X503	38-X503 40-X503

1/ If a connector manufacturer produces a connector which meets all the requirements for two or more connector PINs (within the same series), the manufacturer may receive qualification approval for two or more connector PINs by qualifying the one connector. It is not necessary that such connectors be in the same group. Each connector, however, must be marked with its own appropriate PIN. For group qualification, the connectors must be of similar design.

2/ For qualification retention, where more than one part is listed in a group in this column, data may be supplied on any of those parts in order to retain qualification for those parts in the corresponding right-hand column. The part does not necessarily have to be the part initially qualified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

TABLE III. Category B – non-field replaceable (special tools may be required). 1/

NOT FOR ARMY, NAVY, OR AIR FORCE USE. FOR OEM USE ONLY

PIN 2/ 3/ M39012/40B	Applicable cable 4/ M17	Dimensions	Inches (millimeters) 8/	
			Minimum	Maximum
0029	073-RG212 5/ 112-RG304	A C	.915 (23.24)	2.100 (53.34) 1.045 (26.54)
0030	065-RG165 6/ 074-RG213 5/			
0031	75-RG214 5/ RG-225/U 6/			
0032	078-RG217 5/			
0033	6-RG11 7/ 62-RG144 6/ 7/			
0034	77-RG216 7/			
0035	92-RG115 6/			

1/ For maintenance replacements for category B, see table V.
2/ For cross-reference of dash number to superseded PIN or type designation, see table IV.
3/ These connectors have captivated center contacts.
4/ The latest version of each cable shall be applicable.
5/ Cable to be used when performing tests requiring cable except as in 6/ and 7/.
6/ Cable to be used for the +200°C temperature cycling tests.
7/ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage and insertion loss are not applicable.
8/ Dimensions are in inches. Metric equivalents are given for information only.

TABLE IV. Supersession data. 1/

Preferred PIN M39012/40	Superseded PIN or type designation
-0006	
-0007	M23329/5-11
-0008	M23329/5-12
-0009	
-0012	
-0013	
-0014	
-0015	M23329/5-15
-0016	
-0017	

See notes at end of table.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

TABLE IV. Supersession data - Continued. 1/

Preferred PIN M39012/40	Superseded PIN or type designation
-0018	
-0019	
-0020	
-0021	
-0022	
-0023	M39012/40-0001
-0024	M39012/40-0002
-0025	M39012/40-0003
-0026	M39012/40-0004
-0027	M39012/40-0005
-0028	
B0029	M39012/40-0006, M39012/40-0029
B0030	M39012/40-0007, M39012/40-0030
B0031	M39012/40-0008, M39012/40-0031
B0032	M39012/40-0009, M39012/40-0032
B0033	M39012/40-0012, M39012/40-0033
B0034	M39012/40-0013, M39012/40-0034
B0035	M39012/40-0035
-0501	
-0502	
-0503	

1/ The superseded PIN or type designation is for reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. The PIN M39012/40-XXXX shall be used in all cases for marking and identifying the connector.

TABLE V. Maintenance replacements for category B.

Category B number 1/	Category C dash number	Category A dash number	Category D dash number
B0006	0014	0023	-------
B0007	0015	0024	0502
B0008	0016	0025	0501
B0009	0018	0026	-------
B0012	0021	-------	-------
B0012	0017	-------	-------
B0029	0014	0023	-------
B0030	0015	0024	0502
B0031	0016	0024	0501
B0032	0018	0026	-------
B0033	0021	-------	-------
B0034	0017	-------	-------
B0035	0022	0028	-------

1/ Category B connectors are for original installation only. They will not be stocked or procured by the government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-39012, this document references the following:

FED-STD-H28
MIL-STD-202-101
MIL-STD-202-106
MIL-STD-202-107
MIL-STD-202-204
MIL-STD-202-213
MIL-STD-202-301
MIL-STD-202-302
MIL-STD-348
SAE AS22520
SAE AS22520/5
SAE AS39029

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85
NASA - NA
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2021-117)

Review activities:
Army - AT, AV, EA
Navy - AS, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:56Z
Check the source to verify that this is the current version before use.