
FED. SUP CLASS
2540

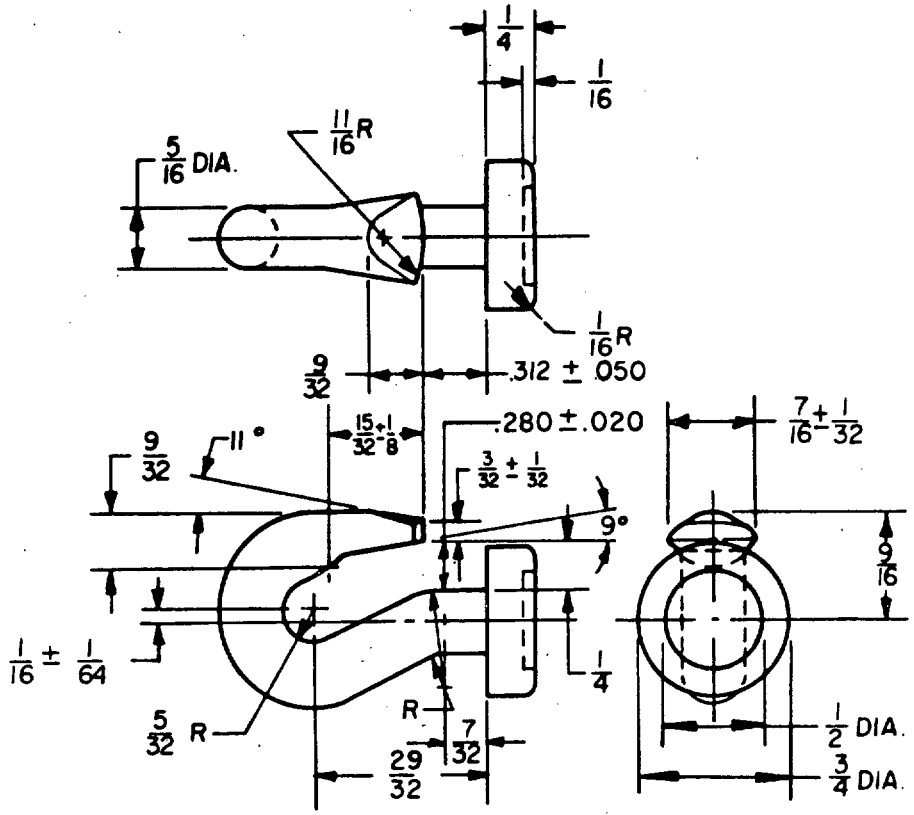

NOTES:

1. MATERIAL:
   WASHER: STEEL STRIP CARBON HOT ROLLED PICKLED AND OILED (HRP&O) SPEC. ASTM A569, OR COLD ROLLED, TEMPERED, OPTIONAL SPEC. ASTM A109.
   HOOK: STEEL WIRE, CARBON, GRADE 1013-1022, ANNEALED OR SPHEROIDIZED IN PROCESS, SPEC. ASTM A548 STRESS RELIEVE AFTER COLD HEADING.
2. PROCESSING - HOOK AND WASHER: CASE HARDEN, TOTAL CASE DEPTH 0.010-0.020 QUENCH & TEMPER, SURFACE HARDNESS ROCKWELL A 77 MINIMUM OR EQUIVALENT.
3. FINISH: THIS HOOK ASSEMBLY SHALL HAVE A CLEAN, SCALE FREE FINISH.
4. UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES; TOLERANCES: ± 1/16 ON FRACTIONS, ± 1° ON ANGLES.
5. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCURMENT DOCUMENTS REFERENCED HEREIN.
7. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, OR REFERENCED DOCUMENTS.
8. MARKING SHALL CONSIST OF THE MS PART NUMBER AND THE MANUFACTURE'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD-130 OR MIL-STD-129.

APPROVED 16 JUNE 1966 REVISED (D) 16 SEPT 1986

(D) ENTIRE STANDARD REVISED

MS PART NO.	FORMER DWG NO.
MS 500058-1	10944282

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE HOOK, SWIVEL: TIRE CHAIN (SIZE "A")	MILITARY STANDARD MS500058 (AT)
PROCUREMENT SPECIFICATION MIL-C-62040	SUPERSEDES:		SHEET 1 OF 1

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 2540-A002

USER ACTIVITIES:

REVIEWER ACTIVITIES:

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense. AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:46Z
Check the source to verify that this is the current version before use.