
FED. SUP CLASS
5950

RATINGS

STYLE	LT4
GRADE	1
CLASS	B
MAXIMUM OPERATING TEMPERATURE	125°C
TEMPERATURE RISE	35°C
AMBIENT TEMPERATURE	90°C
WORKING VOLTAGE	535 VOLTS
TERMINAL PULL	5 POUNDS
ALTITUDE	70,000 FEET

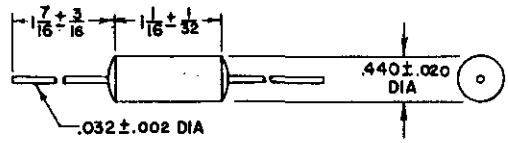

ALL DIMENSIONS IN INCHES

ELECTRICAL CHARACTERISTICS (INITIAL)

Dash No. 1/	Type designation	Replaced type designation	Replaced MS part No.	Inductance	Q min.	Test frequency	Self-resonant frequency, min.	DC resistance max.	Rated dc current 2/
				uh		Mc	Mc	Ohms	ma
-1	LT4K158	LT8K067	MS16444-1	4.7 ±5%	80	7.90	73.0	0.21	1,540
-2	LT4K159	LT8K068	MS16444-2	5.6 ±5%	80	7.90	64.0	0.24	1,440
-3	LT4K160	LT8K069	MS16444-3	6.8 ±5%	80	7.90	61.0	0.33	1,230
-4	LT4K161	LT8K070	MS16444-4	8.2 ±5%	81	7.90	56.0	0.43	1,075
-5	LT4K162	LT8K071	MS16444-5	10.0 ±5%	82	7.90	51.0	0.60	910
-6	LT4K163	LT8K072	MS16444-6	12.0 ±5%	53	2.50	46.0	0.83	775
-7	LT4K164	LT8K073	MS16445-1	15.0 ±5%	53	2.50	42.0	1.15	725
-8	LT4K165	LT8K074	MS16445-2	18.0 ±5%	54	2.50	35.0	1.60	615
-9	LT4K166	LT8K075	MS16445-3	22.0 ±5%	53	2.50	20.0	0.17	1,890
-10	LT4K167	LT8K076	MS16445-4	27.0 ±5%	53	2.50	18.0	0.24	1,590
-11	LT4K168	LT8K077	MS16445-5	33.0 ±5%	53	2.50	16.5	0.33	1,360
-12	LT4K169	LT8K078	MS16445-6	39.0 ±5%	36	2.50	15.0	0.37	1,280
-13	LT4K170	LT8K079	MS16445-7	47.0 ±5%	37	2.50	13.5	0.50	1,100
-14	LT4K171	LT8K080	MS16445-8	56.0 ±5%	37	2.50	12.5	0.68	945
-15	LT4K172	LT8K081	MS16445-9	68.0 ±5%	37	2.50	11.0	0.92	810
-16	LT4K173	LT8K082	MS16445-10	82.0 ±5%	40	2.50	10.0	1.25	695
-17	LT4K174	LT8K083	MS16445-11	100.0 ±5%	42	2.50	9.2	1.40	660
-18	LT4K175	LT8K084	MS16445-12	120.0 ±5%	73	0.79	8.3	1.95	560
-19	LT4K176	LT8K085	MS16445-13	150.0 ±5%	77	0.79	7.4	2.80	465
-20	LT4K177	LT8K086	MS16445-14	180.0 ±5%	78	0.79	6.8	3.60	410
-21	LT4K178	---	---	220.0 ±5%	80	0.79	6.1	4.90	350
-22	LT4K179	LT8K087	MS16445-15	250.0 ±5%	80	0.79	5.7	5.40	335
-23	LT4K180	---	---	270.0 ±5%	80	0.79	5.5	7.00	295
-24	LT4K181	---	---	330.0 ±5%	80	0.79	4.9	8.00	275

1/ The dash number and military-standard number constitutes the MS part number; for example MS -1.

2/ Peak [illegible] current shall be dc and 1½ times the rated dc current.

CANCELLED AUG 72
NO SUCCESSOR DOCUMENT

ELECTRICAL CHARACTERISTICS (FINAL)

Inspection group	Allowable variation from initial measurement			
	Inductance	Q	Self-resonant frequency	DC resistance
	Percent	Percent	Percent	Percent
Qualification inspection:				
Group II	2	20	2	2
Group III	2	10	2	2
Acceptance inspection:				
Group B	2	10	2	2
Group C	2	10	2	2

NOTES:
1. THE BAROMETRIC-PRESSURE TEST (TEST-CONDITION LETTER C) IS APPLICABLE.
2. INITIAL INSULATION-RESISTANCE TEST, AND INSULATION-RESISTANCE MEASUREMENTS FOLLOWING OTHER TESTS, ARE APPLICABLE.
3. THE TEMPERATURE-RISE, TERMINAL-TWIST, AND SHOCK (METHOD I, CONDITION C, 50G) TESTS ARE APPLICABLE.
4. THE POLARIZING VOLTAGE DURING THE MOISTURE-RESISTANCE TEST IS APPLIED WITH THE POSITIVE LEAD CONNECTED TO THE COIL TERMINALS TIED TOGETHER, AND THE NEGATIVE LEAD CONNECTED TO THE METAL STRAP.
5. REFERENCED DOCUMENT SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
6. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENT REFERENCED HEREIN.
7. VIBRATION-TEST II, TEST CONDITION B, IS APPLICABLE, IN ADDITION UNITS SHALL BE RIGIDLY MOUNTED BY THE BODY.

APPROVED 9 May 1963 REVISED (A) 25 Aug 1972

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. MI Other Cust EL ASD	TITLE COILS, RADIOFREQUENCY, PLASTIC ENCASED, TYPES LT4K158 TO LT4K181, INCL.	MILITARY STANDARD MS 75056	
PROCUREMENT SPECIFICATION MIL-C-15305	SUPERSEDES:	SHEET 1 OF 1	

5950-0434-6

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:27Z
Check the source to verify that this is the current version before use.