


FED. SUP CLASS
6685

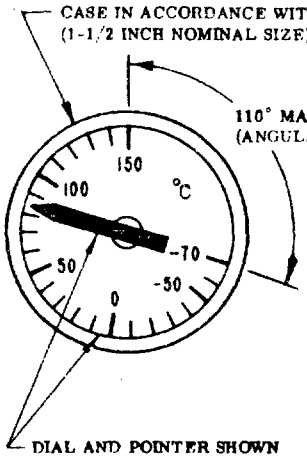

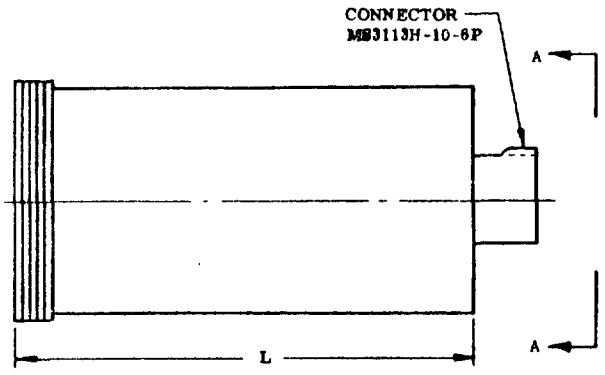

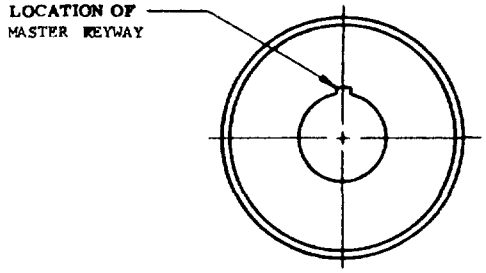

VIEW A - A

(B) DASH NO. (SEE NOTE 2)	RANGE TEMP °C	INDICATOR 1-1/2 INCH SIZE	CASE LENGTH L
-1 -2 -4 -5	-70 TO +150 -70 TO +50 -50 TO +75 -50 TO +300	UNLIGHTED	3 MAX
-8 -9 -11 -12	-70 TO +150 -70 TO +50 -50 TO +75 -50 TO +300	LIGHTED	4 MAX

NOTE:

1. DIMENSIONS IN INCHES.

(B) 2. FOR LIGHTED INDICATORS, -8,-9,-11, AND -12, THE COMPLETE PART NUMBER MUST INCLUDE THE LETTER "W" FOR WHITE LIGHTING OR THE LETTER "R" FOR RED LIGHTING.

EXAMPLE:

MS90322-9W = WHITE LIGHTED INDICATOR.
MS90322-9R = RED LIGHTED INDICATOR.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 15 SEPT 1964 REVISED (A) 29 JUN 1972 (B) 14 DEC 73

P.A. NAVY - AS Other Cust ARMY - AV USAF - 11	TITLE INDICATOR, TEMPERATURE, ELECTRICAL RESISTANCE, VOLTAGE COMPENSATED, MULTIFUNCTION	MILITARY STANDARD MS90322
PROCUREMENT SPECIFICATION MIL-I-21049	SUPERSEDES MS90322(AS)	SHEET 1 OF 1

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER SYMBOLS: NAVY - MC, CG

REVIEWER SYMBOLS:

Review user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:34Z
Check the source to verify that this is the current version before use.