
FED.SUP CLASS
1660

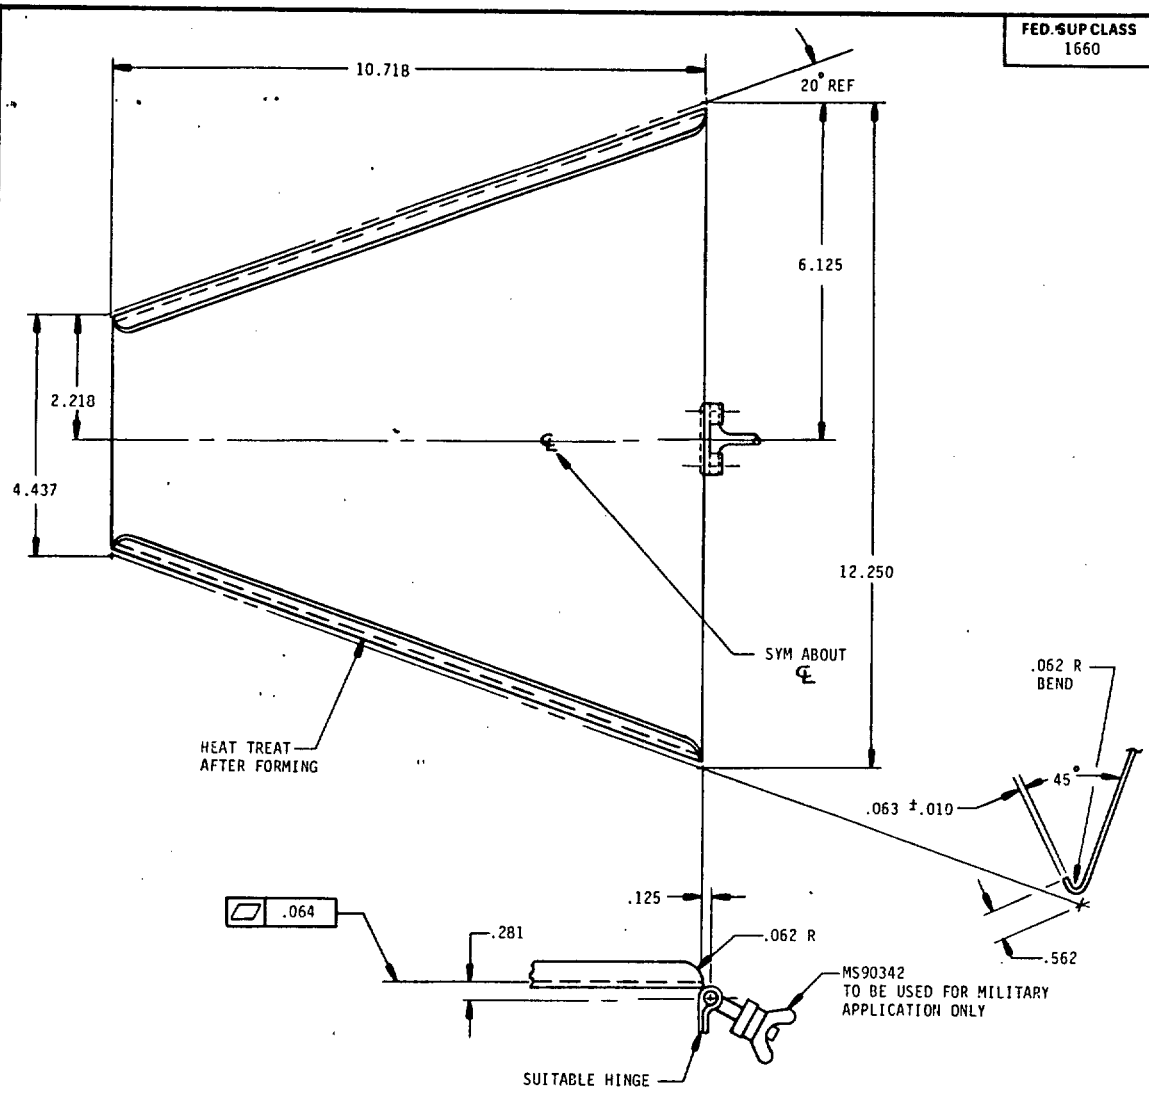

NOTES:

1. MATERIAL: STEEL, CORROSION AND HEAT RESISTANT, AMS 5512.
2. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.015, ANGLES ± 1/2°
3. THIS DRAWING SHOWS THE MOUNTING BRACKET WHICH MATES WITH THE MOUNTING BASE OF CONVERTER MIL-C-19303, AND MIL-C-19328.
4. THE DESIGN OF THE PROVISION FOR MOUNTING THE CONVERTER MOUNTING BRACKET TO THE AIRFRAME IS AT THE OPTION OF THE AIRFRAME CONTRACTOR.
5. PARTS SHOWN ON THIS DRAWING ARE NOT PART OF THE CONVERTER ASSEMBLY AND SHALL BE FURNISHED BY THE AIRFRAME CONTRACTOR.
6. CERTIFICATION OF CONFORMANCE SHALL BE REQUIRED FOR MATERIAL.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(8) REVISED AND REDRAWN

APPROVED 15 MAY 1965 REVISED (8) 17 OCT 85

P.A. NAVY — AS Other Cust AIR FORCE - 11	TITLE MOUNTING BRACKET, CONFIGURATION, MATING PORTION FOR 5 AND 10 LITER LIQUID OXYGEN CONVERTERS	MILITARY STANDARD MS90341
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: ACEL DWG C1042	SHEET 1 OF 1

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PROJECT NO. 1660-0534

USER SYMBOLS:

REVIEWER SYMBOLS:
USAF — 11, 71

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:35Z
Check the source to verify that this is the current version before use.