
NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST:
ARMY - AV
NAVY - AS, CG, MC
AF - 17

REVIEWER INTEREST:
ARMY - MI, EL, MI
NAVY - AS, SH
AF - 11, 85

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

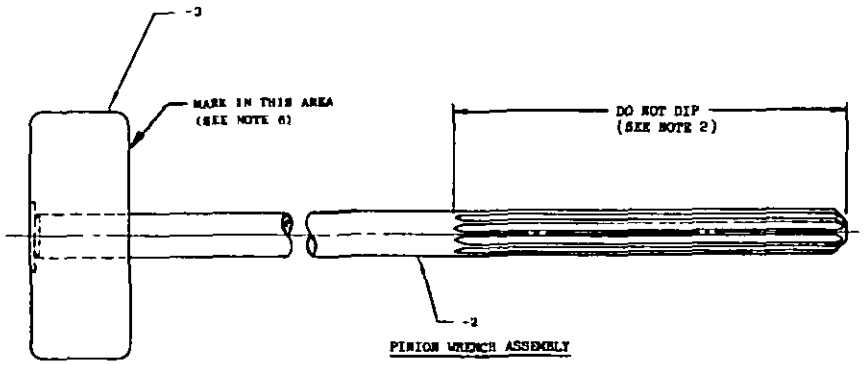

PINION WRENCH ASSEMBLY

DASH NO.
-1

NOTES:

1. MATERIAL: a. -2 SHAFT: STEEL, CORROSION RESISTING, QQ-S-763, CLASS 410, CONDITION A, ANNEALED
   b. -3 HANDLE: MOLDED PHENOLIC RESIN, THERMOSETTING, MIL-M-14, TYPE CFG.
2. FINISH: WRENCH ASSEMBLY; DIP IN TT-V-119 VARNISH, SPAR, PHENOLIC RESIN, EXCEPT AS NOTED.
3. HEAT TREATMENT: -2 SHAFT: HEAT TO 1800° - 1825° F, QUENCH IN OIL, DRAW TO ROCKWELL C 30-35, APPROX DRAW TEMP 950° F.
4. REMOVE ALL BURRS AND BREAK ALL SHARP EDGES.
5. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: DECIMALS ±.010, ANGLES ±5°. INTERPRET DIMENSIONING AND TOLERANCING IN ACCORDANCE WITH MIL-STD-8.
6. THE MARKING ON EACH PINION WRENCH ASSEMBLY SHALL INCLUDE THE MS PART NUMBER AND LATEST REVISION LETTER, USING 1/8 HIGH CHARACTERS.


FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY - AS Other Cust ARMY - MI NAVY - AS AF - 11	TITLE WRENCH, PINION (STRAIGHT)	MILITARY STANDARD MS90393
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: BUORD 644660, 577036, 577087	SHEET 1 OF 2


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5990

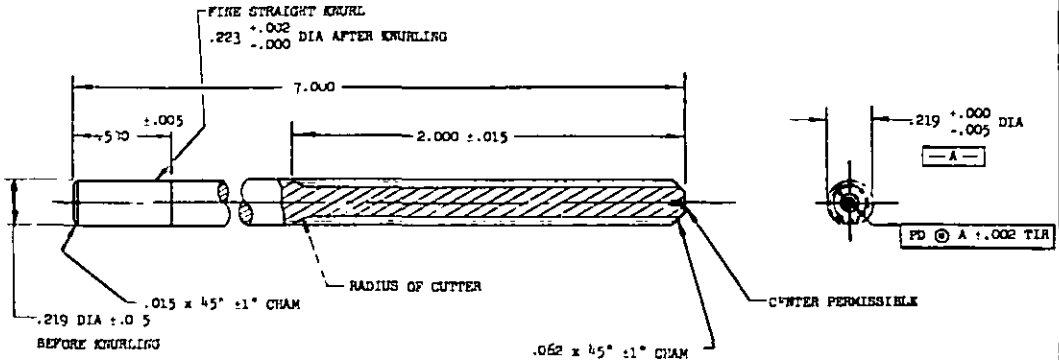

-2 SHAFT

GEAR DATA	
TOOTH FORM	FULL DEPTH TRUE INVOLUTE
PRESSURE ANGLE	20°
NO. OF TEETH	12
DIAMETRAL PITCH	64
PITCH DIAMETER (DATUM)	.1875
ROOT DIA (MAX)	.146
BACKLASH	.0010 +.0015 -.0000

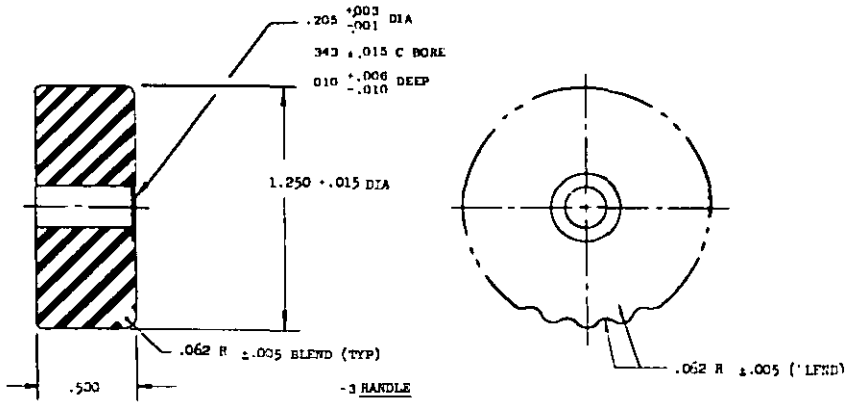

-3 HANDLE

GROOVE DATA	
NO. OF GROOVES	20
DEPTH	.048

NOTICE - REVIEW/USER INFORMATION IS CURRENT AS OF DATE OF THIS DOCUMENT. FOR FUTURE COORDINATION OF CHANGES TO THIS DOCUMENT, DRAFT CIRCULATION SHOULD BE BASED ON THE INFORMATION IN THE CURRENT DODISS.

USER INTEREST:
ARMY - AV
NAVY - AS, CG, ME
AF - 17

REVIEWER INTEREST:
ARMY - MI, EL, MI
NAVY - AS, ...
AF - 11, 85

This military standard is approved by the Department of Defense and is mandatory for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 6 JUNE 1967 REVISED

P.A. NAVY - AS Other Cust ARMY - MI NAVY - AS AF - 11	TITLE WRENCH, PINION (STRAIGHT)	MILITARY STANDARD MS90393
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: HAND 644663, 677035, 677027	SHEET 2

DD FORM 672-1 (Coordinated)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:36Z
Check the source to verify that this is the current version before use.