
This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities: Army MI, MU, AV, WC; Navy SH, EC, OS; Air Force 11 85; DSA ES

User activities: Army WE AT; Navy MC; Air Force

FED SUP CLASS
5935

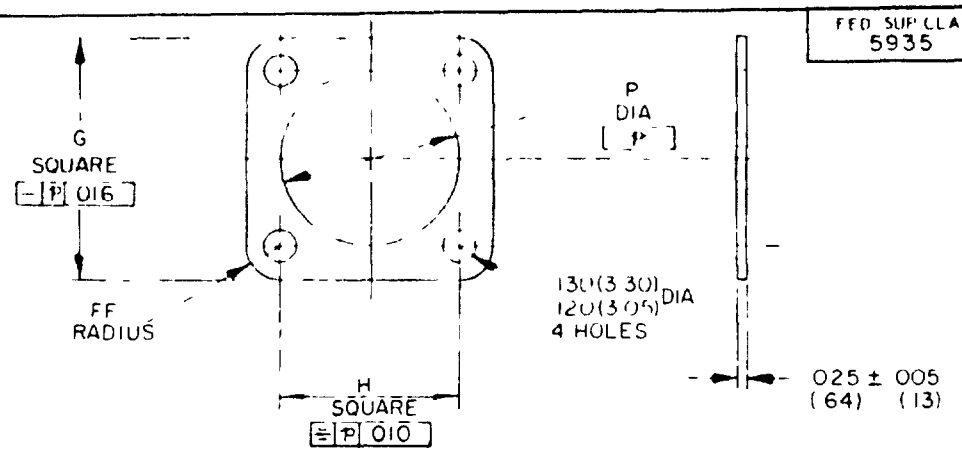

Part number	Shell size	G square	H square	P dia	FF radius	Dia 4 holes
MS90484 8	8	.820 (20 83) .804 (20 42)	599 (15 21) .589 (14.96)	.570 (14.48) 555 (14 10)	.120 (3 05) .090 (2.29)	.130 (3.30) .120 (3.05)
MS90484 10	10	.945 (24.00) 929 (23 60)	.724 (18 39) .714 (18.14)	.695 (17.65) .680 (17.27)	.120 (3 05) 090 (2 29)	.130 (3.30) .120 (3.05)
MS90484 14	14	1.133 (28.78) 1.117 (28.37)	.911 (23.14) .901 (22 89)	.945 (24.00) .930 (23.62)	120 (3 05) .090 (2.29)	.130 (3.30) .120 (3.05)
MS90484 16	16	1.258 (31.95) 1.242 (31 55)	.974 (24.74) 964 (24 49)	1.071 (27.20) 1.056 (26.82)	.150 (3 81) 120 (3.05)	130 (3.30) .120 (3.05)
MS90484 18	18	1.351 (34.32) 1.335 (33.91)	1 067 (27 10) 1.057 (26.85)	1 195 (30 35) 1.180 (29 97)	150 (3 81) .120 (3.05)	130 (3.30) .120 (3.05)
MS90484 20	20	1.475 (37.47) 1 459 (37 06)	1.161 (29.49) 1 151 (29 24)	1.320 (33.53) 1 305 (33.15)	.150 (3.81) 120 (3.05)	.130 (3.30) .120 (3 05)
MS90484 22	22	1.570 (39.88) 1.554 (39.47)	1 255 (31.88) 1.245 (31.62)	1 445 (36 70) 1.430 (36.32)	150 (3.81) .120 (3.05)	.130 (3.30) .120 (3.05)
MS90484-24	24	1.711 (43.46) 1.695 (43.05)	1.380 (35 05) 1.370 (34.80)	1.570 (39.88) 1.555 (39.50)	.150 (3.81) .120 (3.05)	.157 (3.99) .147 (3 73)

NOTES
1. Dimensions are in inches
2. Millimeters are in parentheses
3. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm
4. This gasket to be used with flange mount receptacles conforming to MIL C 81511
5. Referenced documents shall be of the issue in effect on date of invitation for bids
6. For design feature purposes this standard takes precedence over procurement documents referenced herein

Example of part number

MS90484-8-1 Size 8 gasket made of silicone
- 1 — Material (see material code)
- 8 — Connector shell size

Material code
- -1 Silicone rubber per ZZ R 765
- -2 Conductive rubber maximum volume resistivity 10 x 10^{3} ohm-CM, maximum use temperature -55 C to 200 C

APPROVED 15 MARCH 67 REVISED (A) 1 MAY 68 (B) 5 JUNE 1970

P A NAVY-AS Other Cust ARMY-EL AF 17	International interest	TITLE GASKET, FLANGE MOUNT, CONNECTOR, ELECTRIC	MILITARY STANDARD MS 90484
Procurement Specification NONE		SUPERSEDES	SHEET 1 OF 1

DD FORM 10 APR 64 672 (Originated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-1646-44

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:37Z
Check the source to verify that this is the current version before use.