INCH-POUND

MS90579A
7 November 2005
SUPERSEDING
MS90579
25 July 1968


DETAIL SPECIFICATION SHEET

ADAPTER, CONNECTOR, BETWEEN SERIES (SERIES QL SOCKET TO SERIES C SOCKET) JAM NUT MOUNT, TYPE UG-1375/U

Inactive for new design 15 June 1999

This specification is approved for use by all Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-27434.

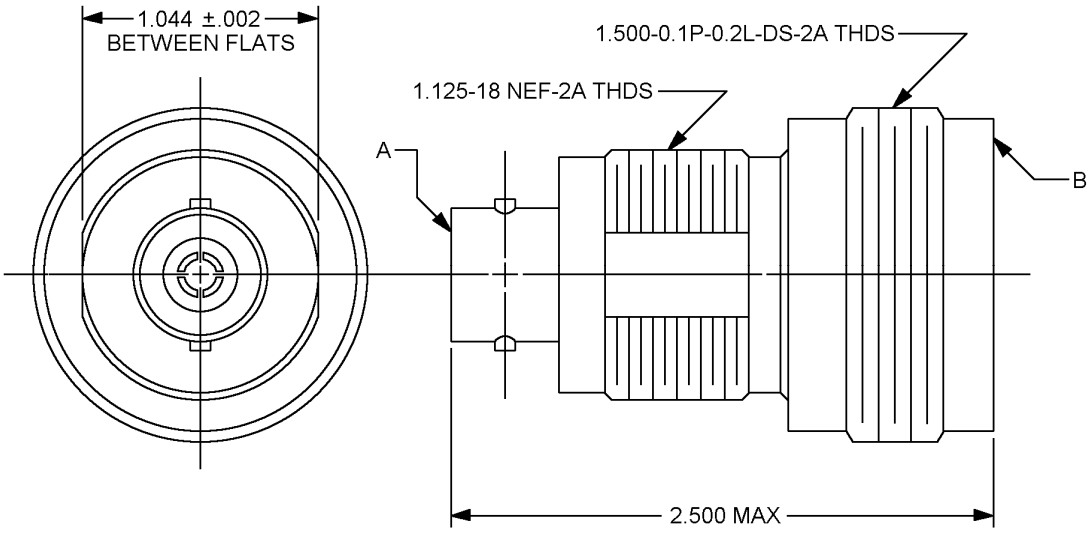

Inches	mm
.002	.05
1.044	26.52
2.500	63.50

Reference	Series	Contact
A	C	Socket
B	QL	Socket

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. Series C socket contact and series QL socket contact in accordance with MIL-STD-348.

FIGURE 1. Type UG-1375/U Connector.

AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

Dimensions and configuration: In accordance with Figure 1, MIL-STD-348 and the following drawings.

SM-B-424110	Lubricant “O” Ring
SM-B-424111	Compound, Anti-seize
SM-B-424112-2	“O” Ring
SM-B-424112-3	“O” Ring
SM-B-424112-5	“O” Ring
SM-C-424146-1	Body
SM-B-424147	Plug
SM-B-424148	Conductor
SM-B-424149	Insert
SM-B-424150	Insulator
SM-B-424151	Insulator
SM-B-424152	Nut, Panel

Impedance: 50 Ohms.

Frequency range: 5 GHz, maximum.

Voltage rating: 1000 volts rms, maximum.

Dielectric withstanding voltage: 3,000 volts, rms.

Corrosion: Method 101 of MIL-STD-202 test condition B.

Finish: Center contact. The male pin shall be plated to a minimum gold thickness of 50 micro inches (1.27μm) in accordance with ASTM B488, type II, Code C, class 1.27, over 50 micro inches (1.27μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, measured anywhere along the mating surface, for all series. The socket contact shall be plated to a minimum of 50 micro inches (1.27 μm) of gold in accordance with ASTM B488, type II, Code C, class 1.27, over 50 micro inches (1.27 μm) minimum of nickel in accordance with SAE-AMS-QQ-N-290, class 1, including the I.D., measured at a depth of .040 inch minimum. The plating on non-significant surfaces in the I.D. shall be of sufficient thickness to ensure plating continuity and uniform utility and protection. This plating may consist of an underplate only. A silver underplate shall not be permitted.

Finish: All other parts shall be silver plated to a minimum thickness of 0.0002 inches (0.005 mm) in accordance with ASTM B700.

Part or Identifying Number (PIN): MS90579-1375.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

Referenced documents. In addition to MIL-DTL-27434, this document references the following:

MIL-STD-202
MIL-STD-348
ASTM B488
SAE-AMS-QQ-N-290
ASTM B700
SM-B-424110
SM-B-424111
SM-B-424112-2
SM-B-424112-3
SM-B-424112-5
SM-C-424146-1
SM-B-424147
SM-B-424148
SM-B-424149
SM-B-424150
SM-B-424151
SM-B-424152

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy - EC
Air force - 11
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-4750-000)

Review activities:
Navy – AS, CG, MC, OS
Air Force - 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.