INCH-POUND

MS27236A
22 September 2000
SUPERSEDING
MS27236
6 August 1964

DETAIL SPECIFICATION SHEET

SHOULDER - DESIGNED FOR 45° AND 90° SWIVEL NUT HOSE TO TUBE ADAPTERS, REUSABLE, HYDRAULIC, FUEL AND OIL LINES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5070E.

REQUIREMENTS.

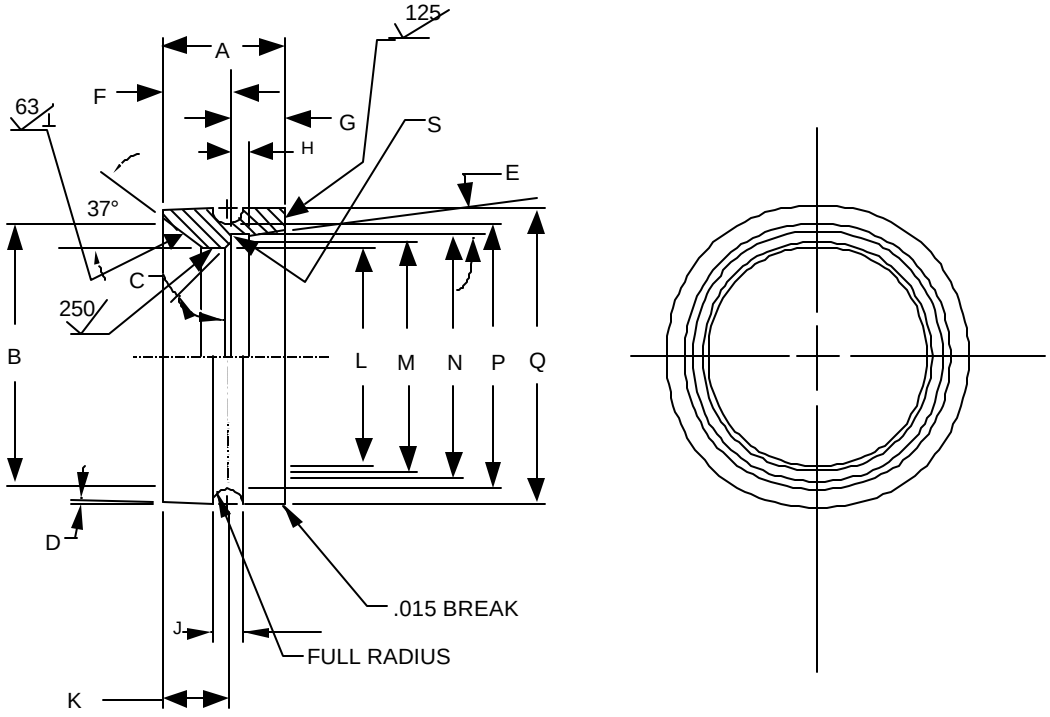

FIGURE 1. Shoulder illustration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.

TABLE I. Shoulder composition.

PIN MS27236	A ±.007	B Dia	C	D	E	F	G (ref)	H	J
-4	.344	.305 .285	0º	0º	30º	.190 .185	.156	.118 .089	.076
-5	.406	.365 .345				.253 .248			.086
-6	.422	.445 .425				.269 .264			
-8	.437	.580 .560	34º	2º	10º	.285 .280		.046 .031	.100
-10	.500	.690 .670		1.5º		.347 .342			
-12	.531	.860 .840				.284 .279	.250		.130
-16		1.118 1.088						.077 .062	
-20	.594	1.425 1.395				.347 .342			
-24	.656	1.640 1.610				.409 .404			
-32	.781	2.255 2.225				.534 .529		.046 .031	

PIN MS27236	K ±.002	L Dia	M Dia	N Dia	P Dia	Q Dia	S
-4	.129	.178		.254 .251	.298 .293	.384 .379	.015 x 45º max. break
-5	.173	.209		.316 .313	.346 .341	.447 .442	
-6	.196	.272		.379 .376	.403 .398	.504 .499	
-8	.225	.365	.420	.504 .501	.564 .559	.684 .679	.015 .010 radius
-10	.261	.490	.545	.629 .626	.679 .674	.800 .795	
-12	.214	.615	.670	.754 .751	.821 .816	.972 .967	
-16	.243	.865	.920	1.004 1.001	1.088 1.080	1.219 1.213	.030 radius
-20	.322	1.115	1.170	1.254 1.251	1.385 1.377	1.531 1.525	
-24	.338	1.329	1.420	1.504 1.501	1.638 1.630	1.781 1.775	
-32	.414	1.829	1.920	2.004 2.001	2.263 2.255	2.406 2.400	.015 .010 radius

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.

Intended use. This part is a component of MS27223 and MS27225.

Dimensions and tolerances. Dimensions are in inches. Unless otherwise specified, tolerances are as follows: angles ±.5°; decimals ±.005. Break or radius all corners .010/.005 (max./min.). All diameters shall be concentric within .010 total indicator reading.

Materials: Sizes -4 through -6: 1137 steel, cold drawn, in accordance with ASTM A108.
Sizes -8 through -32: aluminum alloy 6061, T651, in accordance with SAE AMS QQ-A 225/8.

Surface roughness. Unless otherwise specified, maximum surface roughness shall be 125 µin R_a in accordance with ASME B46.1.

Workmanship. Break all sharp edges and remove all burrs and slivers.

Identification of product. The part or identifying number (PIN) and the manufacturer's Commercial and Government Entity (CAGE) Code or trademark shall be permanently marked on the shoulder or on a removable tag securely attached to the shoulder. The PIN for this part shall be as shown in table I (e.g., MS27236-4).

Order of precedence. This specification sheet takes precedence over the documents referenced herein. Unless otherwise specified in the solicitation, referenced documents shall be of the issue in effect on the date of solicitation.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 99
DLA - CC

Review activities:
Army - AV
Navy - MC, SA
Air Force - 11, 82

Preparing activity:
DLA - CC

(Project 4730-0709)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.