INCH-POUND

MS27237D
22 September 2000
SUPERSEDING
MS27237B
6 January 1976
(See page 3)

DETAIL SPECIFICATION SHEET

SHOULDER, SWIVEL FLANGE, ADAPTER, HOSE TO TUBE, HYDRAULIC FUEL AND OIL LINES. 1/2 THROUGH 3 IN. TUBING SIZES

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-5070E.

REQUIREMENTS.

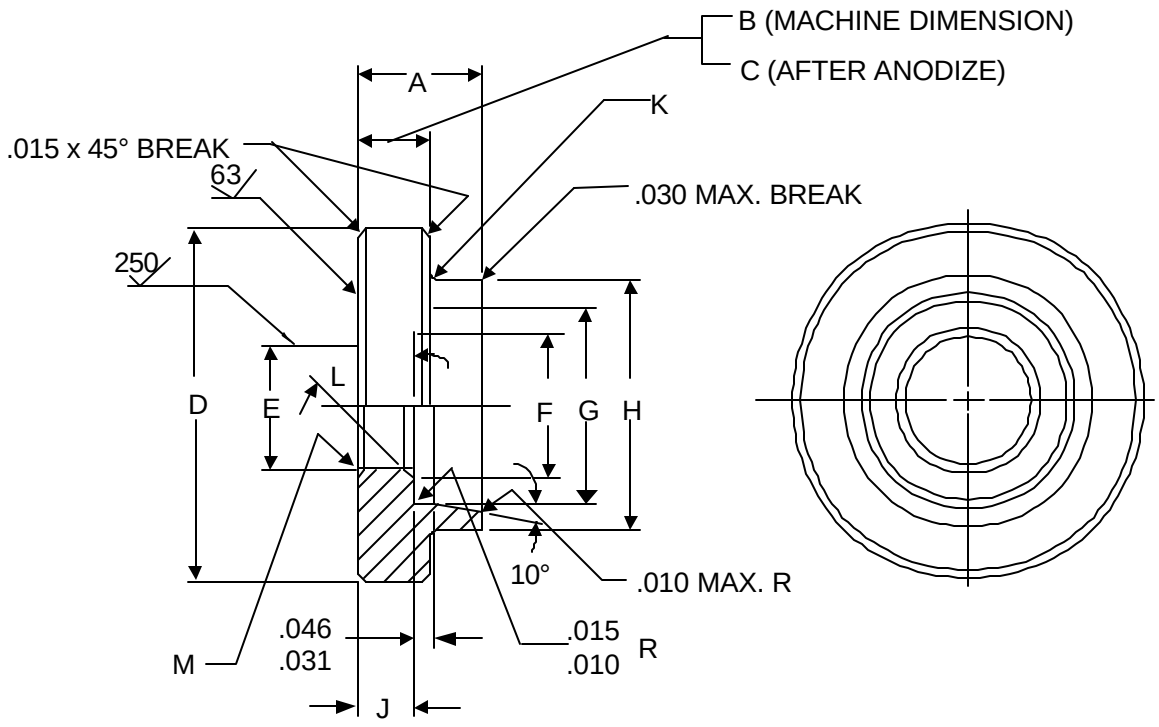

FIGURE 1. Shoulder illustration.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.

TABLE I. Shoulder composition.

PIN MS27237	A ±.015	B	C	D +.000 -.005 Dia	E Dia	F Dia	G Dia	H Dia	J	K ±.015 Rad	L	M
-8	.271			.875	.365	.420	.504 .501	.625 .610	.118 .113	.047		.030 x 45º break
-10				1.000	.490	.545	.629 .626	.750 .735				
-12		.156 .153	.156 .151	1.250	.615	.670	.754 .751	.938 .923			45º	-
-16				1.500	.865	.920	1.004 1.001	1.188 1.173				-
-20				1.844	1.115	1.170	1.254 1.251	1.500 1.485				-
-24	.312			2.125	1.329	1.420	1.504 1.501	1.750 1.735	.065 .060	.062		-
-32		.188 .185	.188 .183	2.750	1.829	1.920	2.004 2.001	2.375 2.360			34º	-
-40				3.281	2.180	2.295	2.379 2.376	2.875 2.860				-
-48				3.781	2.805	2.920	3.004 3.001	3.375 3.360				-

Intended Use. This part is a component of MS27227 and MS27229.

Dimensions and tolerances. Dimensions are in inches. Unless otherwise specified, tolerances are as follows: angles ±.5°; decimals ±.005. Break or radius all corners .010/.005 (max./min.). All diameters shall be concentric within .010 total indicator reading.

Materials. Aluminum alloy 6061, T651, in accordance with SAE AMS-QQ-A-225/8.

Surface roughness. Unless otherwise specified, maximum surface roughness shall be 125 µin R_a in accordance with ASME B46.1.

Workmanship. Break all sharp edges and remove all burrs and slivers.

Identification of product. The part or identifying number (PIN) and the manufacturer's Commercial and Government Entity (CAGE) Code or trademark shall be permanently marked on the shoulder or on a removable tag securely attached to the shoulder. The PIN for this part shall be as shown in table I (e.g., MS27237-8).

Order of precedence. This specification sheet takes precedence over the documents referenced herein. Unless otherwise specified in the solicitation, referenced documents shall be of the issue in effect on the date of solicitation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.

Supersession information. MS27237B (formerly identified as MS27237, Revision 2) was canceled by MS27237C (formerly identified as MS27237, Revision 3). MS27237B was reinstated by MS27237C, Notice 1, dated 22 September 2000. Therefore, this document supersedes MS27237B.

CHANGES FROM PREVIOUS ISSUE. Marginal notations are not used in this revision to identify changes with respect to the previous issue, due to the extent of the changes.

CONCLUDING MATERIAL

Custodians:
Army - AT
Navy - AS
Air Force - 99
DLA - CC

Review activities:
Army - AV
Navy - MC, SA
Air Force - 11, 82

Preparing activity:
DLA - CC

(Project 4730-0899)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:19Z
Check the source to verify that this is the current version before use.