INCH-POUND
MIL-L-0044259B(GL)
2 January 1990
USED IN LIEU OF
MIL-L-44259A
6 November 1987

MILITARY SPECIFICATION

LIGHT SET, PORTABLE, FLUORESCENT

This specification is approved for use by the Natick Research, Development, and Engineering Center, Department of the Army, based on currently available technical information but it has not been approved for promulgation as a coordinated revision of MIL-L-44259A. It is subject to modification. However, pending its promulgation as a coordinated military specification, it may be used in acquisition.

1. SCOPE

1.1 Scope. This document covers a light set for use with the Tent, Extendable, Modular, Personnel (TEMPER) and the Standard Integrated Command Post System (SICPS).

1.2 Classification. The light sets shall be of the following types:

Type I - Set of four lights (TEMPER)
Type II - Set of two lights (SICPS)

1.3 Part or identifying number (PIN). A document based PIN to identify the type of light set is included in section 6 (see 6.5).

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A

FSC 6230

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

L-P-390	-	Plastic, Molding and Extrusion Material Polyethylene and Copolymers
PPP-B-601	-	Box, Wood, Cleated-Plywood
PPP-B-636	-	Boxes, Shipping, Fiberboard

MILITARY

MIL-C-3432	-	Cable (Power and Special Purpose) and
	-	Wire, Electrical (300 and 600 Volts)
MIL-P-26514	-	Polyurethane Foam, Rigid or Flexible, for Packaging
MIL-B-5423	-	Boots, Dust and Water Seal 1 (For Toggle and Pushbutton Switches, Circuit Breakers, and Rotary Actuated Parts), General Specification For

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-108	-	Definition of and Basic Requirement for Enclosure
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-202	-	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	-	Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference
MIL-STD-462	-	Electromagnetic Interference Characteristics, Measurement of

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

MIL-STD-810 - Environmental Test Methods

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents, drawings, and publications. The following other Government documents, drawings, and publications form a part of this document to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DRAWINGS

U.S. ARMY NATICK RESEARCH, DEVELOPMENT AND ENGINEERING CENTER

5-4-4005	-	Strap, Light Support Assembly
5-4-6721	-	Strap, Light Support Assembly, Type II Light
5-4-6772	-	Container Assembly, Storage Type II
5-4-6774	-	Label, Wiring Diagram
5-4-6822	-	Label, Caution & ID
5-4-6824	-	Container Assembly, Storage Type I
5-4-6829	-	Label
5-4-6830	-	Label, Arrow
5-4-6832	-	Label, Container
5-4-6875	-	Label, Date of MFG

(Copies of drawings are available from the U.S. Army Natick Research, Development, and Engineering Center, ATTN: STRNC-EMSS, Natick, MA 01760-5014.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

NATIONAL FIRE PROTECTION ASSOCIATION (NFPA)

NFPA No. 70 National Electrical Code

(Application for copies should be addressed to the National Fire Protection Association, 1 Batterymarch Park, P.O. Box 9101,Quincy, MA 02269-9101.)

AMERICAN NATIONAL STANDARDS INSTITUTE, INC. (ANSI)

C82.1-1985 - Ballasts for Fluorescent Lamps - Specification

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, NY 10018.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

(Non-Government standards and other publications are normally available from organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Materials and components. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer provided the complete item complies with all provisions of this document. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.2.1 Alternate components. Components shall be as specified herein. For components for which it is stated "or equal", if the contractor proposes to use an item considered to be equal to the component specified, prior to its use the contractor shall furnish a sample of the component, with supporting data to the contracting officer for subsequent evaluation by the responsible military agency. The supporting data required shall prove the functional equivalence and the design compatibility of the item proposed to be used. Prior to manufacture of the first article, the contractor shall submit for the contracting officer's approval, a list identifying each proposed alternate component, together with proof that each listed component complies with the requirements specified herein. The contracting officer, at his option, may require a physical sample of the proposed substitution. Approval of the submitted listing, together with necessary supporting data, authorizes the commencement of the first article or production manufacture, as applicable, and does not relieve the contractor of the responsibility that these components perform in accordance with specified requirements when incorporated into the end product.

3.3 Design and construction.

3.3.1 Light set. The type I light set is used with the TEMPER tent and shall consist of four light assemblies with lamps, four light support strap assemblies in accordance with drawing 5-4-4005, one spare lamp, and one light set storage container with a maximum weight of 45 pounds. The type II light set is used with the SICPS and shall consist of two light assemblies with lamps and light filters, four light support strap assemblies in accordance with drawing 5-4-6721, one spare lamp, and one light set storage container with a maximum weight of 75 pounds.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

3.4 Electrical characteristics.

3.4.1 Safety. The requirements for elements of safety for items specified shall implement and conform to the safety standards issued by the Occupational Safety and Health Administration (OSHA) under the Secretary of Labor. Design and assembly of each light assembly shall comply with the applicable requirements of NFPA No. 70.

3.4.2 Input voltage. The light assembly shall operate on a voltage of 120 plus or minus 5 volts alternating current at 50 to 60 Hertz (Hz) ±5 Hz.

3.4.3 Input current. The input current drawn per light assembly shall be a maximum of 0.7 amp with a minimum power factor of 0.70, when tested as specified in 4.4.5.

3.4.4 Electrical switch. The light assembly shall be designed so that power will pass through the light assembly to the next light assembly when connected in series regardless of the position of the ON/OFF switch.

3.4.5 Ballast. The ballast circuit shall include an automatic resetting thermal protector and power factor corrected .90 minimum. The temperature rating shall be consistent with the capabilities of material and components in the ballast. The ballast shall be designed and assembled to conform to ANSI C82.1-1985 unless requirements in this specification state otherwise. The ballast shall operate on either 50 or 60 Hz ±5 Hz, and shall function properly when tested as specified in 4.5.1 through 4.5.13.

3.4.6 Interconnection of lights. The lights shall be of a design to provide for interconnecting a string of up to 12 lights maximum. Feed through power connectors and wiring shall be rated for 10 amp maximum load. Each light shall operate independent of the through power circuit.

3.4.7 Dielectric strength. The light assembly shall be capable of withstanding 1,000 volts AC, 60 Hz between supply terminals (black and white) and with ground lead (green) grounded for a maximum period of 15 seconds when tested as specified in 4.5.7.

3.4.8 Electromagnetic capability. The complete light assembly shall meet the basic electromagnetic interference limits as specified for class B, category RE 02 and CE 03 equipment of MIL-STD-461 when tested as specified in 4.5.1.

3.4.9 Continuity-insulation resistance. Each of the electrical light set assemblies shall have a direct current (DC) resistance of less than 1 ohm when tested for electrical continuity as specified in 4.5.8. In addition, insulation resistance shall be greater than 100 megaohms when tested as specified in 4.4.5.

3.4.10 Illumination. The light set shall provide a minimum illumination of 40 footcandles when measured 18 inches from the surface of the assembly at the

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

midpoint of the assembly using a cosine corrected photometer probe when tested as specified in 4.5.4.

3.4.10.1 Filter (for type II only). The blue filter shall reduce the illumination of the light set to 12 - 16% when measured 35.00 +1/4-inch from the surface of the assembly at the midpoint and at either end using a cosine corrected photometer probe when tested as specified in 4.5.4.1 (see 6.4).

3.5 Performance.

3.5.1 High and low temperature storage. The sample light set shall show no evidence of parts chipping, cracking, discoloration, extruding of impregnating or potting compounds, warping, deformation, or other defects detrimental to the intended function when tested for high temperature storage and cold temperature storage as specified in 4.5.10.

3.5.2 High temperature operation. Each of the light assemblies from the sample light sets shall show no evidence of parts chipping, cracking, warping, deformation, improper operation, failure to stay illuminated, or other defects detrimental to their intended function when tested for high temperature operation as specified in 4.5.11.

3.5.3 Humidity. The sample light set shall show no evidence of swelling of materials due to moisture absorption, degradation of electrical properties in insulating materials, electrical shorts, oxidation, galvanic corrosion, failure of lamps to light, or other defects which are detrimental to the intended function when tested for humidity as specified in 4.5.12.

3.5.4 Vibration. The sample light set shall show no evidence of wire chafing, loose parts, touching or shorting of electrical parts, component fatigue, cracking of material, permanent deformation, failure of lamps to light, or other defects detrimental to the intended function when tested for vibration as specified in 4.5.13.

3.5.5 Static loading. The sample light set shall show no evidence of cracking of material, permanent deformation, breaking or warping of parts, failure of container to protect the lamp assemblies, or other defects detrimental to its intended function when tested for static loading as specified in 4.5.14.

3.5.6 Noise levels. Each of the light assemblies from the sample light set shall be operated in series. The audible noise shall not exceed 50 decibels sound performance level (SPL) at 1 foot from the light unit when tested as specified in 4.5.15.

3.5.7 Low temperature performance. Each of the light assemblies from the sample light set shall be capable of starting at 0°F when tested as specified in 4.5.2 and 4.5.3. The light assembly shall start within 15 seconds, continue illumination, and properly operate for 1 hour after start up. Reduced light output is acceptable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

3.6 Interchangeability. All light assemblies containing like part numbers manufactured to the requirements of this document shall be physically and functionally interchangeable without selection or fitting when tested as specified in 4.5.16.

3.7 Labels. The labels shall conform to Drawings 5-4-6774, 5-4-6822, 5-4-6829, 5-4-6830, 5-4-6832 and 5-4-6875. The contents of the labels shall be clearly legible and shall be firmly affixed to the light set in the required locations with no areas of poor or no adhesion. The labels shall be free of tears and scratches.

3.8 Workmanship. Light assemblies shall be manufactured and processed in such a manner as to be uniform in quality and free from defects that will affect life, serviceability, or appearance. Metal components shall be free of burrs and sharp edges. Assemblies shall not contain loose, broken, inoperative, or otherwise damaged parts. Parts and assemblies shall be clean and free of oils, solder fluxes, and other extraneous matter; threaded parts shall show no evidence of looseness, cross threading, or stripping; wire insulation shall show no evidence of burns, abrading, or pinch marks; and solder connections shall have a smooth bright appearance with metallic luster and shall not have a chalky, gritty, or irregular surface nor exhibit any protrusions, pits, or voids. Finish shall be smooth and uniform without sags, pinholes, blisters, scratches, wrinkles, foreign matter imbedded in finish, or tackiness.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4 and tested for the characteristics specified in table I and 4.4.5.

TABLE I. First article tests

Characteristic	Requirement paragraph	Test method
Electromagnetic compatibility	3.4.8	4.5.1
Illumination	3.4.10	4.5.4
Light reduction	3.4.10.1	4.5.4.1
Cold starting at 60 Hz	3.5.7	4.5.2
Cold starting at 50 Hz	3.5.7	4.5.3
Thermal protector	3.4.5	4.5.6
Dielectric strength	3.4.7	4.5.7
Insulation resistance	3.4.9	4.5.9
High and low temperature storage	3.5.1	4.5.10
High temperature operation	3.5.2	4.5.11
Resistance to humidity	3.5.3	4.5.12
Resistance to vibration	3.5.4	4.5.13
Static loading	3.5.5	4.5.14
Noise levels	3.5.6	4.5.15
Interchangeability	3.6	4.5.16

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents, unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document.

4.4.2 In-process inspection. Inspection of subassemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance. Inspection shall be made of the following fabrication operations to establish conformance with specified requirements:

a. That color coded wire is used throughout the wiring of the light assembly and is in agreement with the wiring schematic and that the wire is of the specified wire size.

b. That all materials are properly coated or protected from corrosion effects.

c. That all electrical wires are properly routed and insulated to prevent abrasion from sharp edges.

d. That all mounting hardware is properly secured.

e. That all soldering is in accordance with specified requirements and soldered connections have complete fusion, no excess solder, no porosity or inclusions, and all flux has been removed.

f. That any crimp-type electrical fasteners are secure on the wires and that no wire strands are broken or not secured within the fastener.

g. That wiring schematic is displayed on the ballast chamber.

Whenever nonconformance is noted, correction shall be made to the item affected and the process. Items which cannot be corrected shall be removed from production.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table II. The lot size shall be expressed in units of light sets. The sample unit shall be one complete light set. The inspection level shall be II. The acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 2.5 for major defects and 6.5 for total (major and minor combined) defects.

TABLE II. End item visual defects

Examine	Defect	Classification Major	Minor
Finish	Not adherent, e.g., blistered, peeled, or flaky		201
	Coating not continuous or uniform i.e., not coated or area of no film		202
	Scratch, dig, or abrasion exposing bare metal or primer		203
Color	Not color specified	101	

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Electrical cable	Not proper size or type	102	
	Cut or abrasion	103	
Electrical connector	Missing or not correct part number	104	
Electrical connector boot cover	Missing or not correct part number		204
Light straps	Not as specified	105	
Design and workmanship	Sharp edge or burr	106	
	Puncture, fracture, or malformed	107	
	Design detail deviating from document	108	
	Evidence of rust or deposit of any foreign matter		205
Light switch	Missing or not correct switch	109	
Light switch weather boot	Missing		206
Fuse assembly	Missing or not correct amperage	110	
Spare fuse	Missing or not correct amperage		207
Spare fuse holder	Missing		208
Markings or labels	Omitted, incorrect, illegible, misplaced		209

4.4.4 End item dimensional examination. The light set shall be examined for dimensional defects listed in table III. The lot size shall be expressed in units of complete light sets. The sample unit shall be one complete light set. The inspection level shall be II. The AQL, expressed in terms of defects per hundred units, shall be 2.5 for major defects and 10 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

TABLE III. End item dimensional defects

Examine	Defect	Classification Major	Minor
Overall dimensions (individual light assemblies)	Smaller than specified less applicable minus tolerance	101	
	Larger than specified dimensions and applicable plus tolerances		201
Overall dimensions (storage container)	Dimensions not as specified	102	

4.4.5 End item testing. The complete light set shall be tested for the characteristics listed in table IV. The lot size shall be expressed in terms of complete light sets. The sample unit shall be one complete light set. The inspection level shall be S-4. Failure of any test shall be cause for rejection of the lot.

TABLE IV. End item tests

Characteristic	Requirement paragraph	Test method
Current draw	3.4.3	4.5.5
Electrical continuity	3.4.9	4.5.8

4.4.6 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-4. The AQL, expressed in terms of defects per hundred units, shall be 6.5.

Examine	Defect
Marking (interior exterior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Materials	Any component missing, damaged, or not as specified
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of flap, improper taping, loose strapping or inadequate stapling
	Bulged or distorted container
Content	Number of light sets per container is more or less than required

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

4.5 Methods of inspection.

4.5.1 Electromagnetic compatibility test. Each of the light assemblies from the sample light set shall be tested in accordance with test methods CE 03 and RE 02 of MIL-STD-462. Failure of any light assembly to meet the limits specified in MIL-STD-461 (see 3.4.8) shall constitute a test failure.

4.5.2 Cold starting test at 60 Hz. Each of the light assemblies from the sample light set shall be cold soaked for 4 hours at a temperature of 0°F. While maintaining a temperature of 0°F, an electric power of 120± 5 volts, 60 Hz shall be applied to each light assembly and the light operated for a minimum of 1 hour. Failure of any light assembly to properly operate or conform to the requirements of 3.5.7 shall constitute a test failure.

4.5.3 Cold starting test at 50 Hz. Each of the light assemblies from the sample light set shall be cold soaked for 4 hours at a temperature of 0°F. While maintaining a temperature of 0°F, an electric power of 120± 5 volts, 50 Hz shall be applied to each light assembly and the light operated for a minimum of 1 hour. Failure of any light assembly to properly operate or conform to the requirements of 3.5.7 shall constitute a test failure.

4.5.4 Illumination test. Each light assembly from the sample set shall be tested for illumination when operating at 120 ±5 volts, 60 Hz, and a maximum current of 0.7 amperes in an atmosphere of 77 ±5°F. Failure to provide illumination as specified in 3.4.10 shall constitute a test failure.

4.5.4.1 Filter test. Each filter from the sample set shall be tested for light reduction when the light set is operating under conditions specified in 4.5.4. Failure to provide the conditions specified in 3.4.10.1 shall constitute a failure.

4.5.5 Current draw test. Each light assembly from the sample light set shall be tested for current draw when operating at 120 ±5 volts, 60 Hz. Any light assembly exceeding 0.7 amp with a minimum power factor of 0.70, as specified in 3.4.3, shall constitute a test failure. Repeat this test at 120 ±5 volts and 50 Hz.

4.5.6 Thermal protector test. One ballast assembly (or a represented standard ballast circuit) shall be tested for automatic resetting thermal protection. Place ballast which operates one external F40 lamp at 120 V AC, 60 Hz inside an oven or similar chamber. Place a thermocouple on the ballast case. Soak the operating ballast for a minimum of 2 hours at 140°F and record stabilized case temperature and input current. Increase ambient temperature at 10 degree increments allowing case to stabilize at each increment until thermal protector opens. Record case and ambient temperatures and input current at each increment. Return chamber to 140°F and observe normal operation. Record input current. Failure to conform to the requirements of 3.4.5 shall constitute a test failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

4.5.7 Dielectric protector test. One light assembly from the sample light set shall be tested for a dielectric load for the period as specified in 3.4.7. Any inability to accept the specified voltage for this minimum time period without disruptive discharge or any current leakage shall constitute a test failure.

4.5.8 Electrical continuity for light set assemblies. Each conductor in the electrical light set assembly shall be tested in accordance with Method 303 of MIL-STD-202. The test current shall not exceed 15 milliamperes. Measurement shall be made between each connector pin which is mutually common to each other electrically. The continuity for each pin shall be checked for compliance with the continuity requirement of 3.4.9 and failure to conform to continuity requirement shall constitute a test failure.

4.5.9 Insulation resistance for light set assemblies. With the light switch "OFF", the light set assembly shall be tested in accordance with Method 302 of MIL-STD-202. The test potential shall be 500 volts, test condition B. Insulation resistance measurement shall be made between the mutually insulated points and between insulated points and shell or ground. Each resistance measurement shall be checked for compliance with the continuity requirement of 3.4.9 and failure to conform to the continuity requirement shall constitute a test failure.

4.5.10 High and low temperature storage test. The sample light set in its packaged form shall be tested for high temperature storage in accordance with Method 501, procedure I of MIL-STD-810. The test temperature and cycle shall be as specified under hot induced conditions with a minimum of seven complete cycles. The sample light set shall then be tested for low temperature storage in accordance with Method 502, procedure I of MIL-STD-810. The test temperature shall be severe cold (C3) (-60°F) with the duration of exposure at 8 hours. After each storage test the sample light assemblies shall be removed from the test chamber, allowed to stabilized at room temperature, then operated. Failure to conform to the requirements of 3.5.1 shall constitute a test failure.

4.5.11 High temperature operation test. Each of the sample light assemblies shall be tested for high temperature operation in accordance with method 501, procedure II of MIL-STD-810. The test temperatures and cycle shall be as specified under hot, ambient air conditions. The light assemblies shall be hooked up in series and shall be operated through three complete temperature cycles. Failure to conform to the requirements of 3.5.2 shall constitute a test failure.

4.5.12 Humidity test. The sample light shall be tested for resistance to humidity with storage container cover in the open position and the light assemblies set up in series and exposed to chamber conditions. The test shall be conducted in accordance with Method 507, procedure I, cycle 2 (quick look) of MIL-STD-810. Operational checks are required during testing as specified in MIL-STD-810. During operational checks, the light assemblies shall be operated for 1 hour under chamber conditions. Failure to conform to the requirements of 3.5.3 shall constitute a test failure.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

4.5.13 Vibration test. The sample light set shall be tested for resistance to vibrations encountered during transport in the field. The light assemblies shall be secured inside the storage container for the test. The test shall be conducted in accordance with Method 514, category 3 (loose cargo transport), with a test duration of 3 hours as specified in MIL-STD-810. Upon completion of the vibration test remove the light assemblies, hook up the lights in series and operate for 10 minutes. Failure to conform to the requirements of 3.5.4 shall constitute a test failure.

4.5.14 Static loading test. The sample light set shall be tested for resistance to loading expected when transported or stored in the field. The sample light set (container closed and latched) shall be subjected to an evenly distributed static loading of 1000 pounds for type I and 500 pounds for type II for a minimum of 1 hour at a temperature of 75°F minimum. Failure to conform to the requirements of 3.5.5 shall constitute a test failure.

4.5.15 Noise test. Each light assembly from the sample light set shall be tested for noise by operating the unit at the specified voltage and input current and at 50 and 60 Hz. Using a suitably calibrated instrument, the noise at 1 foot from the light assembly, in the area of the ballast, shall be recorded in at least three perpendicular planes around the circumference of the light assembly. Failure to conform to the requirements of 3.5.6 shall constitute a test failure.

4.5.16 Interchangeability test. For the first article inspection, the light set shall be tested for interchangeability by selecting two light assemblies from the light set and interchanging like part numbered components that would be considered repair or replaceable parts. After interchanging the parts, the light assemblies shall be operated at the rated voltage, amperage, and either 60 Hz or 50 Hz. Any inability to interchange, (see 3.6) or for the light assemblies to properly operate, shall constitute a test failure.

5. PACKAGING

5.1 Preservation. Preservation shall be level A.

5.1.1 Level A preservation. Each complete light assembly shall be placed within the storage container and the container closed and secured by means provided. Each light storage container shall then be unit packed in a snug fitting fiberboard box conforming to end opening style FOL, GRADE V3c of PPP-B-636. Inside dimensions of the box shall be approximately 75-1/2 inches in length, 21-1/2 inches in width and 7 inches in depth for the type I light set, and 75-1/2 inches in length, 12-1/2 inches in width, and 7-1/2 inches in depth for the type II light set. Each fiberboard box shall be closed as specified in the appendix of PPP-B-636.

5.2 Packing. Packing shall be level A or B as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

5.2.1 Level A packing. Eight type I or sixteen type II light sets preserved as specified in 5.1, shall be packed in a cleated-plywood shipping container conforming to overseas type, style A or B, type 1 load of PPP-B-601. Each container shall be provided with skids fabricated as specified in the shipping container specification. Each shipping container shall be closed and reinforced with strapping as specified in the appendix of PPP-B-601.

5.2.2 Level B packing. Eight type I or 16 type II light sets preserved as specified in 5.1, shall be packed in a cleated-plywood shipping container conforming to domestic type, style A or B, type I load of PPP-B-601. Each container shall be provided with skids fabricated as specified in the container specification. Each shipping container shall be closed and reinforced with strapping as specified in the appendix of PPP-B-601.

5.3 Marking. In addition to any marking required by the contract or purchase order, unit packs and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The light set is designed to provide high intensity lighting, flexibility of usage, lightweight, rugged construction and provision for ease of lamp replacement. The light set shall consist of four fluorescent light assemblies or two fluorescent light assemblies.

6.2 Acquisition requirements. Acquisition documents must specify the following:


a. Title, number, and date of this specification.
b. Type of light set required (see 1.2).
c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
d. When a first article is specified (see 3.1, 4.3 and 6.3).
e. Levels of packing (see 5.2).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to furnish. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.4 Filter. A blue filter shall be included with the type II light set for SICPS to provide better light reduction.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

6.5 Part or identification number (PIN). The PIN's to be used for light sets acquired by this specification are created as follows:

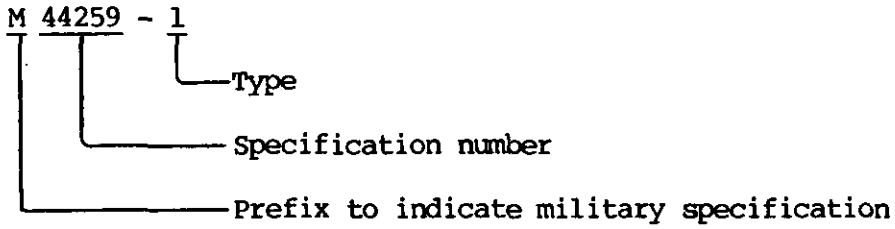

6.6 Subject term (key word) list.

Containers, storage, light
Extendable
Lamps
SICPS
TEMPER

6.7 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodian:

Army - GL

Preparing activity:

Army - GL

(Project 6230-1013)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

Commander
US Army Natick RD&E Center
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick RD&E Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-L-0044259B (GL)	LIGHT SET, PORTABLE, FLUORESCENT

3a. NAME OF SUBMITTING ORGANIZATION

b. ADDRESS *(Street, City, State, ZIP Code)*

4. TYPE OF ORGANIZATION *(Mark one)*

- ☐ VENDOR
- ☐ USER
- ☐ MANUFACTURER
- ☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil/ - Downloaded: 2026-10-22T01:02Z
Check the source to verify that this is the current version before use.