A-A-2474
August 15, 1988

COMMERCIAL ITEM DESCRIPTION


BAR, WRECKING (NONSPARKING AND NONMAGNETIC)

The General Services Administration has authorized the use of this commercial item description.

This commercial item description covers one size wrecking bar assigned National Stock Number (NSN) 5120-00-180-0872 made of a nonferrous alloy having a low sparking hazard and a low magnetic permeability.

Salient characteristics.

Design and dimensions. The wrecking bar shall be of the following design and dimensions:

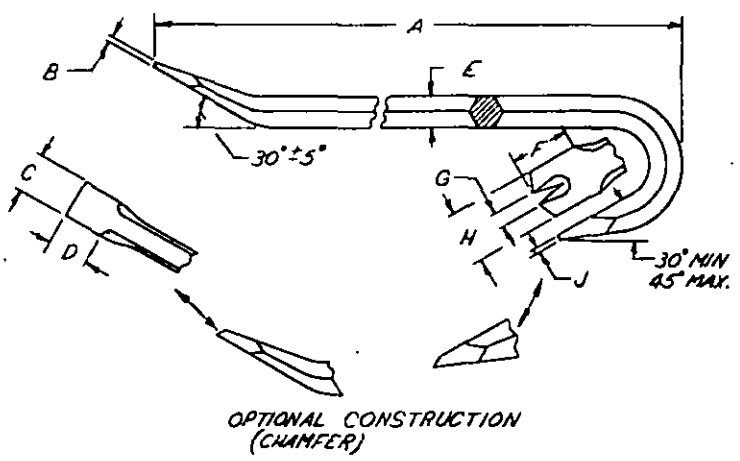

A - 36 inches, plus 1 inch, minus 1/2 inch.
B - 1/16 inch, plus or minus 1/32 inch.
C - 1-1/8 inches, plus or minus 3/16 inch.
D - 1-3/8 inches, plus or minus 1/8 inch.
E - 1-3/16 inches, plus or minus 1/8 inch.
F - 1-1/16 inches, minimum.
G - 1/2 inch, plus or minus 1/8 inch.
H - 1-3/16 inches, minimum.
J - 1/16 inch, plus or minus 1/32 inch.

Material. Material shall be a beryllium copper or aluminum bronze alloy having an iron content not over five percent, and when present, it shall be well diffused throughout the alloy. When tested with a magnetic permeability indicator conforming to Military Specification MIL-I-17214, the magnetic permeability shall not be above 1.2 on the indicator scale.

Hardness. The bars shall have a minimum hardness of Rockwell C16, or equivalent for a minimum distance of 2-3/4 inches from each end.

FSC 5120

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.

Bending test. The bar shall be capable of withstanding, without noticable distortion, a load of 150 pounds, 32 inches from the end when not more than 1-1/2 inches of the end is rigidly secured by means of a vise or clamp.

Workmanship. The bar shall be smoothly finished and free from burrs and rough edges or other imperfections which may impair the appearance, serviceability, or durability

Marking. Each bar shall be marked in a plain and permanent manner with the manufacturer's name, or with a trademark of such known character that the source of manufacture may be readily determined, the country of origin, and the name, abbreviation, or chemical symbol of each alloy used.

Quality assurance provisions. Sampling for inspection shall be in accordance with MIL-STD-105, Sampling Procedures and Tables for Inspection by Attributes, except where otherwise indicated herein. The lot size shall consist of all bars offered for acceptance at one time. A sample unit shall be one bar.

A. Examination for design, dimensions and workmanship. The inspection level shall be S-2 with an acceptable quality level (AQL) of 4.0 percent defective.

B. Material. Material shall be ascertained by manufacturer's certification.

C. Bending and hardness tests. Bending and hardness testing shall be in conformance with commercially accepted procedures. The inspection level shall be S-2 with an AQL of 4.0 percent defective.

Regulatory requirement. In accordance with the section 23.403 of the Federal Acquisition Regulations, the Government's policy is to acquire items composed of the highest percentage of recovered materials practicable, consistent with maintaining a satisfactory level of competition without adversely affecting performance requirements or exposing suppliers' employees to undue hazards from the recovered materials.

Packaging, packing, labeling and marking. Packaging, packing, labeling and marking shall be as specified in the contract or order.

Notes:

The issue of referenced documents in effect on the date of invitation for bid or request for proposals shall be used to determine compliance with the stated requirements. Sources for obtaining referenced documents may be determined by contacting the Contracting Officer.

MILITARY INTERESTS:

NONE: DOD has determined that no military activity has an official interest in this commercial item description.

PREPARING ACTIVITY:

GSA-FSS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T08:23Z
Check the source to verify that this is the current version before use.