MIL-STD-24A
17 November 1955
Superseding
MIL-STD-24
9 March 1951

MILITARY STANDARD

REVISION OF DRAWINGS

UNITED STATES
GOVERNMENT PRINTING OFFICE
WASHINGTON : 1956

For sale by the Superintendent of Documents, U. S. Government Printing Office
Washington 25, D. C. - Price 10 cents

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:51Z
Check the source to verify that this is the current version before use.

OFFICE OF THE ASSISTANT SECRETARY OF DEFENSE
WASHINGTON 25, D. C.

17 NOVEMBER 1955

Supply and Logistics
Revision of Drawings

MIL-STD-24A

1. This standard has been approved by the Department of Defense for use by the Departments of the Army, the Navy, and the Air Force.

2. In accordance with established procedure the Standardization Division has designated the Ordnance Corps, the Bureau of Ordnance and the Air Force, respectively, as Army-Navy-Air Force custodians of this standard.

3. This standard is mandatory for use effective 1 March 1956 by the Departments of the Army, the Navy, and the Air Force.

4. Recommended corrections, additions, or deletions should be addressed to the Standardization Division, Office of the Assistant Secretary of Defense (Supply and Logistics), Washington 25, D. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:51Z
Check the source to verify that this is the current version before use.

CONTENTS

1 REVISION OF DRAWINGS.
1.1 General.
1.1.1 Scope.
1.2 Definitions.
1.2.1 Revision.
1.2.2 Revision symbol.
1.3 Methods for revising drawings.
1.3.1 Methods.
1.3.2 Changes in dimensions.
1.4 Identifying revisions on drawings.
1.4.1 Use.
1.4.2 Location.
1.4.3 Revision letters.
1.4.4 Multiple changes.
1.5 Recording revisions on drawings.
1.5.1 Revision blocks.

Figure

1. Example of recording revision on production drawing.
2. Example of recording revision on construction drawing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:51Z
Check the source to verify that this is the current version before use.

1. REVISION OF DRAWINGS

1.1 GENERAL

1.1.1 Scope. This standard covers the methods for revising production and construction drawings and for identifying and recording revisions on the drawings.

1.2 DEFINITIONS

1.2.1 Revision. The term "revision" as used herein refers to any change on the drawing after the drawing has been issued.

1.2.2 Revision symbol. A revision symbol is an identifying letter, and suffix number, inclosed in a circle approximately ⅜ inch in diameter.

1.3 METHODS FOR REVISING DRAWINGS

1.3.1 Methods. Revisions shall be made by erasure, crossing out, addition of new or revised information, or by redrawing.

1.3.2 Changes in dimensions. In general, any change in a dimension of a part should also be made to scale on the affected portion of the delineation; however, it is permissible to leave the delineation unchanged when the new proportion of the part is not noticeably different from the original one. In cases where change to scale is not made, the practice outlined in Military Standard MIL-STD-1 under "Dimensions Not to Scale" shall be followed.

1.4 IDENTIFYING REVISIONS ON DRAWINGS

1.4.1 Use. Revision symbols shall be used to indicate the location of the revision in the field of the drawing except in the following cases: On zoned drawings, tabular drawings, and similar drawings where a change can be located readily and accurately, the symbol need not be shown on the drawing provided sufficient information is included in the drawing revision block or on a revision notice to locate the revision. Where there are many changes in one area on a drawing so that separate revision symbols would crowd the drawing, a single revision symbol may be used to identify the changes if sufficient data is included in the drawing revision block, or on a revision notice to locate, identify, and describe the changes.

1.4.2 Location. Revision symbols shall be located as near as possible to the notes, lines, views, or dimensions which are changed so as to keep the number of symbols to a minimum. Revision symbols should not be placed on the views of a drawing unless it is impracticable to do otherwise. Leader lines may be used in connection with revision symbols when necessary. However, the use of leader lines should be limited, their length shall be kept to a minimum, and they shall be placed so as to avoid crossing dimension lines whenever possible.

1.4.3 Revision letters. Upper case letters shall be used in revision symbols and shall follow in alphabetical sequence except that the use of letters "I", "O", "Q", and "X" should be avoided. When revisions are numerous enough to exhaust the alphabet, the revision following the letter "Z" shall be lettered "AA", the next "AB", then "AC", etc. Should letters "AA" to "AZ" be exhausted, the next sequence shall be "BA", "BB", etc.

1.4.4 Multiple changes. All changes to a drawing incorporated at one time shall be identified by the same revision letter. Where the same revision letter is used to identify one or more changes, the changes shall be numbered serially in accordance with the number of changes made (except as stated in paragraph 1.4.1). The suffix number shall appear in the revision symbol.

1.5 RECORDING REVISIONS ON DRAWINGS

1.5.1 Revision blocks. Each revision shall be recorded in the revision block of the drawing in accordance with figures 1 and 2 and the requirements of the following subparagraphs.

1.5.1.1 The identifying letter pertaining to the particular revision being recorded shall be entered in the letter column.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:51Z
Check the source to verify that this is the current version before use.

1.5.1.2 A brief description of the change made shall be entered in the description column, or a reference shall be made in this column to a revision notice describing the change. The appropriate suffix number or group of suffix numbers shall precede each description in the description column. Where the symbol is not used to identify the location of a change, information shall be included in this column or the zone column locating each change.

1.5.1.3 Authentication of the revision shall be made in the approval column.

1.5.1.4 Where a drawing is zoned, zones in which changes are made shall be entered in the zone column. See military standards MIL–STD–3 and MIL–STD–4.

1.5.1.5 Additional columns may be provided in the revision block as desired for other information if the arrangement of the columns required by this standard is not changed.

Copies of this Military Standard may be obtained by directing requests as follows:

For Department of the Army Agencies, to Chief of the specific agency or as directed by that agency.

For Department of the Army contractors, to the Contracting Officer.

For Department of the Navy activities, to the Commanding Officer, Naval Supply Center, Norfolk 11, Va.

For Department of the Navy contractors, to the Bureau of Supplies Accounts, Washington 25, D. C.

For the Marine Corps, to the Quartermaster General, Headquarters, U. S. Marine Corps, Washington 25, D. C.

For Department of the Air Force activities and Air Force contractors, to the Commanding General, Air Materiel Command, Wright-Patterson Air Force Base, Dayton, Ohio.

Copies of this Military Standard may be obtained for other than official use by individuals, firms, and contractors from the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

Both the title and the identifying symbol number should be stipulated when requesting copies of Military Standards.

Custodian:

Army—Ordnance Corps
Navy—Bureau of Ordnance
Air Force

Other interests:

Army—CEMSQT
Navy—AMCMSYCG.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:51Z
Check the source to verify that this is the current version before use.

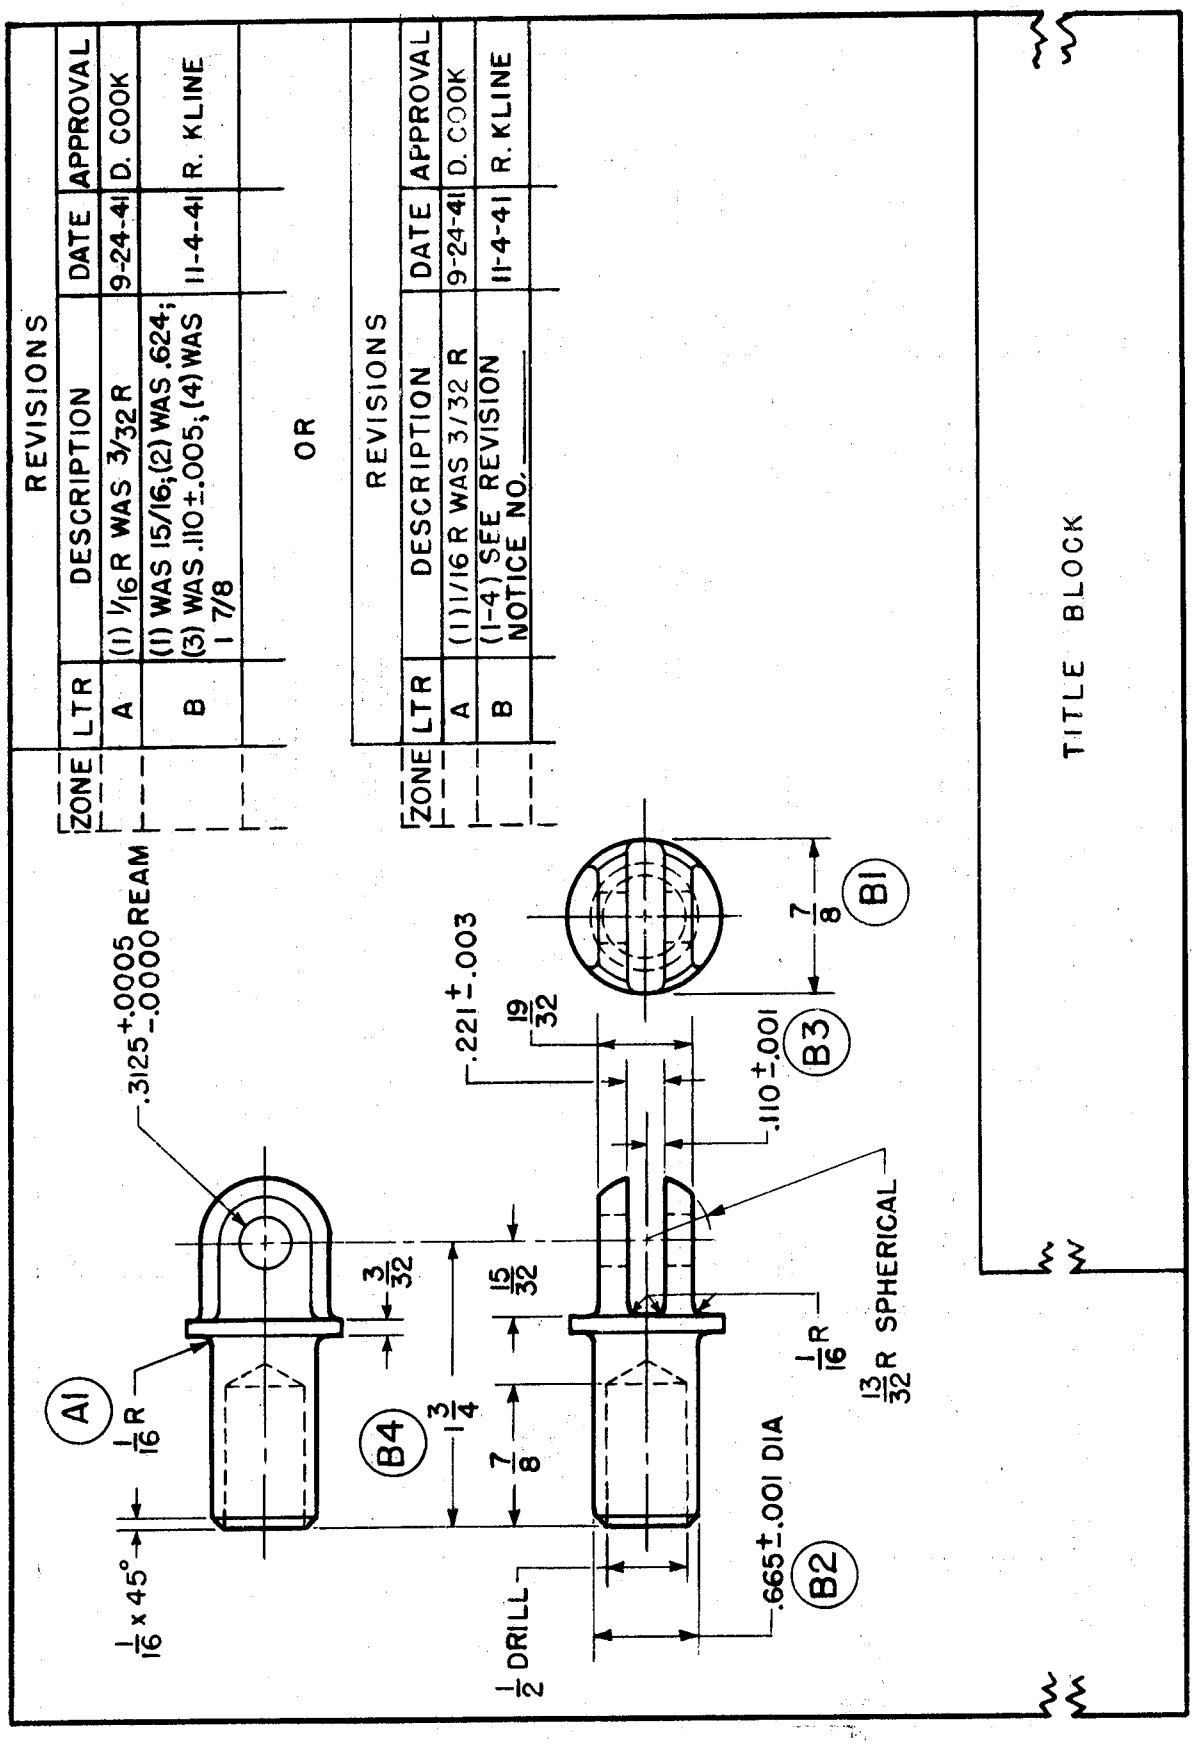


FIGURE 1.—*Example of recording revision on production drawing*

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:51Z
Check the source to verify that this is the current version before use.

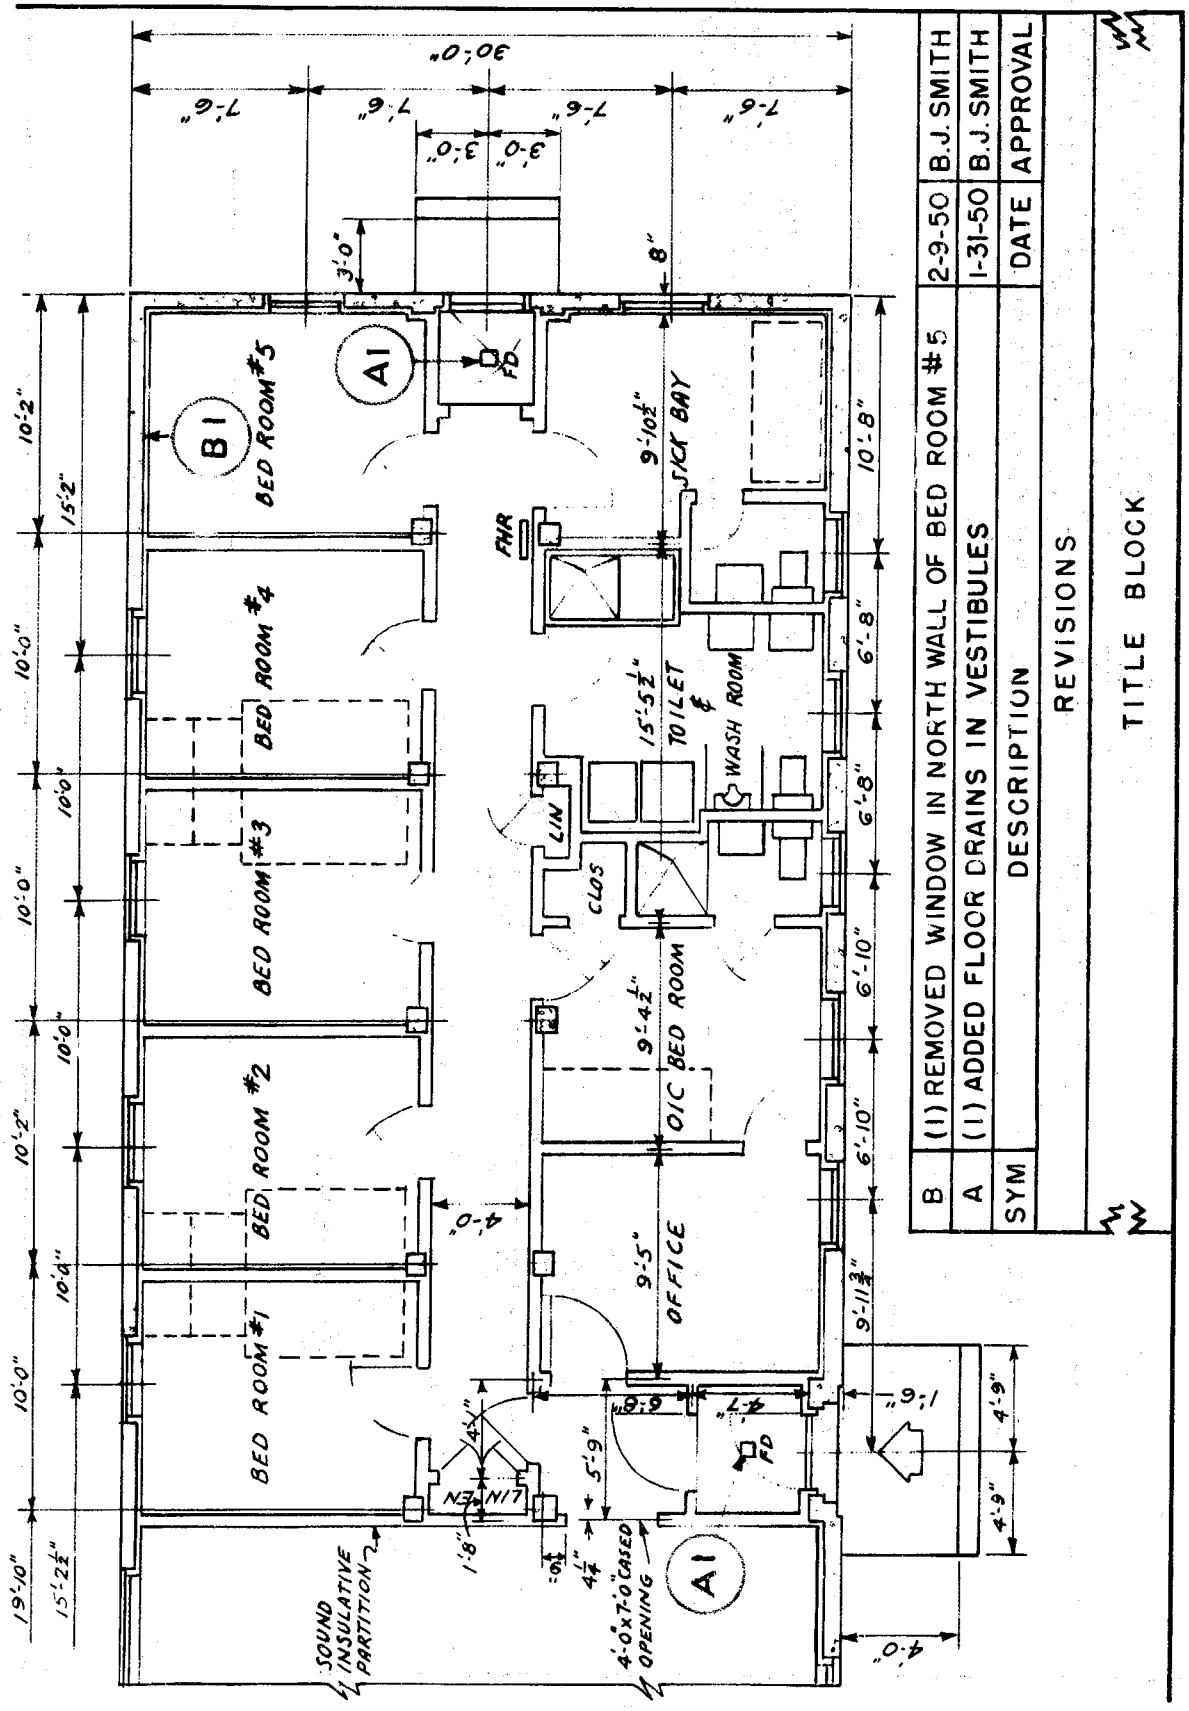


FIGURE 2.—*Example of recording revision on construction drawing.*

Source: https://assist.dla.mil -- Downloaded: 20260-23T20:51Z
Check the source to verify that this is the current version before use.