
FRONT FACE OF PIN INSERT SHOWN
(SOCKET INSERT OPPOSITE), UNLESS
OTHERWISE SPECIFIED

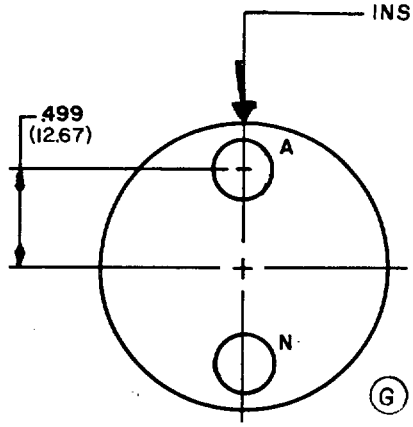


SERVICE D

28 VOLT DC TWO WIRE
-02 AND -03 INSERT ARRANGEMENTS

QTY	CONTACT	SIZE	SOCKET M39029	PIN M39029
1	A	1/0	49-333	48-323
1	N	1/ON	49-333 SEE NOTE 9	48-324

-02-CABLE ICEA 2-NO 2 CONDUCTOR
ROUND TYPE W 0-600 Volts
-03-CABLE-CO-02 HDF (2/1) 1385 PER
MIL-C-3432
MARK 44-02 ON 44-03 INSERT (SEE NOTE 8)

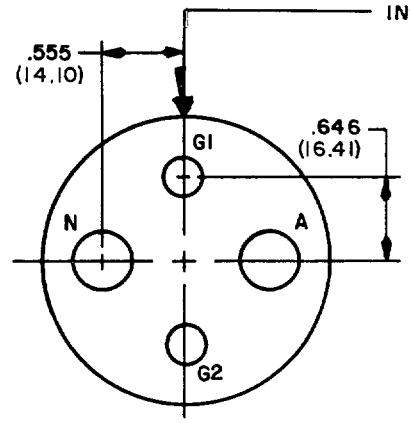

SERVICE D

AC SINGLE PHASE TWO WIRE GROUNDING
-04 AND -05 INSERT ARRANGEMENTS

QTY	CONTACT	SIZE	SOCKET M39029	PIN M39029
1	A	1/0	49-333	48-323
1	N	1/ON	49-333 SEE NOTE 9	48-324
2	G1,G2	4G	49-332	48-322

-04-CABLE ICEA 2-NO 2 CONDUCTOR
ROUND TYPE G 0-600 Volts
-05-CABLE-CO-02 HDF (2/1-2/5R) 1385 PER
MIL-C-3432
MARK 44-04 ON 44-05 INSERT (SEE NOTE 8)

(G) denotes changes

APPROVED 2 Feb 1972
REVISED (G) 20 December 1982

User activities: Army - AT,AV,ME
Navy - MC,CG,OS, SH
Air Force - 19

Review activities: Army - CR, MI
Navy - AS, YD
Air Force - 17, 80
DLA -ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY - EC Other Cust ARMY - CR AF - 85	International interest	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 44, CLASS L, 100 AMPS	MILITARY STANDARD MS14055
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 1 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

AC SINGLE PHASE THREE WIRE GROUNDING
-06 INSERT ARRANGEMENT

QTY	CONTACT	SIZE	SOCKET M39029	PIN M39029
2	A,B	1/0	49-333	48-323
1	N	1/0N	49-333 SEE NOTE 9	48-324
3	G1,G2,G3	6G	49-330	48-319

INSERT ROTATION (DEGREES FROM NORMAL)				
ARRANGEMENT NUMBER	NORMAL (SEE FIG. 1) DC or 60 Hz	ALTERNATE (SEE FIG 1) 400 Hz		
		Z	X	Y
44-02, 44-03	0°	---	---	---
44-04, 44-05	0°	45°	---	---
44-06	0°	---	---	---
44-06	0°	---	---	---
44-12, 44-13	0°	60°	---	---
44-50, 44-51	0°	---	---	---
44-52, 44-56	0°	---	---	---

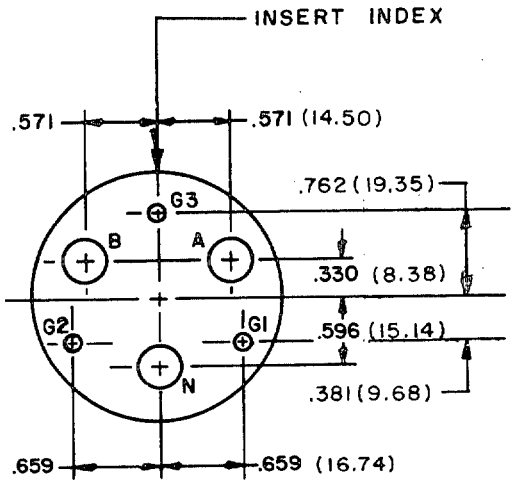

SERVICE D

-06 ICEA 3-NO 2 CONDUCTOR
CABLE ROUND TYPE G 0-600 Volts

FRONT FACE OF PIN INSERT SHOWN
(SOCKET INSERT OPPOSITE), UNLESS
OTHERWISE SPECIFIED.

APPROVED 2 Feb 1972 REVISED (E) For changes see pages 1 and 2 (G) FOR CHANGES SEE PAGES 1,2,3,&4

User activities: Army - AT,AV,ME Navy - MC,CG,OS, SH Air Force -19

Review activities: Army - CR, MI Navy - AS, YD Air Force - 17, 80 DLA -ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.


P.A NAVY - EC Other Cust ARMY - CR AF - 85	International interest	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 44, CLASS L, 100 AMPS	MILITARY STANDARD MS14055
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 2 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE 5935-3333-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
5935

INSERT IN NORMAL POSITION
(60 Hz POWER ONLY)

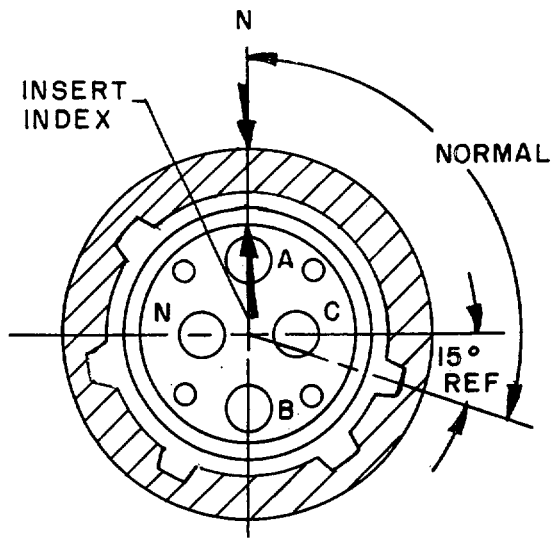


(REF. MS90555******S)
(REF. MS90557******S)
SOCKET CONTACT PATTERN
FRONT FACE OF SOCKET INSERT SHOWN

INSERT IN ALTERNATE POSITION
(400 Hz POWER ONLY)

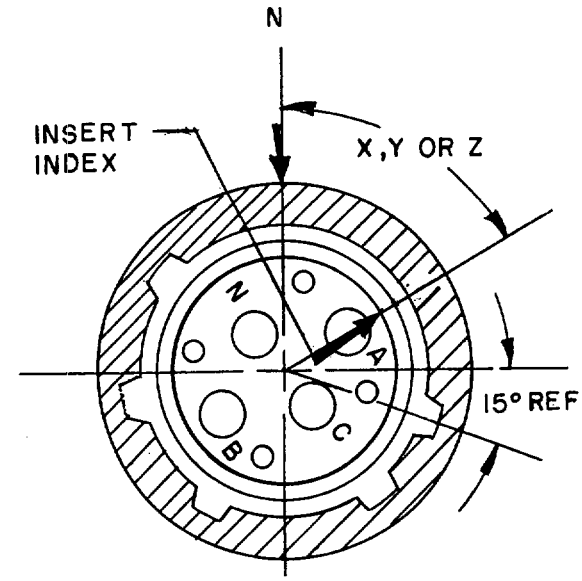


(REF. MS90555******SZ)
(REF. MS90557******SZ)
SOCKET CONTACT PATTERN
FRONT FACE OF SOCKET INSERT SHOWN

INSERT IN NORMAL POSITION
(60 Hz POWER ONLY)

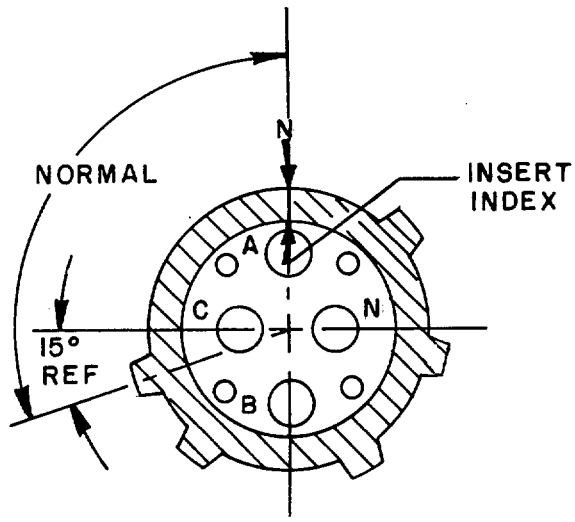

(REF. MS90556******P)
(REF. MS90558******P)
SOCKET CONTACT PATTERN
FRONT FACE OF PIN INSERT SHOWN

INSERT IN ALTERNATE POSITION
(400 Hz POWER ONLY)

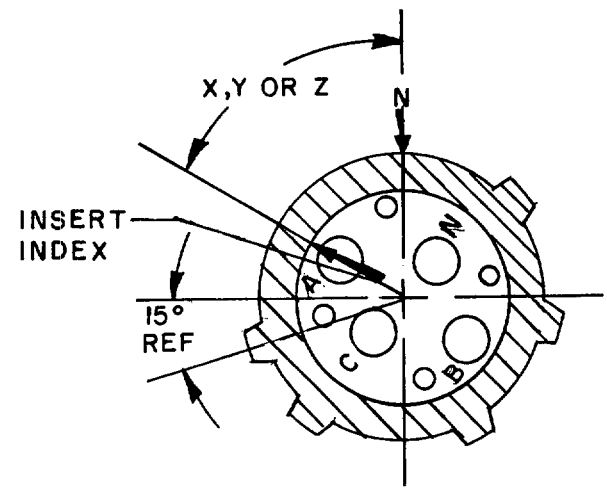

(REF. MS90556******PZ)
(REF. MS90558******PZ)
SOCKET CONTACT PATTERN
FRONT FACE OF PIN INSERT SHOWN

Ⓖ FIGURE 1.

APPROVED 2 FEB 1972 REVISED Ⓖ FOR CHANGES SEE PAGES 1,2,3, & 4

User activities: Army - AT, AV, ME
Navy - MC, CG, OS, SH
Air Force - 19

Review activities: Army - CR, MI
Navy - AS, YD
Air Force - 17, 80
DLA-ES


This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY - EC Other Cust ARMY - CR AF - 85	International interest	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 44, CLASS L, 100 AMPS	MILITARY STANDARD MS14055
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 3 OF 5

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5935-3333-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

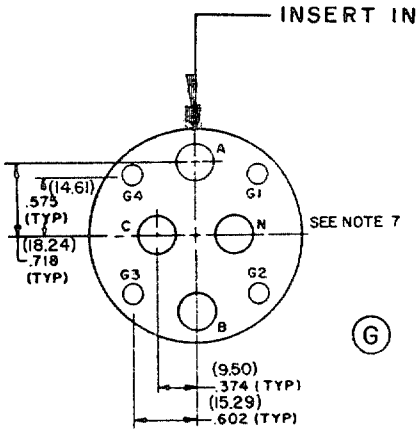

SERVICE D


AC THREE PHASE FOUR WIRE GROUNDING
-12 AND -13 INSERT ARRANGEMENTS

QTY	CONTACT	SIZE	SOCKET M39029	PIN M39029
3	A,B,C	1/0	49-333	48-323
1	N	1/ON	49-333 SEE NOTE 9	48-324
4	G1,G2,G3,G4	6G	49-330	48-319

Ⓖ

-12-CABLE ICEA 4-NO 2 CONDUCTOR
ROUND TYPE G 0-600 Volts
-13-CABLE-CO-04 HDF (4/1-4/8R) 1620
PER MIL-C-3432
MARK 44-12 ON 44-13 INSERT (SEE NOTE 8)

FRONT FACE OF PIN INSERT SHOWN
(SOCKET INSERT OPPOSITE), UNLESS
OTHERWISE SPECIFIED.

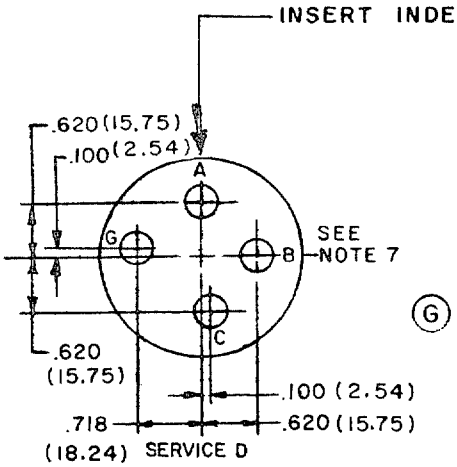

SERVICE D

AC THREE PHASE THREE WIRE GROUNDING
-50, -51, -52 and -56 INSERT ARRANGEMENTS
FOR NAVY GROUND SUPPORT EQUIPMENT USE ONLY
(SEE NOTE 10)

QTY	CONTACT	SIZE	SOCKET M39029	PIN M39029
3	A,B,C	1/0	49-333	48-323
1	G	1/ON	49-333 SEE NOTE 9	48-324

Ⓖ

-50 -FOUR EACH NO. 1 WIRE (RECEPTACLES ONLY)
-51-CABLE ICEA 4-NO. 1 CONDUCTOR ROUND TYPE W 0-600 Volts 1.68 inch O.D.
-52-CABLE ICEA 4-NO. 2 CONDUCTOR ROUND TYPE W 0-600 Volts 1.48 inch O.D.
-56-CABLE ICEA 4-NO. 6 CONDUCTOR ROUND TYPE W 0-600 Volts 1.10 inch O.D.

MARK 44-50 ON 44-51, 44-52 and 44-56 INSERT (SEE NOTE 8)

APPROVED 2 Feb 1972
REVISED Ⓖ
For changes see pages 1,2,3 & 4

User activities: Army - AT, AV, ME
Navy - MC, CG, OS, SH
Air Force - 19

Review activities: Army - CR, MI
Navy - AS, YD
Air Force - 17, 80
DLA-ES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY - EC Other Cust ARMY - CR AF - 85	International interest	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 44, CLASS L, 100 AMPS	MILITARY STANDARD MS14055
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 4 OF 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
3. Metric equivalents are in parentheses.
4. Unless otherwise specified, tolerance is ±.002 (.05 mm).
5. For design feature purposes, this standard takes precedence over procurement documents referenced herein.
6. Referenced documents shall be of the issue in effect on date of invitation for bid.
7. Unless otherwise specified, pin insert pattern shown. Socket inserts are the reverse.
8. Trademark and 44-( ) shall appear in available space. Contact identifying letter shall be located so as to identify relative contact.
9. Only the pin contact is lengthened and has the N (neutral) designation. The mating socket contact is the same as the power contact.
10. The contact position labeled (G) in the insert arrangement contains the 1/0N (neutral) size pin contact that is connected to the shell to form a grounding pin contact.

REQUIREMENTS:
1. Neutral pin (N) is not connected to shell.
2. Grounding pin (G) is connected to shell.
3. Applicable MS3348 crimp bushings shall be supplied with the contacts for insert arrangements as specified:

INSERT ARRANGEMENT	CONTACTS		CABLE CONDUCTORS MS90556 & MS90557		CONTACT BUSHINGS REQUIRED	
	QTY	SIZE	QTY	SIZE	QTY	P/N MS3348-
44-02	2	1/0	2	2	2	1-2L
44-04	2 2	1/0 4	2 2	2 6(G)	2 2	1-2L 4-6L
44-05	2 2	1/0 4	2 2	1 5(G)	- 2	- 4-5L
44-06	3 3	1/0 6	3 3	2 8(G)	3 3	1-2L 6-8L
44-12	4 4	1/0 6	4 4	2 9(G)	4 4	1-2L 6-9L
44-13	4 4	1/0 6	4 4	1 8(G)	- 4	- 6-8L
44-52	4	1/0	4	2	4	1-2L
44-56	4	1/0	4	6	4	1-6L

User activities: Army - AT, AV, ME
Navy - MC, CG, OS, SH
Air Force - 19

Review activities: Army - CR, MI
Navy - AS, YD
Air Force - 17, 80
DLA-ES

APPROVED 2 Feb 1972
REVISED (G) For changes see pages 1,2,3 & 4

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

P.A NAVY - EC Other Cust ARMY - CR AF - 85	International interest	TITLE INSERT ARRANGEMENTS, ELECTRICAL CONNECTOR, SIZE 44, CLASS L, 100 AMPS	MILITARY STANDARD MS 14055
Procurement Specification MIL-C-22992		SUPERSEDES:	PAGE 5 OF 5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:33Z
Check the source to verify that this is the current version before use.

* U.S. GOVERNMENT PRINTING OFFICE: 1983 — 605-034/14119