INCH-POUND

MS16213D
16 NOVEMBER 2021
SUPERSEDING
MS16213C
13 DECEMBER 1993

DETAIL SPECIFICATION SHEET

WASHER, LOCK, FLAT, EXTERNAL TOOTH, NONMAGNETIC

Inactive for new design after 3 February 2000
and is no longer used, except for replacement purposes.

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Comments, suggestions, or questions on this document should be addressed to DLA Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616 or emailed to STDZNMGT@dla.mil. Since contact information can change, you may want to verify the currency of this address information using the ASSIST Online database at https://assist.dla.mil.

AMSC N/A FSC 5310

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

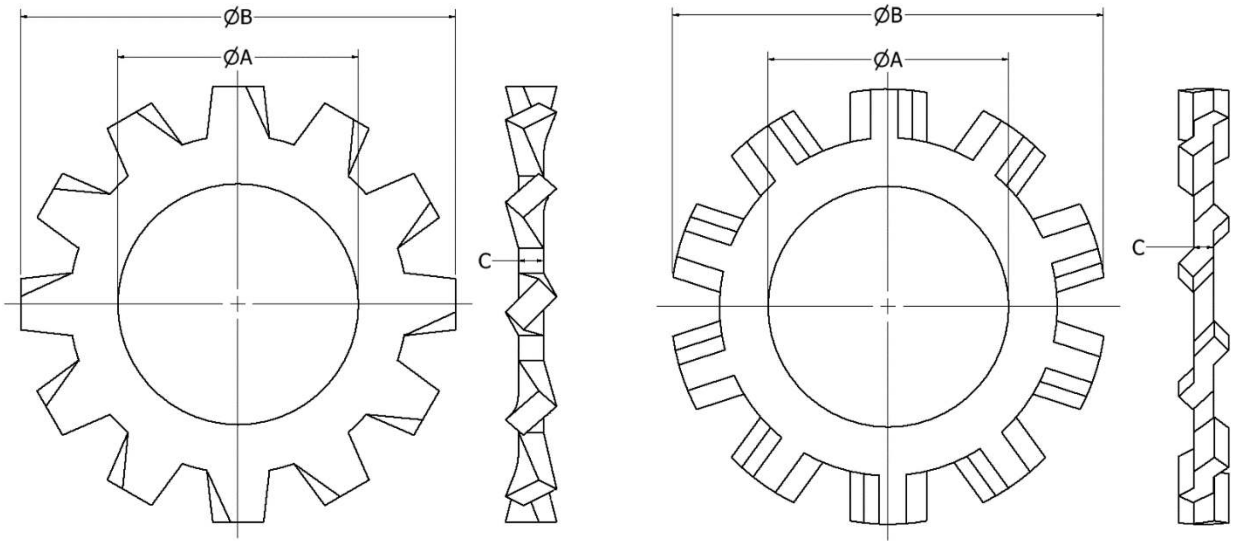


FIGURE 1. Acceptable Designs

TABLE I. Washer Dimensions

Nominal Size		Inside Diameter øA		Outside Diameter øB		Thickness C		Corrosion resistant steel (CRES) Passivated
		Max.	Min.	Max.	Min.	Max.	Min.	MS Dash No.
#4	0.112	.123	.115	.290	.275	.019	.015	57
#6	0.138	.150	.141	.320	.305	.022	.018	58
#8	0.164	.176	.168	.381	.365	.023	.018	59
#10	0.190	.204	.195	.410	.395	.025	.020	60
	0.25	.267	.256	.510	.494	.028	.023	61
	0.3125	.332	.320	.610	.588	.034	.028	62
	0.375	.398	.384	.694	.670	.040	.032	63
	0.4375	.464	.448	.760	.740	.040	.032	64
	0.5	.530	.513	.900	.880	.045	.037	65
	0.625	.663	.641	1.070	1.045	.050	.042	67
	0.75	.795	.768	1.260	1.220	.055	.047	68
	0.875	.927	.897	1.410	1.380	.060	.052	69
	1	1.060	1.025	1.620	1.59	.067	.059	70

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

Requirements:

1. MATERIAL: Material shall be austenitic corrosion resistant steel in accordance with UNS numbers S30200, S30400, S31000, S31600, S32100 and S34700.

2. FINISH: Corrosion resistant steel washers shall be passivated in accordance with AMS2700 Method 1.

3. MAGNETIC PERMEABILITY: Magnetic permeability shall be 2.0 maximum at 100/200 oersteds using magnetic indicator in accordance with ASTM A342/A342M.

4. PACKAGING: Packaging shall be in accordance with ASTM D3951.

5. PART NUMBER: The part number shall consist of the basic MS number plus the dash number.

   Example: MS16213-61

NOTES:

1. All dimensions are inches, unless otherwise specified.

2. The number of teeth shall be at the option of the manufacturer.

3. In the event of a conflict between the text of this standard and the references cited herein, the text of this standard shall take precedence.

4. Referenced government (or non-government) documents of the issue in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation from a part of this to the extent specified herein.

5. The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DODISS specified in the solicitation: ASME B18.21.1

Referenced Documents: This document references the following.

ASME B18.21.1
AMS2700
ASTM A342/A342M
ASTM D3951

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AR
Navy – AS
Air Force - 99
DLA – GS

Preparing Activity:
DLA – GS7

(Project 5310-2022-001)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:54Z
Check the source to verify that this is the current version before use.