INCH-POUND


MS21260J
22 FEBRUARY 1999
Superseding
MS21260H
15 August 1997

MILITARY SPECIFICATION SHEET

TERMINAL, WIRE ROPE, STUD

This specification is approved for use by all departments and agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation: MIL-DTL-781.

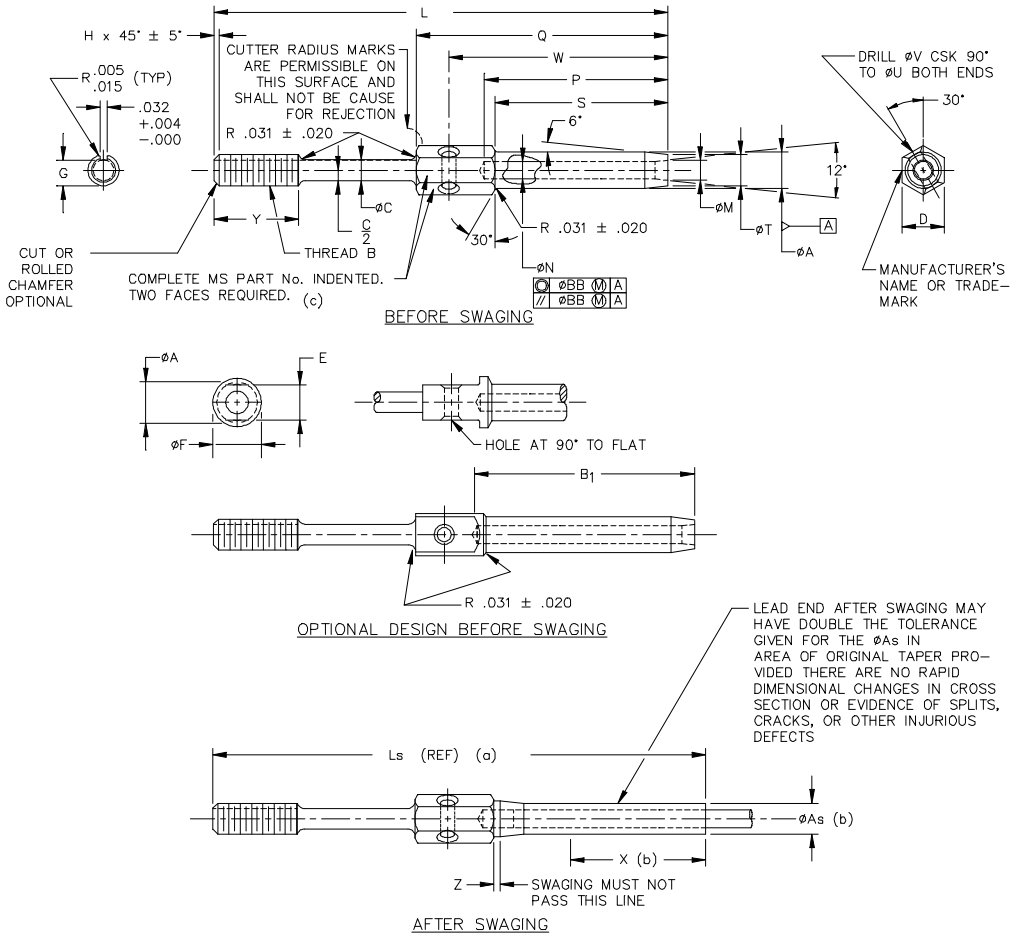

(a) Reference dimensions are for design purposes only and are not an inspection requirement.
(b) Swaged terminals shall conform to 'ØAs' for length X.
(c) For terminal sizes –2 thru –5 use basic part number only, example: MS21260.

(J) Denotes change(s)

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.

MS PART NUMBER		NOM. CABLE DIA. REF	MIN. BREAKING STRENGTH LB	THREAD B UN-3A UNF-3A	ØA		ØAs		B_1		ØC +.006 -.000	D	E +.000 -.010	ØF +.010 -.000	G		H	
CORROSION RESISTANT STEEL RH THREAD	LH THREAD														MAX	MIN	MAX	MIN
MS21260L2RH	MS21260L2LH	.062 (1/16)	480	.1380 (# 6)-40	.160		.138		1.042		.092	.188	.156	.188.	.1139	.1094	.031	
MS21260S2RH	MS21260S2LH																	
MS21260L3RH	MS21260L3LH	.093 (3/32)	920	.1900 (#10)-32	.218		.190		1.261		.133	.250	.187	.250	.1638	.1568		
MS21260S3RH	MS21260S3LH																	
MS21260L4RH	MS21260L4LH	.125 (1/8)	2000	.2500 (1/4)-28	.250		.219		1.511		.195	.313	.250	.313	.2224	.2152	.047	
MS21260S4RH	MS21260S4LH							+.000 -.005										.015
MS21260L5RH	MS21260L5LH	.156 (5/32)	2800		.297		.250		1.761									
MS21260S5RH	MS21260S5LH																	
MS21260L6RH	MS21260L6LH	.187 (3/16)	4200	.3125 (5/16)-24	.359	+.000 -.005	.313		2.011		.245	.375	.312	375	.2838	.2754		
MS21260S6RH	MS21260S6LH																	
MS21260-7RH	MS21260-7LH	.218 (7/32)	5600	.3750 (3/8)-24	.427		.375	+.000	2.261	±.063	.306	.438	.375	.438	.3454	.3378		
MS21260-8RH	MS21260-8LH	.250 (1/4)	7000		.494		.438	-.007	2.511			.500	.438	.500				
MS21260-9RH	MS21260-9LH	.281 (9/32)	8000	.4375 (7/16)-20	.563		.500		2.761		.361	.625	.563	.625	.4052	.4072		
MS21260-10RH	MS21260-10LH	.312 (5/16)	9800	.5000 (1/2)-20	.635		.563	+.000	3.011		.406	.688	.625	.688	.4678	.4597		
MS21260-12RH	MS21260-12LH	.375 (3/8)	14400	.5625 (9/16)-18	.703		.625	-.008	3.511		.476	.750	.688	.750	.5285	.5201		
MS21260-14RH	MS21260-14LH	.437 (7/16)	17600	.6250 (5/8)-18	.781		.688		4.011		.538	.812	.750	.812	.5909	.5826	.063	.031
MS21260-16RH	MS21260-16LH	.500 (1/2)	22800	.6250 (5/8)-18	.844		.750	+.000	4.698			.875	.812	.875				
MS21260-18RH	MS21260-18LH	.562 (9/16)	28500	.7500 (3/4)-16	.984		.875	-.009	5.011		.654	1.000	.875	1.000	.7137	.7050		
MS21260-20RH	MS21260-20LH	.625 (5/8)	35000	.8750 (7/8)-14	1.109		1.000	+.000 -.010	5.511		.768	1.125	1.000	1.125	.8558	.8266	.078	.048
MS21260-24RH	MS21260-24LH	.750 (3/4)	49600	1.0000 (1)-12	1.359		1.250	+.000	6.511		.893	1.438	1.125	1.438	.9608	.9516		
MS21260-28RH	MS21260-28LH	.875 (7/8)	66500	1.1250 (1 1/8)-12	1.593	+.000	1.437	-.012	7.166		1.002	1.625	1.438	1.625	1.0819	1.0772	.094	.062
MS21260-32RH	MS21260-32LH	1.000 (1)	85400	1.2500 (1 1/4)-12	1.812	-.010	1.625		8.229		1.128	1.875	1.625	1.812	1.2069	1.1972		

(J) (J) (J)

DASH NUM (SIZE)	L +/- .063	L_3 REF	ØM		ØN		P		Q +.031 -.016	S +.062 -.000	ØT		ØU REF	ØV ±.005	W ±.016	X MIN	Y ±.047 (b)	Z MIN	ØBB
L2	3.491	3.67	.090		.078		1.042		1.319	.969	.138		.094	.063	1.174	.70	.375		
S2	2.616	2.79																	
L3	3.738	3.86	.119		.109		1.261		1.581	1.188	.190				1.411	.80	.500		
S3	2.863	2.98										+.000							
L4	4.020	4.23	.154		.141		1.511		1.863	1.438	.219	-.005			1.682	1.05	.563		
S4	3.145	3.40		+.010		+.005		+.031											
L5	4.314	4.66	.188	-.000	.172	-.000	1.761	-.000	2.157	1.688	.250				1.958	1.29	.625		.008 (.016 FIM)
S5	3.439	3.78																	
L6	4.612	4.78	.223		.203		2.011		2.257	1.938	.313				2.237	1.31	.750	.03	
S6	3.737	3.90												.098					
-7	4.914	5.21	.257		.234		2.261		2.757	2.188	.375	+.000	.125		2.518	1.55	.875		
-8	5.218	5.52	.291		.265		2.511		3.061	2.438	.438	-.007			2.784	1.70			
-9	5.542	5.90	.326		.297		2.761		3.385	2.688	.500				3.076	1.89	1.000		
-10	5.875	6.30	.360		.328		3.011		3.718	2.938	.563	+.000			3.326	2.06			
-12	6.608	7.01	.430		.390	+.008	3.511		4.281	3.438	.625	-.008			3.828	3.12	1.125		
-14	7.468	7.94	.514		.468	-.000	4.011	+.047	4.812	3.938	.688				4.375	3.57	1.250		.010 (.020 FIM)
-16	8.718	9.28	.584	+.012	.531	+.009	4.698	-.000	5.562	4.625	.750	+.000			5.093	4.31			
-18	9.188	9.78	.653	-.000	.594	-.000	5.011		6.000	4.938	.875	-.009			5.468	4.51	1.500		
-20	10.469	11.16	.722		.656	+.010 -.000	5.511		6.750	5.438	1.000	+.000 -0.10	.188	.125	6.093	5.04	1.750		.015 (.030 FIM)
-24	12.188	12.76	.860	+.015	.781	+.012	6.511	+.062	7.938	6.438	1.250	+.000			7.188	5.80	2.000		
-28	12.851	13.61	1.013	-.000	.921	-.000	7.166	-.000	8.601	7.094	1.437	-.012			7.846	6.31			.020 (.040 FIM)
-32	14.624	15.53	1.151		1.046		8.229		9.844	8.156	1.625				9.000	7.26	2.250		

(a) To achieve the minimum breaking strength, for the terminal test only, a galvanized carbon steel wire rope shall be used.

(J) (b) Includes last full thread engagement.

Source: https://assist.dla.mil -- Downloaded: 20260-23T14:30Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

(J) 1. Material: In accordance with MIL-DTL-781.

2. Finish: In accordance with MIL-DTL-781.

3. Threads: Threads in accordance with FED-STD-H28/20.

4. Swage in accordance with specification MIL-T-6117.

5. Tolerance: Unless otherwise specified, tolerances: decimals ± .010, angles ± 3°.

NOTES:

1. Dimensions in inches,

2. Remove all burrs and sharp edges.

3. Interpret drawing in accordance with ASME Y14.5M.

4. In the event of a conflict between the text of this document and the references cited herein the text of this document takes precedence..

5. Unless otherwise specified, issues of reference documents are those in effect at the time of solicitation..

6. Interchangeability relationship: MS21260 parts can universally replace the canceled AN669 and NAS650 parts identified by the same dash number; but the canceled AN669 and NAS650 parts cannot replace the superseding MS21260 parts. MS21260 corrosion resistant steel parts can universally replace the canceled carbon and alloy steel parts identified by the same dash number.

(J) 7. Carbon and alloy steel parts are inactive for new design.

(J)

MILITARY INTEREST

Preparing Activity:
DLA- GS

Custodians:
Navy - AS
Army - AR
Air Force - 99

(PROJECT: 1560-0247)

Review activities:
Army – CR4
(J) Navy – MC
Air Force – 82
DLA - IS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:30Z
Check the source to verify that this is the current version before use.