FED SUP CLASS 4730

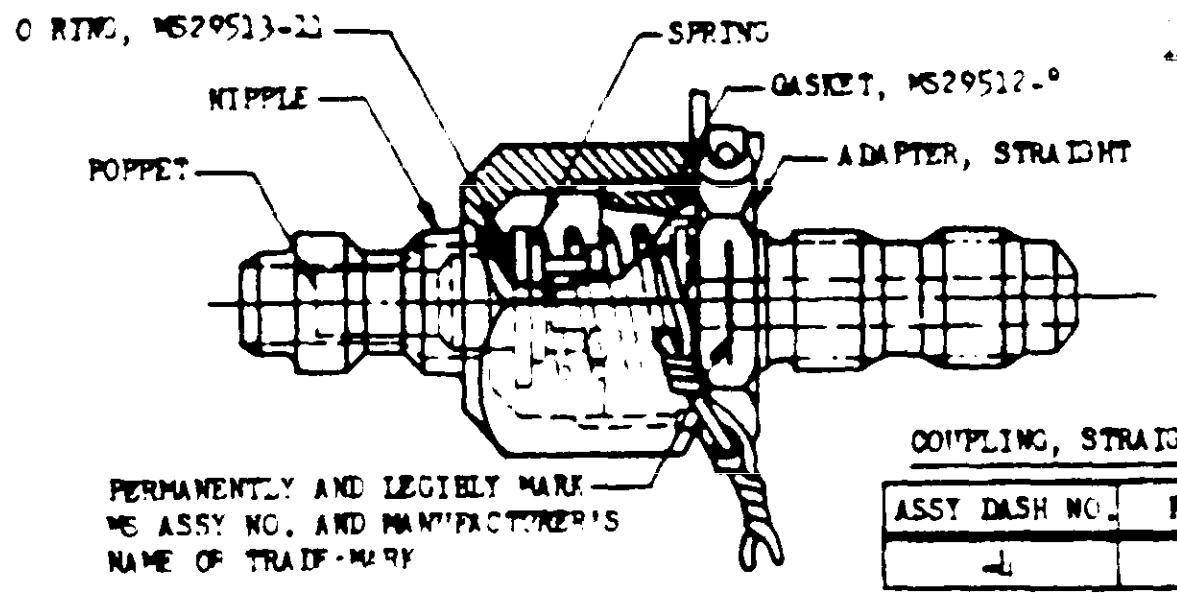
O RING, MS29513-11
SPRING
NIPPLE
GASKET, MS29512-8
POPPET
ADAPTER, STRAIGHT
PERMANENTLY AND LEGIBLY MARK MS ASSY NO. AND MANUFACTURER'S NAME OR TRADE-MARK

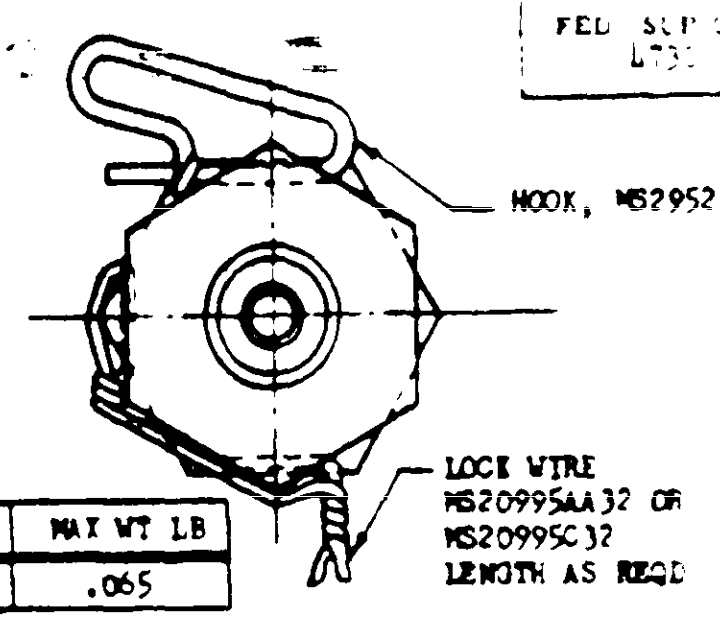

COUPLING, STRAIGHT

ASSY DASH NO.	FIIN	MAX WT LB
-4		.065

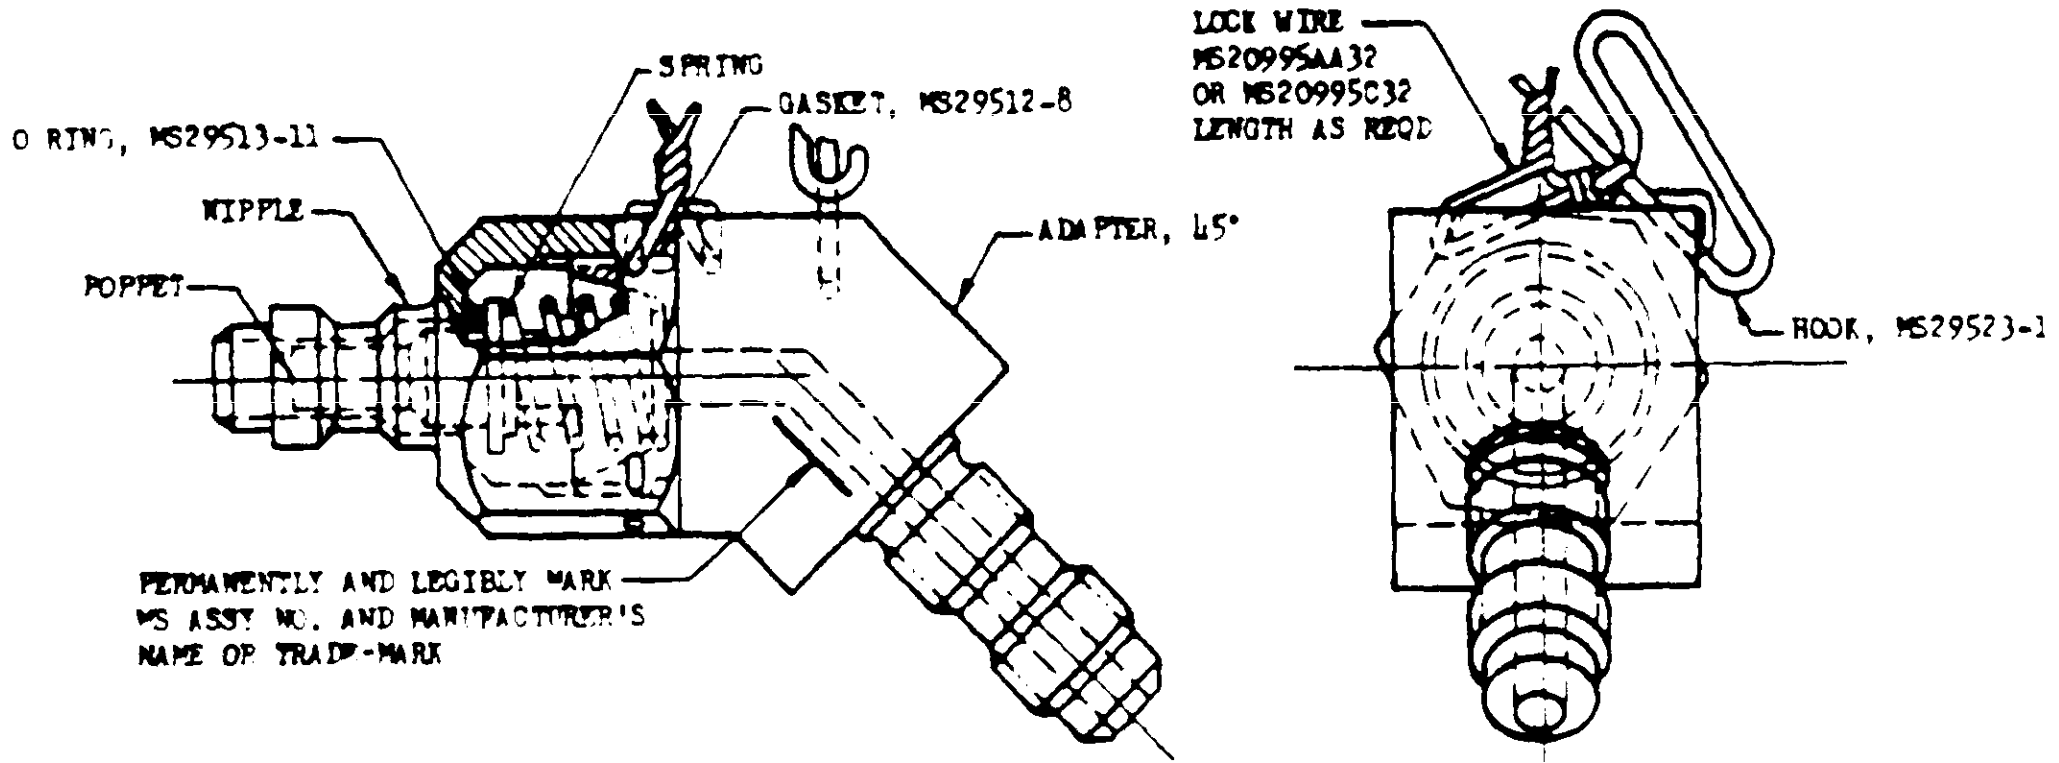
SPRING
GASKET, MS29512-8
O RING, MS29513-11
NIPPLE
POPPET
ADAPTER, 45°
PERMANENTLY AND LEGIBLY MARK MS ASSY NO. AND MANUFACTURER'S NAME OF TRADE-MARK
LOCK WIRE MS20995AA32 OR MS20995C32 LENGTH AS REQD
HOOK, MS29523-1

COUPLING, 45°

ASSY DASH NO.	FIIN	MAX WT LB
-40		.145

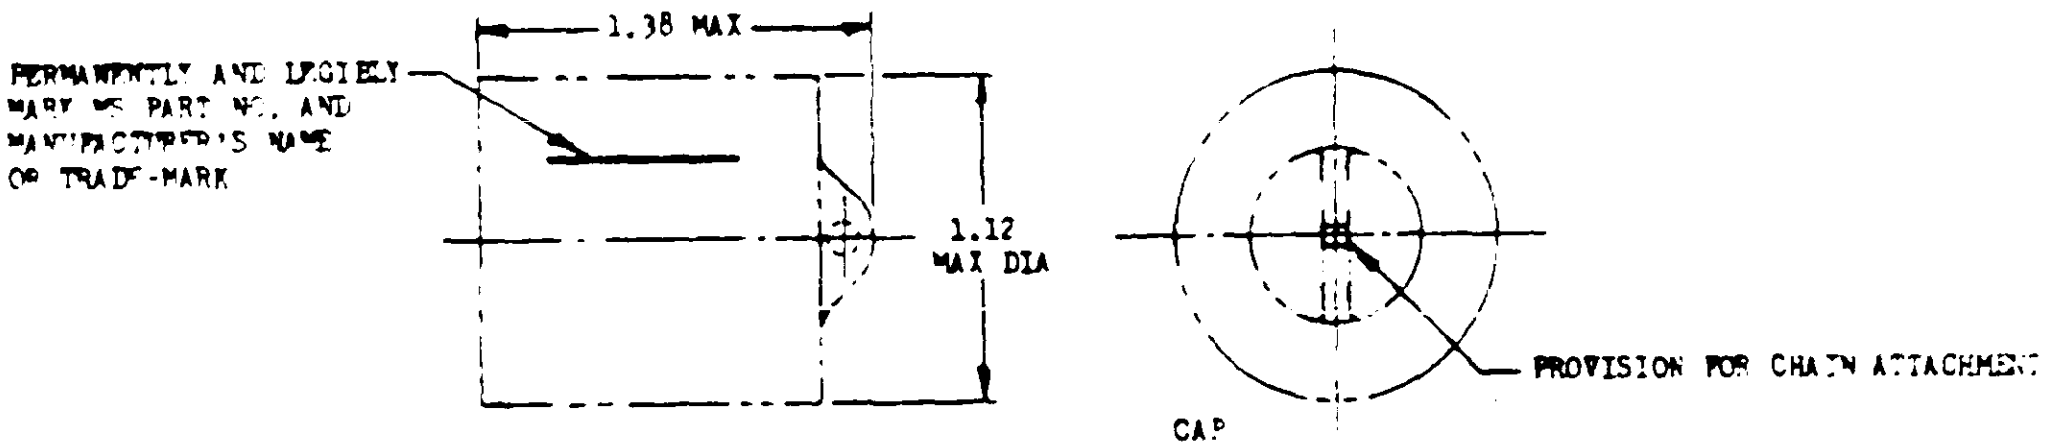
1.38 MAX
PERMANENTLY AND LEGIBLY MARK MS PART NO. AND MANUFACTURER'S NAME OR TRADE-MARK
1.12 MAX DIA
PROVISION FOR CHAIN ATTACHMENT

CAP

ASSY DASH NO.	FIIN	MAX WT LB
-400		.025

COUPLING TEST REQUIREMENTS:

BURST PRESSURE. COUPLINGS SHALL WITHSTAND A BURST PRESSURE OF 180 PSI WITHOUT FAILURE. THE UNIT SHALL WITHSTAND THIS PRESSURE IN THE COUPLED AND UNCOUPLED POSITIONS.

DISENGAGED LEAKAGE. THE DISENGAGED LEAKAGE OF FREE AIR SHALL HAVE A MAXIMUM VALUE OF 1 CU IN. PER MINUTE AT A PRESSURE OF 120 PSI.

ENGAGED LEAKAGE. THERE SHALL BE NO LEAKAGE WHEN THE COUPLING IS ENGAGED WITH AN APPLIED PRESSURE OF 120 PSI.

CAP SHALL BE SO DESIGNED THAT IT WILL NOT BECOME DISENGAGED FROM THE INLET PORT OF THE COUPLING AS A RESULT OF VIBRATION OR SHOCK IN SERVICE USE. THERE SHALL BE NO EVIDENCE OF LEAKAGE WITH 60-PSI INTERNAL AIR PRESSURE APPLIED TO THE ASSEMBLED CAP AND COUPLING WITH THE COUPLING CHECK VALVE BLOCKED OPEN.

Ⓒ MATERIAL: ADAPTERS, NIPPLE AND POPPET: ALUMINUM ALLOY, SPECIFICATION QQ-A-200/3
SPRING: COR-RES STEEL, CLASS 302 ANNEALED PER ASTM A493; CAP: ALUMINUM ALLOY.
FINISH: ADAPTERS, NIPPLE AND POPPET: ANODIZE, SPECIFICATION MIL-A-8625; CAP: SUITABLE FINISH.
COLOR IDENTIFICATION: EACH CAP AND THE BODY OF EACH COUPLING SHALL BE MARKED WITH A RED COLOR IN CONFORMANCE WITH SPECIFICATION MIL-F-8615.

Ⓒ ROUGHNESS HEIGHT RATING: ADAPTERS, NIPPLE AND POPPET $\sqrt{}^{125}$ EXCEPT AS NOTED. SURFACE ROUGHNESS IN ACCORDANCE WITH STANDARD ANSI B46-1

REMOVE ALL BURRS AND SHARP EDGES. UNLESS OTHERWISE SPECIFIED, ALL MACHINED CORNERS AND FILLETS .020 RAD.
SAFETY WIRING OF NIPPLE TO ADAPTER SHALL CONFORM TO STANDARD MS33540, FIGURE 1.
THREADS IN ACCORDANCE WITH SPECIFICATION PER-MIL-S-8879
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: TWO-PLACE DECIMALS ±.03, THREE-PLACE DECIMALS ±.010, ANGLES ±1/2°.
SEE SHEETS 2 OF 3 AND 3 OF 3 FOR DETAILS.

INACTIVE FOR NEW DESIGN AFTER 28 DEC 1967. NO SUPERSEDING STANDARD.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN [illegible] DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

Ⓒ DENOTE CHANGES

APPROVED 15 APRIL [illegible] REVISED Ⓒ 28 SEPT 1981

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: AIR FORCE - 82
NAVY - AS
ARMY - AV
DLA - CS

P.A. Navy-AS Other Cust: Ⓒ USAF - 99 ARMY - AV	OTHER INT. A - N - AF -	MILITARY STANDARD COUPLING, QUICK-DISCONNECT, LOW-PRESSURE AIR CONNECTION, BULKHEAD FITTING END, 1/4 TUBE SIZE	MS21957 Ⓒ
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: MS21957 (ASG) Ⓒ		SHEET 1 OF 3

DD FORM 1 SEP 61 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PROJECT NO. 4730-1001

FED SUP CLASS
4730

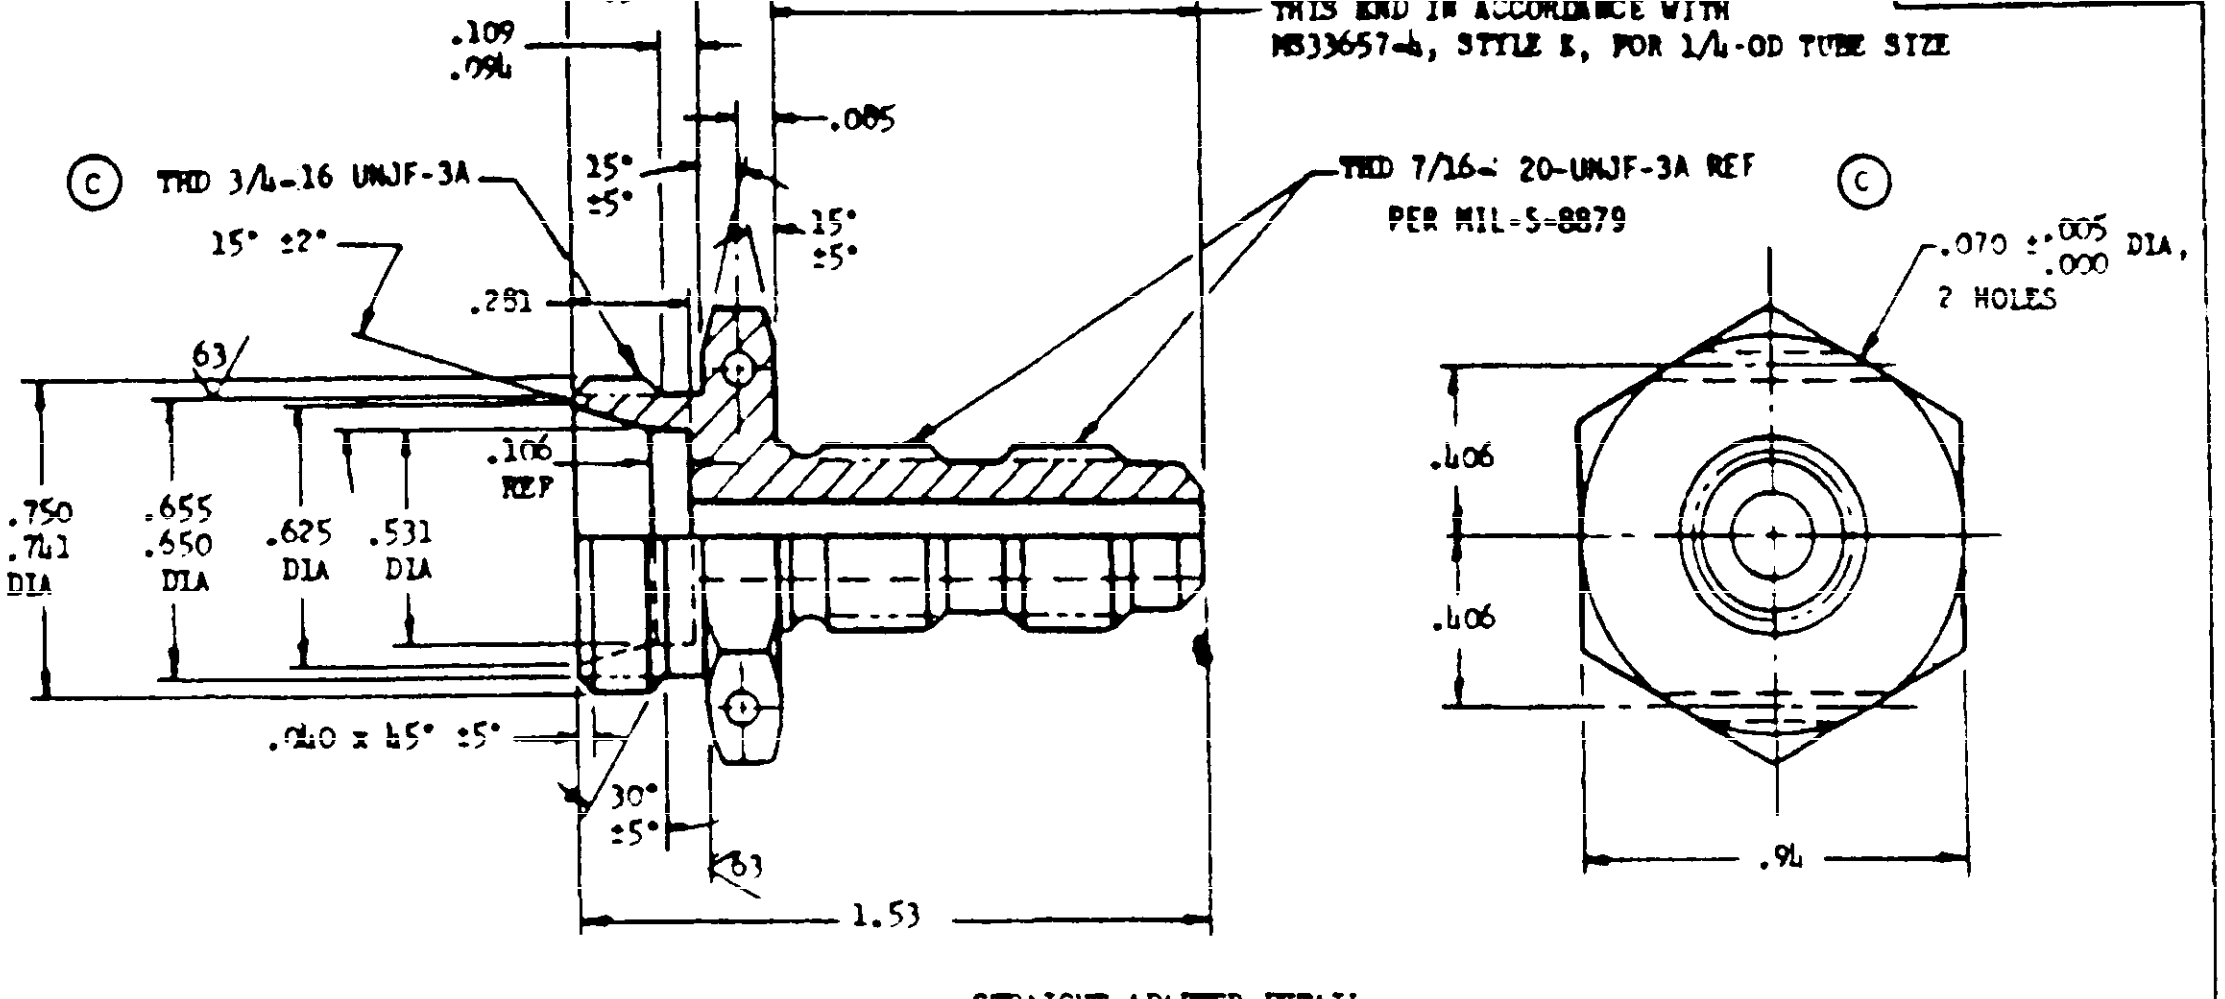

STRAIGHT ADAPTER DETAIL

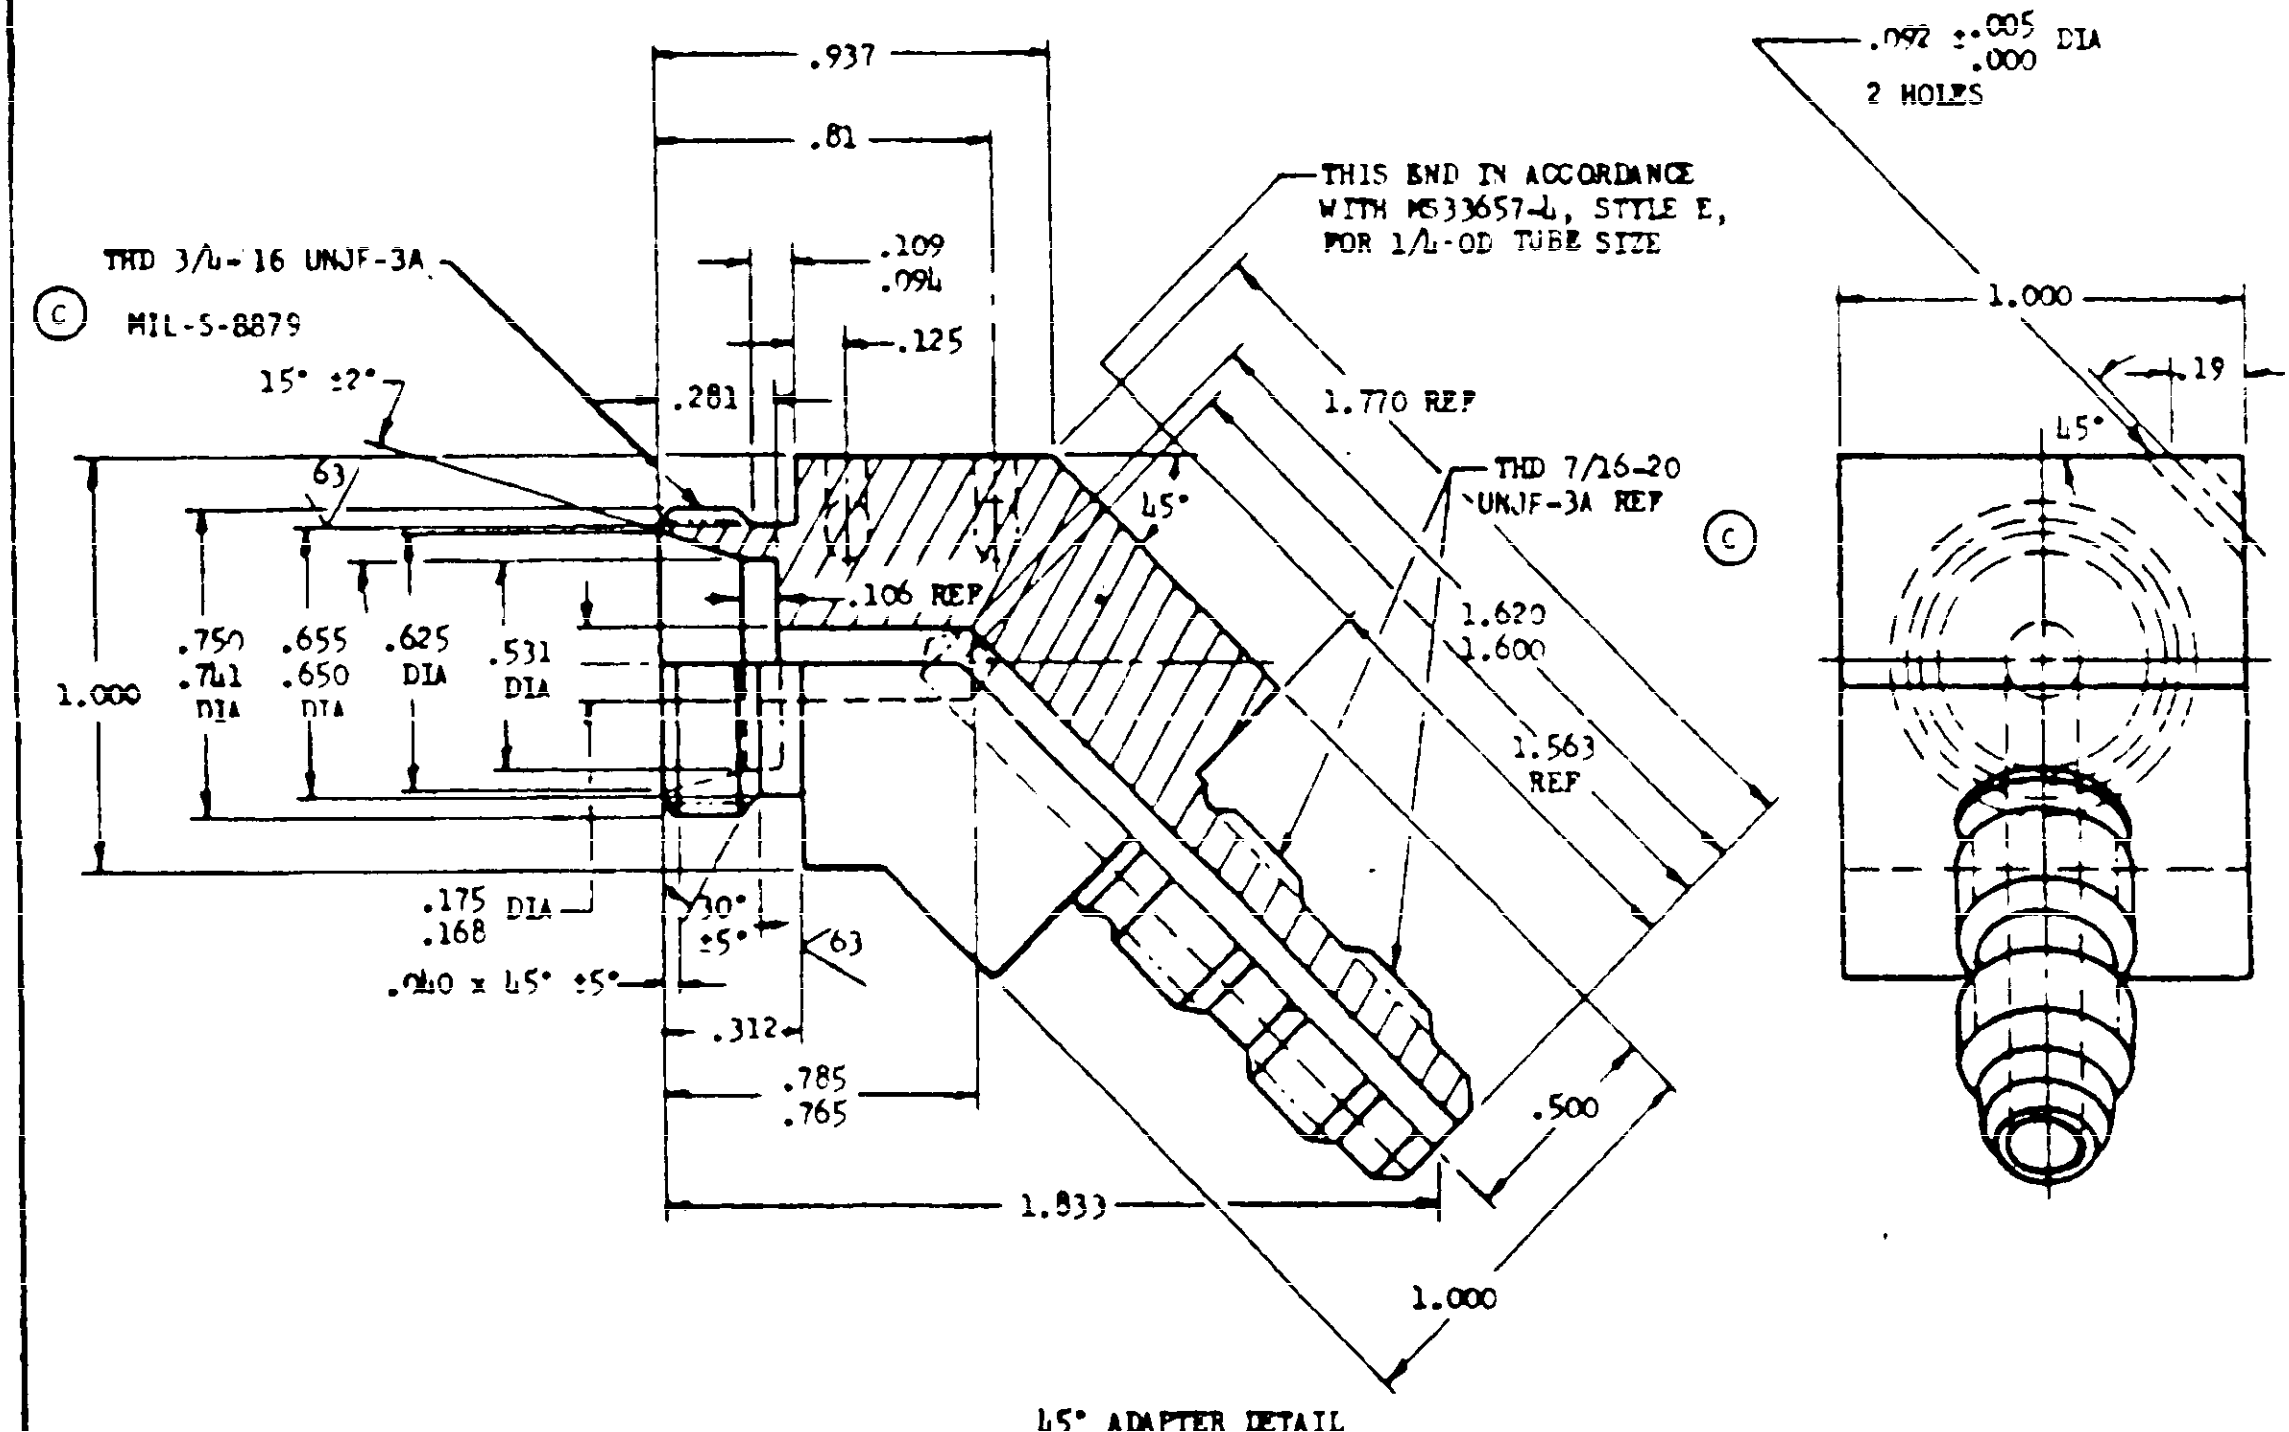

45° ADAPTER DETAIL

SEE SHEET 1 OF 3 FOR NOTES.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 15 APRIL 1957 REVISED Ⓒ FOR CHANGES SEE SHEETS 1 THRU 3

AMSC N/A

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: AIR FORCE - 82
NAVY - AS
ARMY - AV
DLA - CS

P.A. Navy-AS Other Cust: Ⓒ USAF - 99 ARMY - AV	OTHER INT. A - N - AF -	MILITARY STANDARD COUPLING, QUICK-DISCONNECT, LOW-PRESSURE AIR CONNECTION, BULKHEAD FITTING END, 1/4 TUBE SIZE	MS21957
PROCUREMENT SPECIFICATION NONE		SUPERSEDES: MS21957 (ASG) Ⓒ	SHEET 2 OF 3

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED SUP CLASS
4730

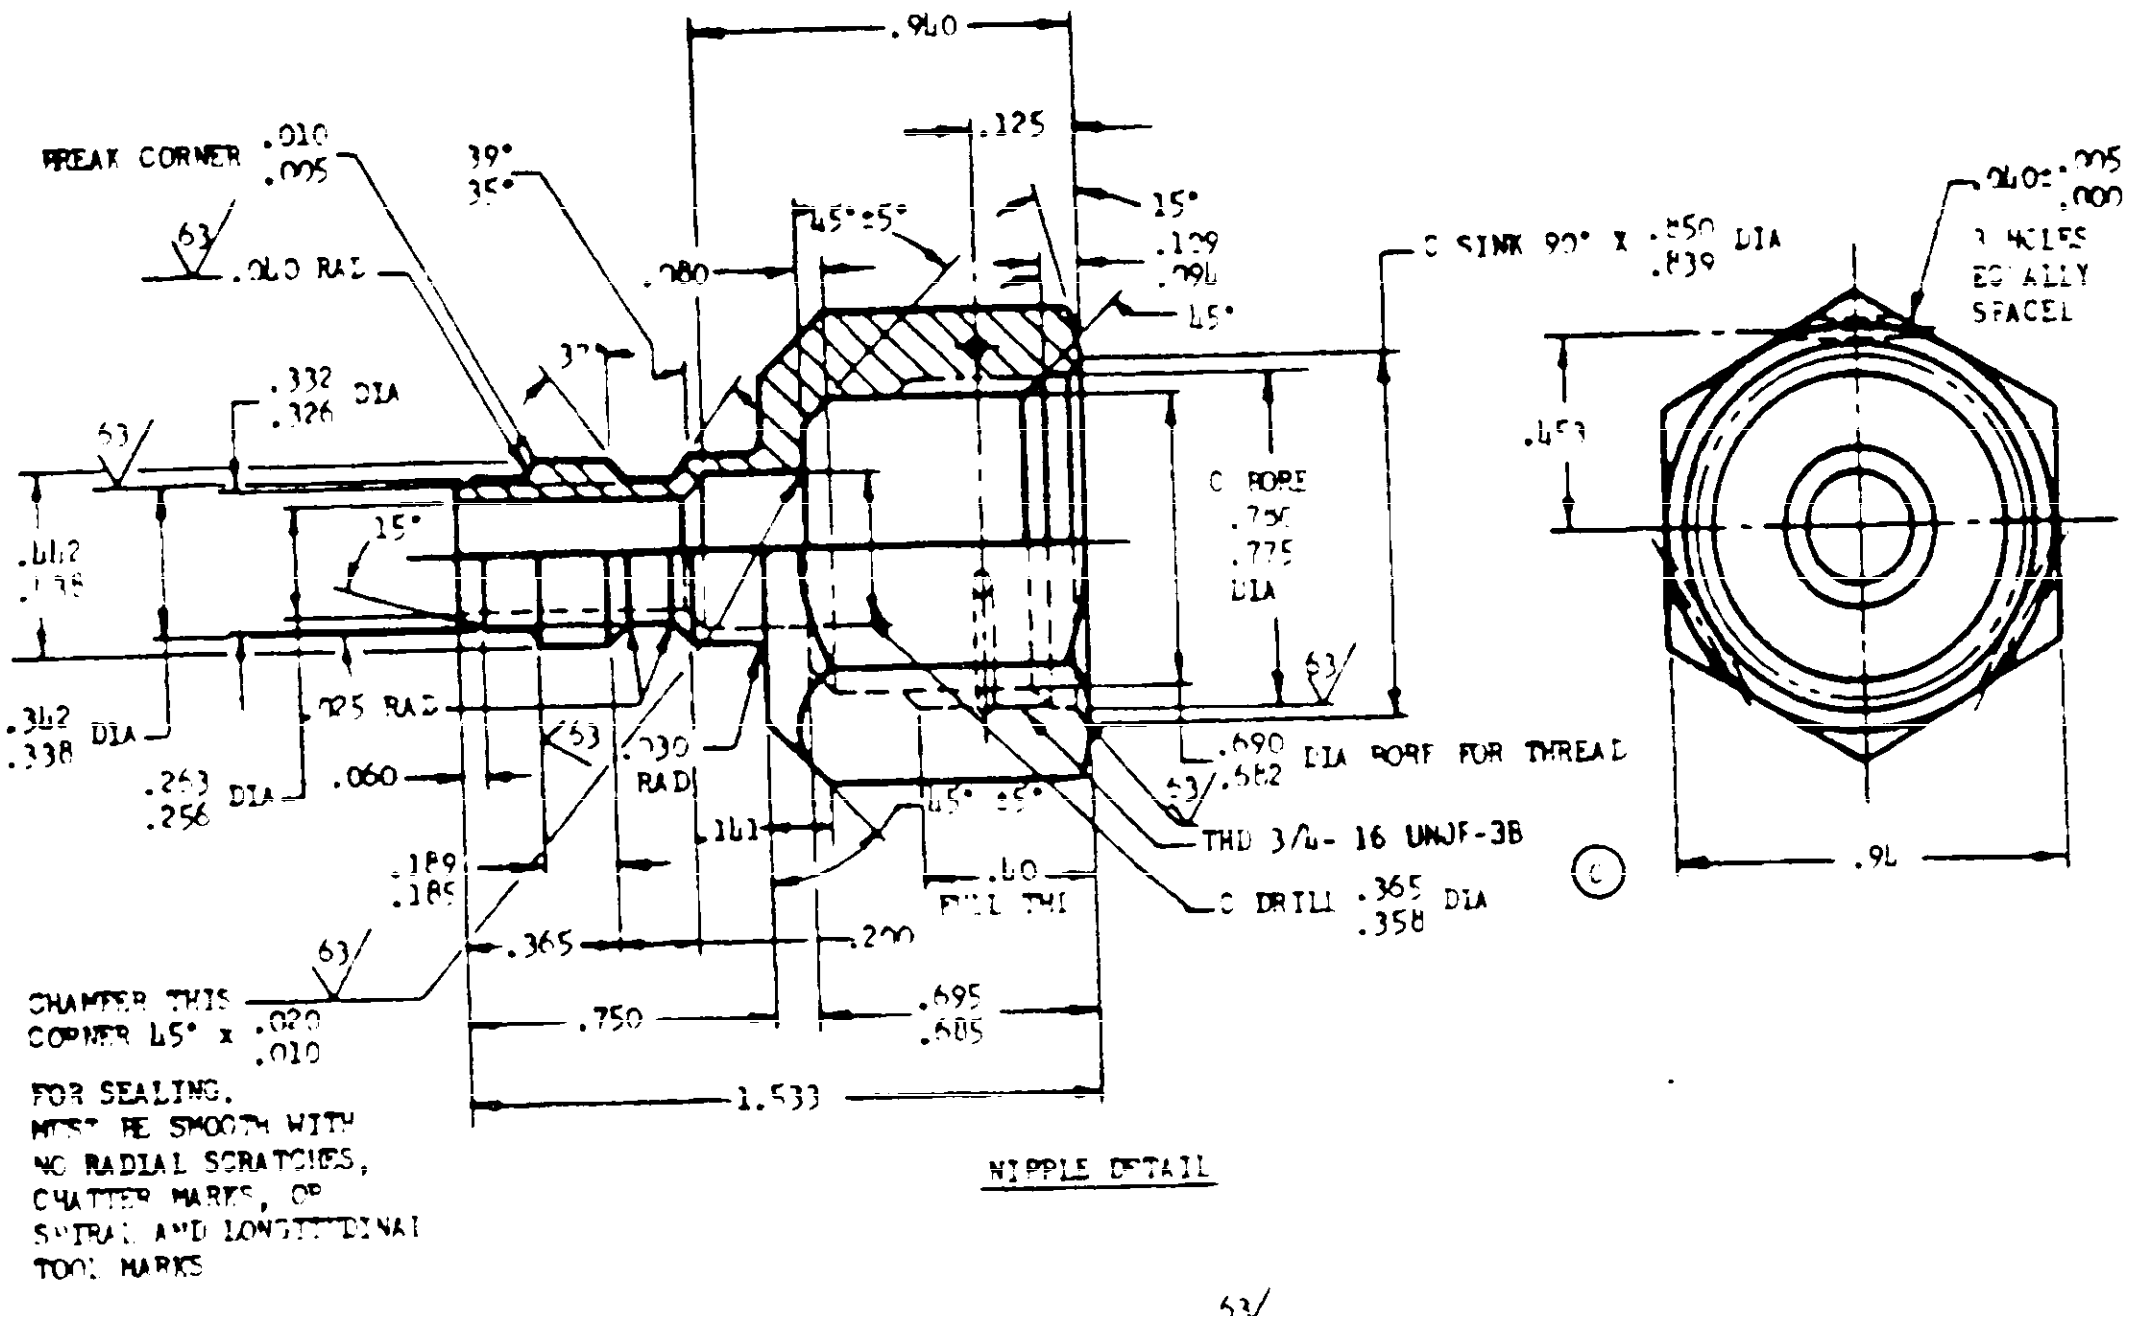

NIPPLE DETAIL

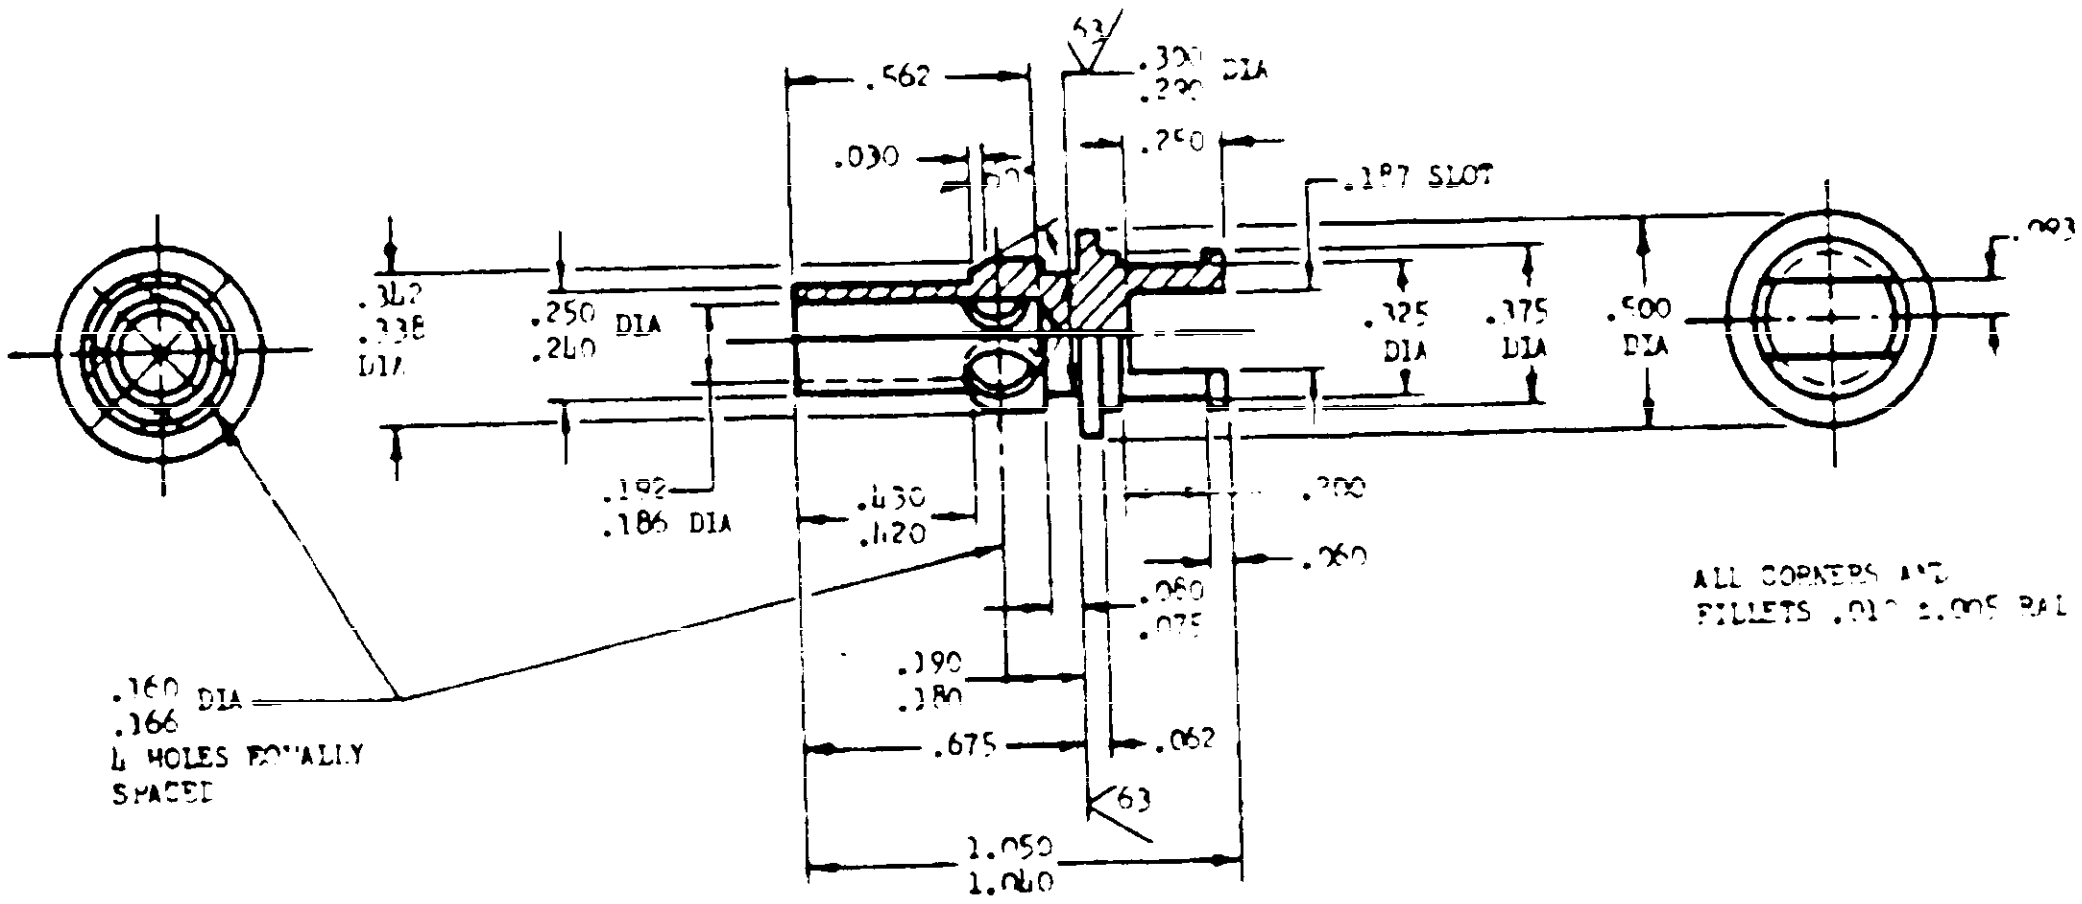

POPPET DETAIL

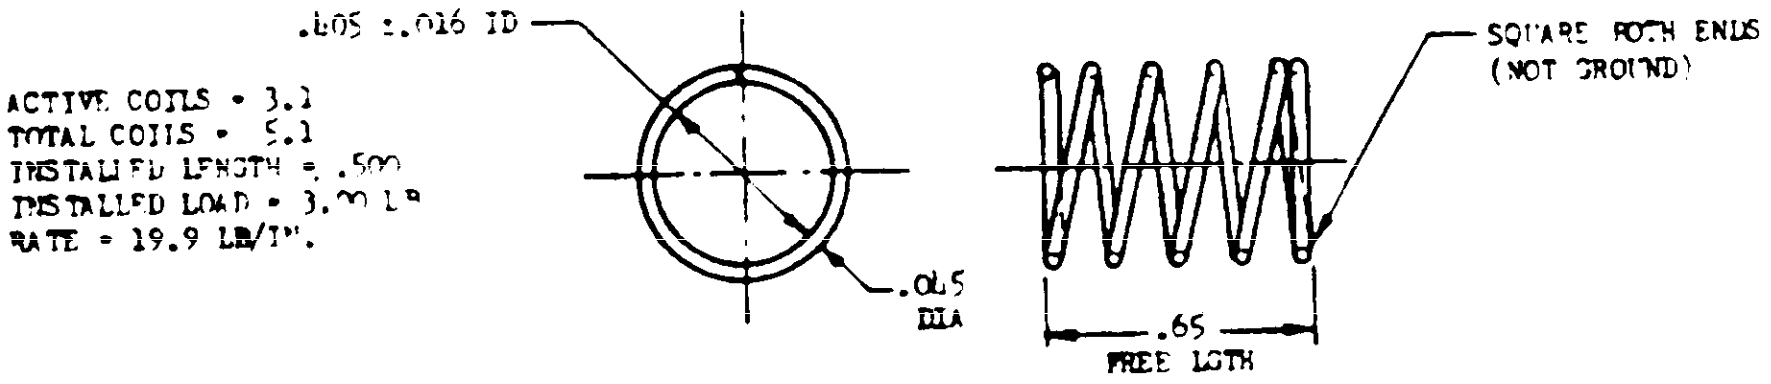

SPRING DETAIL

SEE SHEET 1 OF 3 FOR NOTES.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

APPROVED 15 APRIL 1957 REVISED © FOR CHANGES SEE SHEETS 1 THRU 3

P.A. Navy-AS Other Cust: © USAF - 99 ARMY - AV	OTHER INT. A - N - AF -	MILITARY STANDARD COUPLING, QUICK-DISCONNECT, LOW-PRESSURE AIR CONNECTION, BULKHEAD FITTING END, 1/4 TUBE SIZE	MS21957
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	MS21957 (ASG) ©	SHEET 3 OF 3

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
This military standard is approved by the Department of the Air Force and the Naval Air Systems Command and is mandatory for use by these activities. All other military activities are required to employ this standard where suitable.

Review activities: AIR FORCE - 82
NAVY - AS
ARMY - AV
DLA - CS

DD FORM 1 MAR 65 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

U.S. GOVERNMENT PRINTING OFFICE

PROJECT NO. 4730 - 1001