
THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.


THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.


Form Approved
OMB No. 0704-0188

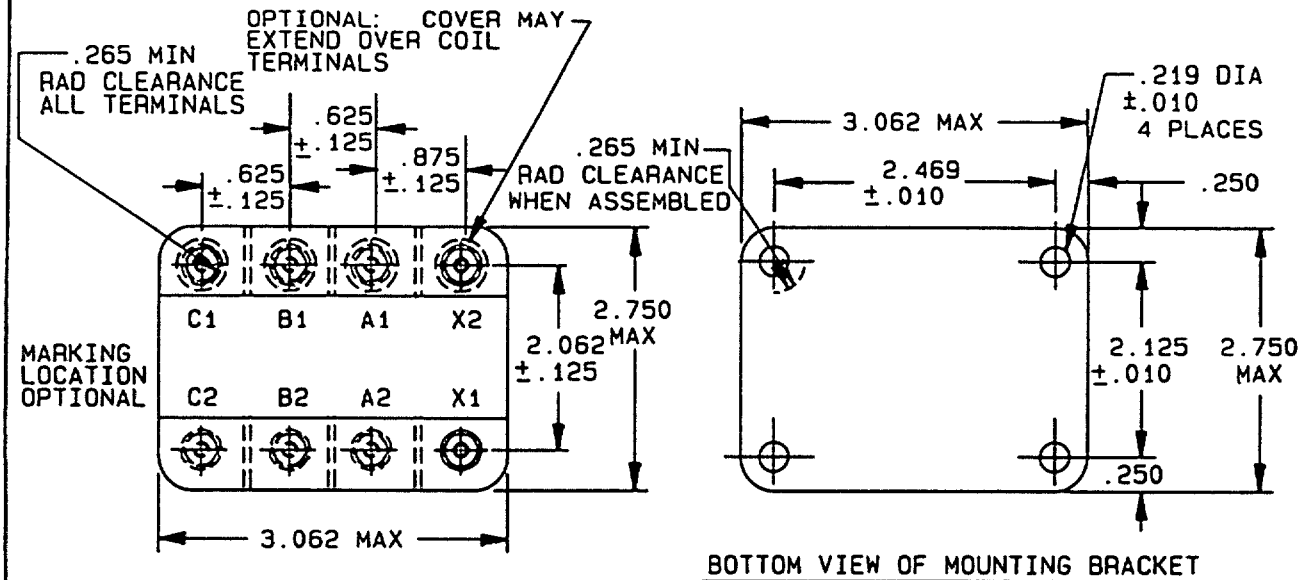


BOTTOM VIEW OF MOUNTING BRACKET

CONTOUR OPTIONAL, PROVIDED MOUNTING HOLE DIMENSIONS ARE MAINTAINED

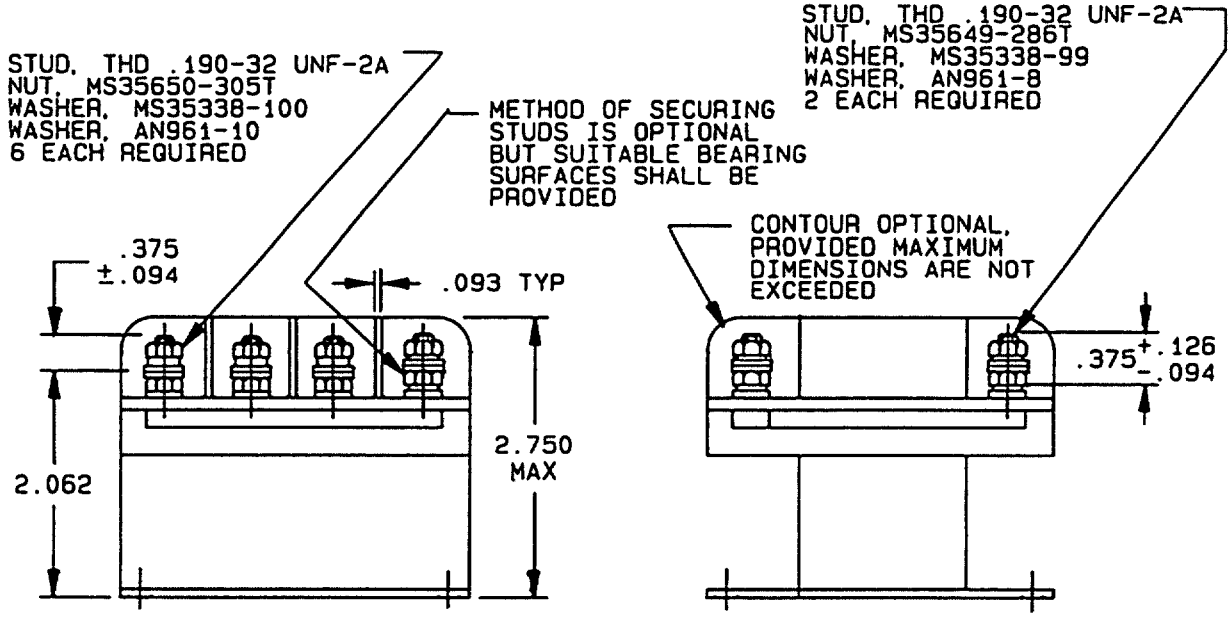


CIRCUIT

Ⓛ ENTIRE STANDARD REVISED

| | | |
|---|---|---|
| PREPARING ACTIVITY: Air Force-85<br>CUSTODIANS: ARMY - NAVY - AS<br>AIR FORCE - 85 DLA -<br>Agent: DLA-ES<br>REVIEW:<br>USER:<br>PROJECT NUMBER: 5945-0852-02 | MILITARY SPECIFICATION SHEET<br>TITLE<br>RELAYS, ELECTROMAGNETIC, 25 AMPERES, 3PST, N.O. TYPE II, NON-HERMETICALLY SEALED | SPECIFICATION SHEET NUMBER<br>MS24192L 18 April 1991<br>SUPERSEDING<br>MS24192K 9 OCT 1990<br>AMSC N/A FSC 5945 |

DISTRIBUTION STATEMENT

A: Approved for public release; distribution is unlimited.





Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

| Inches | mm | Inches | mm |
|---|---|---|---|
| .010 | 0.25 | .265 | 6.73 |
| .093 | 2.62 | .375 | 9.53 |
| .094 | 2.39 | .625 | 15.86 |
| .125 | 3.18 | .875 | 22.23 |
| .126 | 3.20 | 2.062 | 52.37 |
| .164 | 4.17 | 2.125 | 53.98 |
| .190 | 4.83 | 2.469 | 62.71 |
| .219 | 5.56 | 2.750 | 69.85 |
| .250 | 6.35 | 3.062 | 77.77 |

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerances are ±.032 inch (0.81 mm).
4. Additional flat washer may be used for terminal seat.
5. In the event of a conflict between the text of this specification sheet and the references cited herein, the text of this specification sheet shall take precedence.
6. Referenced Government documents of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification sheet to the extent specified herein.
7. Terminal numbers shall not appear on relay header. There shall be affixed to the relay a suitable legible circuit diagram that identifies each terminal location.
8. Terminal covers and barriers required at power terminals.
9. Weights do not include covers and barriers.
10. For detail information, see tables I through III.

TABLE I. Dash number and characteristics.

| Part or Identifying Number (PIN) | Type | Coil | Terminal type | Mounting | Maximum weight in pounds |
|---|---|---|---|---|---|
| MS24192-D1 1/ | II | dc | Stud | Plate | 1.2 |

1/ MS24192-D1 supersedes AN3339-1.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - NAVY - AS
AIR FORCE - 85 DLA -
REVIEW: Agent: DLA-ES
USER:
PROJECT NUMBER: 5945-0852-02

MILITARY SPECIFICATION SHEET
TITLE: RELAYS, ELECTROMAGNETIC, 25 AMPERES, 3PST, N.O. TYPE II, NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER
MS24192L
SUPERSEDING
MS24192K 9 OCT 1990
AMSC N/A FSC 5945

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.





Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.

TABLE II. Operating characteristics.

| MS PIN MS24192- | Coil data | | | | | | | | | | | Time - (milliseconds maximum) | | | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Coil | Nominal | | | Maximum | | Max pick-up voltage | | | Hold voltage 4/ | Drop-out voltage 4/ | Operate 1/ | Release 2/ | Bounce | | | |
| | | Volts 3/ | Freq. Hz | Res Ω min | Volts | Amperes | Normal 4/ | High temp test | Cont current test | | | | | Main | | Aux | |
| | | | | | | | | | | | | | | NO | NC | NO | NC |
| 01 | X1,X2 | 28 | dc | 54 | 29 | .54 | 18 | 21 | 22.5 | 7.0 | 1.5 | 20 | 15 | 2.5 | --- | --- | --- |

1/ With nominal coil voltage.
2/ From nominal coil voltage.
3/ Caution. Use of any coil voltage less than nominal coil voltage will compromise the operation of the relay.
4/ Over the temperature range.

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - AIR FORCE - 85 NAVY - DLA - AS
REVIEW: Agent: DLA-ES
USER:
PROJECT NUMBER: 5945-0852-02
DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET
TITLE: RELAYS, ELECTROMAGENTIC, 25 AMPERES, 3PST, N.O. TYPE II, NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24192L
SUPERSEDING: MS24192K 9 OCT 1990
AMSC N/A FSC 5945

DD Form 672, MAY 88 Previous editions are obsolete. Page 3 of 5

Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

Form Approved
OMB No. 0704-0188

TABLE III. Rated contact load (amperes per pole) case grounded.

| Type of load | Life operating cycles x $10^3$ | 28 V dc | | | | 115 V ac, 1 phase | | | | 115/200 V ac, 3 phase 1/ | | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Main | | Aux | | Main | | Aux | | Main | | Aux | |
| | | NO | NC | NO | NC | 400 Hz | 60 Hz | 400 Hz | 60 Hz | 400 Hz | 60 Hz | 400 Hz | 60 Hz |
| Resistive | 50 | 25 | | | | 25 | | | | 25 | | | |
| Inductive | 10 | 25 | | | | 25 | | | | 25 | | | |
| Inductive | | | | | | | | | | | | | |
| Motor | 50 | 25 | | | | 25 | | | | 25 | | | |
| Lamp | | | | | | | | | | | | | |
| Transfer load 2/ | | | | | | | | | | | | | |
| Mechanical life reduced current | 100 | 6.3 | | | | 6.3 | | | | 6.3 | | | |
| Intermediate current | | Applicable in accordance with MIL-R-6106 | | | | | | | | | | | |

1/ Absence of value indicates relay is not rated for 3 phase application.
2/ Transfer load indicates relay suitable for transfer between unsynchronized ac power supplies at rating indicated.

TABLE IV. Qualification by similarity.

| PIN | Loads | | | | | | Dynamics 1/ | | | Environmental | | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | Type 1 | | | Type 1 ER | | | | | | | | |
| | A | B | C | D | E | F | A | X | Y | A | B | C |
| MS24192-D1 | 4 | | | | | | 2 | | | 4 | | |

1/ All units must be tested, reference MIL-R-6106, construction, internal.

TABLE V. Vibration level.

| PIN | 5-10 Hz | 10-55 Hz | 55-250 Hz | 250-500 Hz |
|---|---|---|---|---|
| MS24192-D1 | .08 DA | .06 DA | 2 g | 2 g |

PREPARING ACTIVITY: Air Force-85
CUSTODIANS: ARMY - NAVY - AS
AIR FORCE - 85 DLA -
Agent: DLA-ES
REVIEW:
USER:
PROJECT NUMBER: 5945-0852-02

TITLE: MILITARY SPECIFICATION SHEET
RELAYS, ELECTROMAGNETIC, 25 AMPERES, 3PST; N.O. TYPE II, NON-HERMETICALLY SEALED

SPECIFICATION SHEET NUMBER: MS24192L
SUPERSEDING: MS 24192K 9 OCT 1990
AMSC N/A FSC 5945

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 Previous editions are obsolete.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION: MIL-R-6106.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

## Environmental characteristics

| | |
|---|---|
| Temperature range | -55°C to +71°C |
| Maximum altitude rating | 50,000 ft |
| Shock G-level | 25 g's |
| Duration | 6-9 ms |
| Maximum duration contact opening | 2 ms |
| Vibration: | |
| Sinusoidal | (see table V) |
| G-level | |
| Frequency range | |
| Vibration - random | N/A |
| Applicable specification | N/A |
| Power spectral density | N/A |
| RMS G minimum | N/A |
| Frequency range curve | N/A |
| High shock | N/A |
| Acceleration | 10 g's |

## Electrical characteristics

| | |
|---|---|
| Minimum insulation resistance, initial | 100 megohms |
| After life or environmental tests | 50 megohms |
| Dielectric strength (sea level) (see table VI) | 2-5 seconds |

TABLE VI. Dielectric strength (sea level).

| | Initial | | After life tests | |
|---|---|---|---|---|
| Dielectric strength | 28 V dc | 115 V ac | 28 V | 115 V |
| Coil to case | 1,250 | N/A | 1,000 | N/A |
| Auxiliary contacts | 1,250 | N/A | 1,000 | N/A |
| All other points | 1,250 | 1,500 | 1,000 | N/A |

Dielectric strength (altitude) (see table VII) 1 minute

TABLE VII. Dielectric strength (altitude).

| Dielectric strength | 28 V dc | 115 V ac |
|---|---|---|
| Coil to case | 500 | N/A |
| Auxiliary contacts | 500 | N/A |
| All other points | 700 | N/A |

| | |
|---|---|
| Maximum contact drop initial | .150 volt |
| After life test | .175 volt |
| Overload current (N.O.) | 200 amperes |
| Rupture current (N.O.) | 250 amperes |
| Duty rating | Continuous |
| RFI specification (Applicable to coil circuits of ac operated relays) | N/A |

| | | |
|---|---|---|
| PREPARING ACTIVITY: Air Force-85<br>CUSTODIANS: ARMY - NAVY - AS<br>AIR FORCE - 85 DLA -<br>REVIEW: Agent: DLA-ES<br>USER:<br>PROJECT NUMBER: 5945-0852-02 | MILITARY SPECIFICATION SHEET<br>TITLE RELAYS, ELECTROMAGNETIC, 25 AMPERES, 3PST, N.O. TYPE II, NON-HERMETICALLY SEALED | SPECIFICATION SHEET NUMBER<br>MS24192L<br>SUPERSEDING<br>MS24192K 9 OCT 1990<br>AMSC N/A FSC 5945 |

DISTRIBUTION STATEMENT
A: Approved for public release; distribution is unlimited.



DD Form 672, MAY 88 Previous editions are obsolete.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T14:50Z
Check the source to verify that this is the current version before use.