INCH-POUND

MS24266P
7 August 2015
SUPERSEDING
MS24266N
20 August 2009


DETAIL SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, STRAIGHT, MINIATURE, CLASSES E, F, G AND R

Inactive for new design after 14 November 1977.
For new design, use MIL-DTL-83723, series III.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-26500.

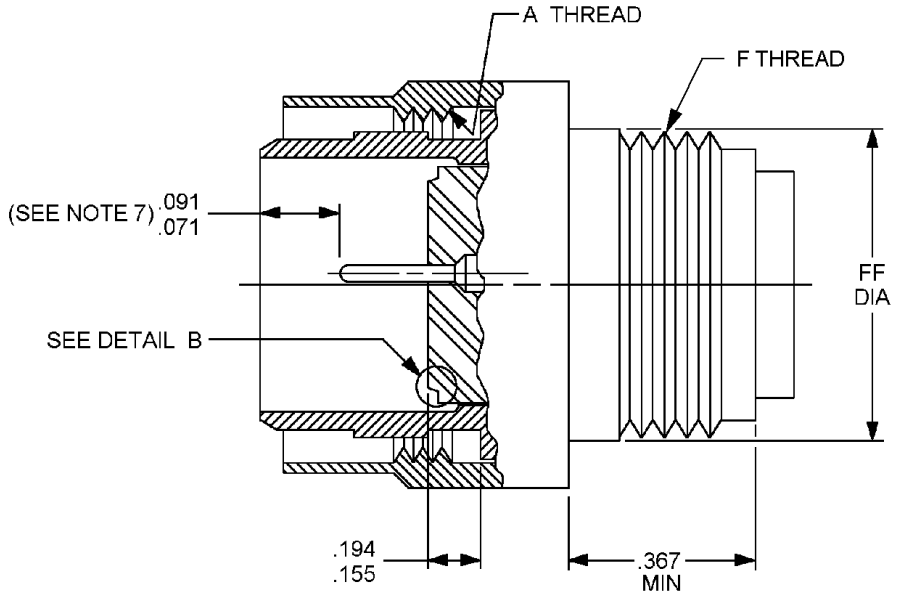

(SEE NOTE 10)


STYLE P (PIN INSERT) FOR CLASSES F, G, R AND E

FIGURE 1. Plug, threaded coupling, type T.

AMSC N/A

FSC 5935


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

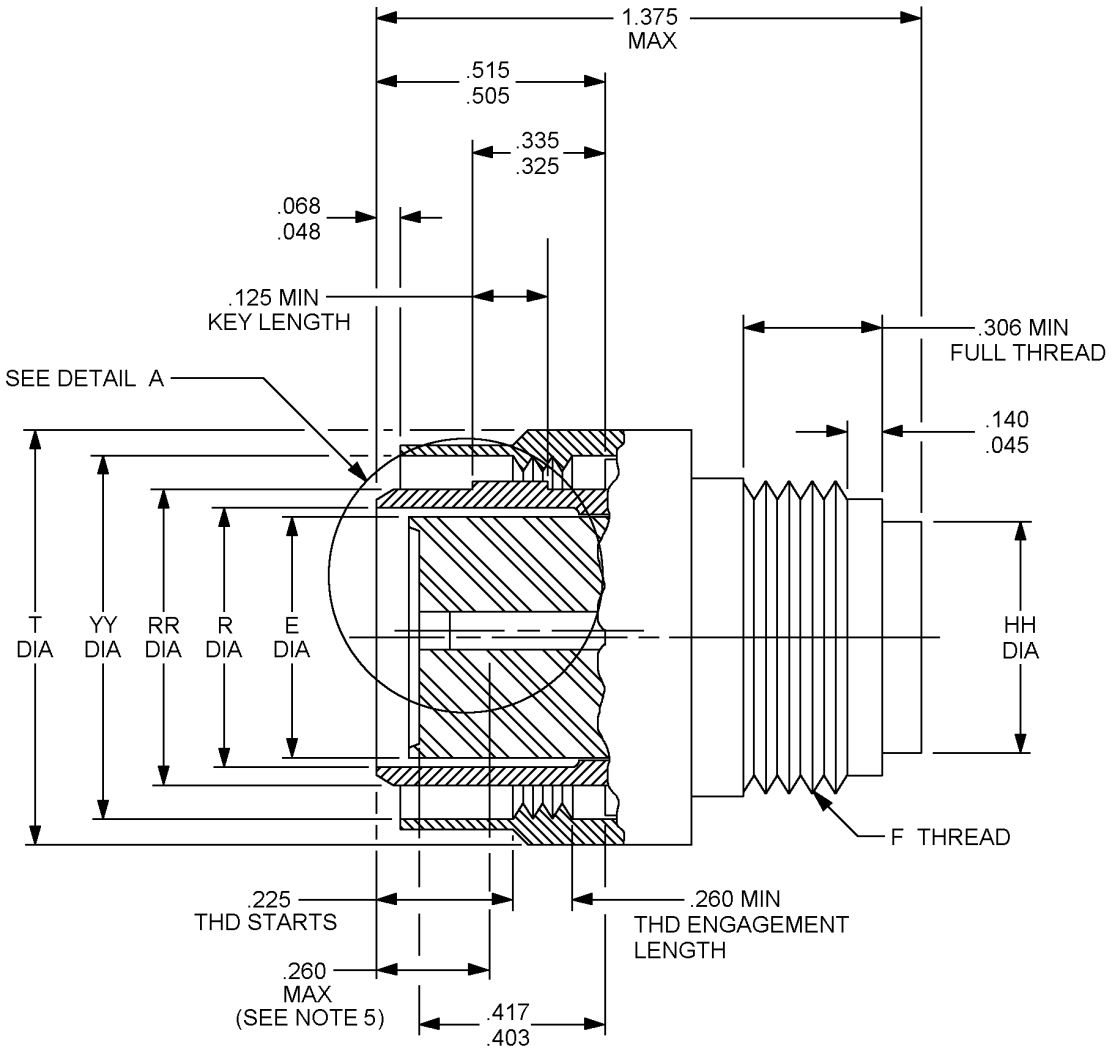

STYLE S (SOCKET INSERT), CLASSES F, G, R AND E

FIGURE 1. Plug, threaded coupling, type T – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

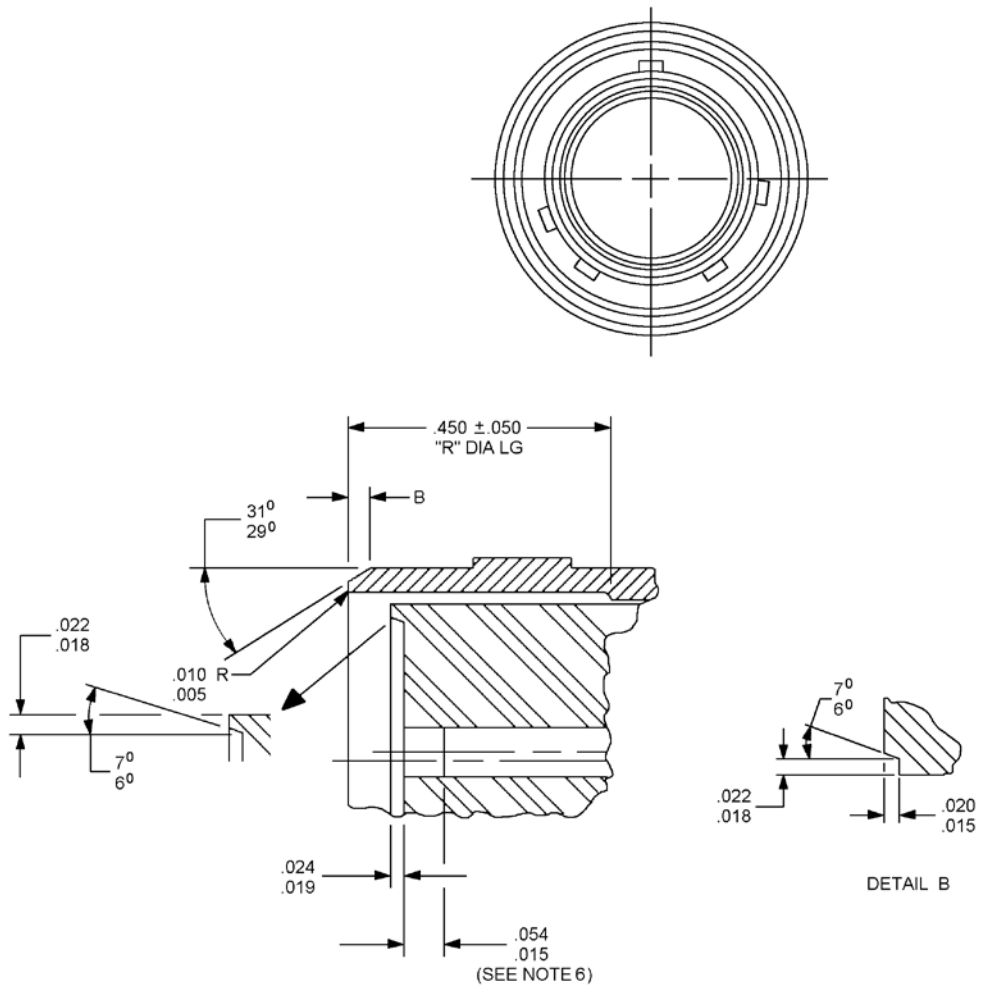

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.045	1.14	.140	3.56	.367	9.32
.010	0.25	.048	1.22	.180	4.57	.403	10.24
.015	0.38	.050	1.27	.194	4.93	.417	10.59
.018	0.46	.054	1.37	.225	5.72	.450	11.43
.019	0.48	.068	1.73	.260	6.60	.505	12.83
.020	0.51	.071	1.80	.306	7.77	.515	13.08
.022	0.56	.091	2.31	.325	8.26	1.375	34.92
.024	0.61	.125	3.18	.335	8.51		

FIGURE 1. Plug, threaded coupling, type T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

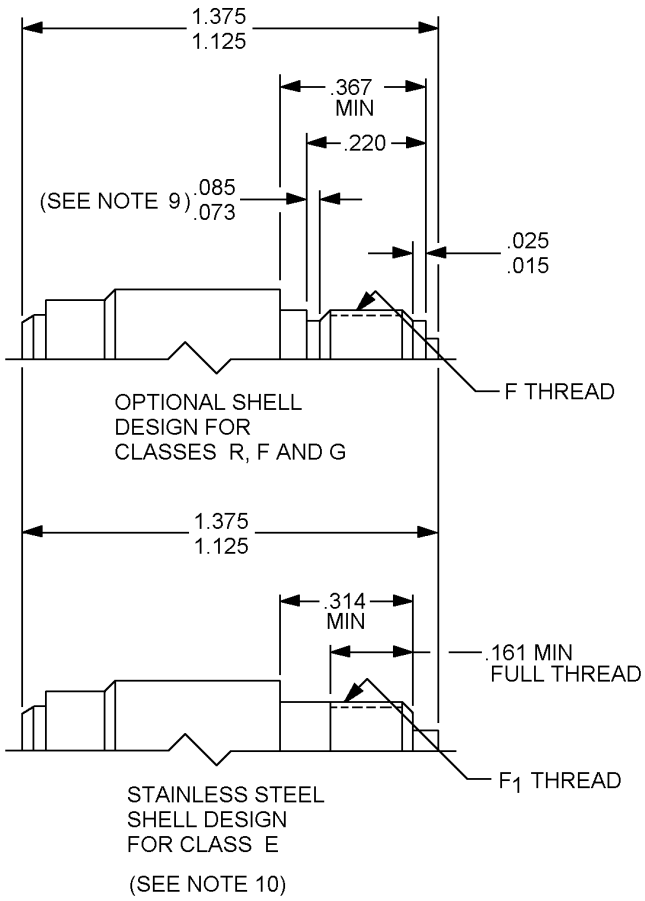

OPTIONAL SHELL DESIGN,
CLASSES F, G & R

SHELL DESIGN
CLASS E ONLY

Inches	mm	Inches	mm	Inches	mm
.015	0.38	.161	4.09	.367	9.32
.025	0.66	.220	5.59	1.125	28.58
.073	1.85	.314	7.98	1.375	34.92
.085	2.16				

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerance on decimals is ± .005.
2. Metric equivalents are given for information only.
3. All diameters to be concentric with each other within .015 T.I.R.
4. All diameters in the same plane to be concentric with each other within .004 T.I.R.
5. Distance between end of shell and the point at which a gauge pin having the same basic diameter as the mating contact and a square face, engages socket contact spring.
6. Dimensions on pin and socket contact locations and end of shell to insert faces apply when contacts are placed in inserts for inspection or application.


FIGURE 1. Plug, threaded coupling, type T – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

7. Dimensions .071 may reduce to .056 minimum under pressures caused by molded cable assemblies or sharp cable bends.
8. Use tool MIL-I-81969/17 to assemble contacts into this connector, and use tool MIL-I-81969/19 to remove contacts from this connector.
9. Thread relief groove is optional on shell. When groove is omitted the length of full thread from front of shell will be .221 minimum.
10. Environment resistant (classes F and R) plugs, type T aluminum shell material. Grounding environment resistant (class G) plugs, type T aluminum shell material. Environment resistant (class E) plugs, type T stainless steel shell material.
11. True position (T.P.) tolerances specified are for maximum material conditions (M.M.C.).
12. Application note: For new design, use MIL-DTL-83723. Note: MIL-DTL-83723, series III, specifies accessory threads and accessories that are not fully compatible with MIL-DTL-26500 connectors. Recommend using MIL-DTL-26500 cable clamps with these connectors.

FIGURE 1. Plug, threaded coupling, type T – Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

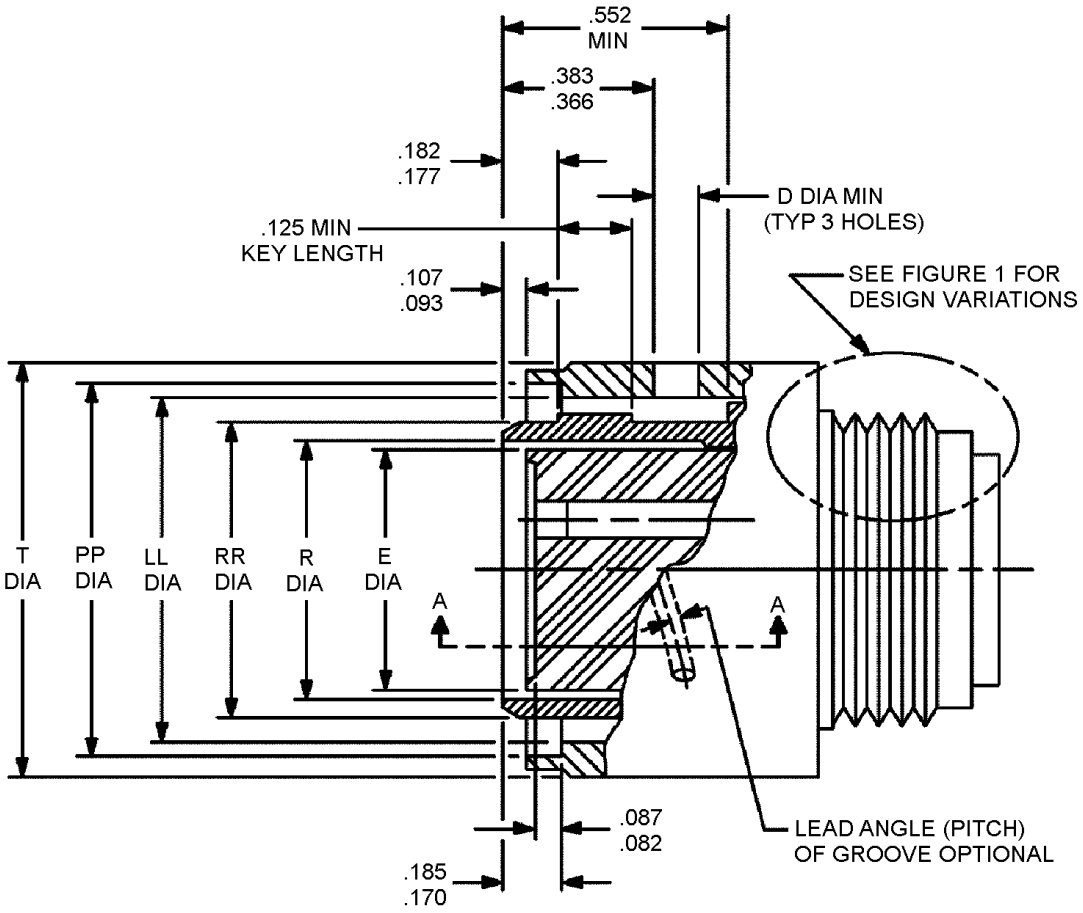

STYLE S (SOCKET INSERT) FOR CLASSES F, G, R AND E

FIGURE 2. Plug, bayonet coupling, type B.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

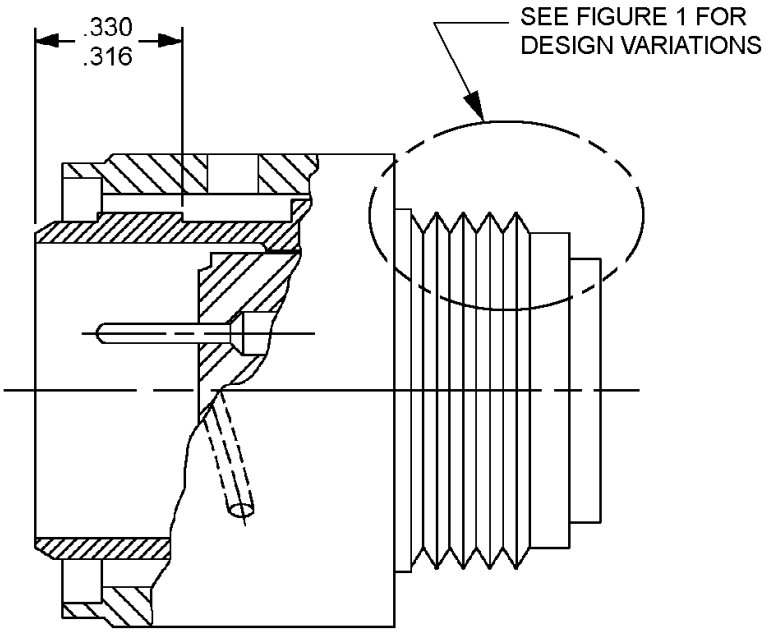

(SEE NOTE 10)

STYLE P


PIN INSERT

STYLE P (PIN INSERT) FOR CLASSES F, G, R AND E

Inches	mm	Inches	mm	Inches	mm
.004	0.10	.107	2.71	.330	8.38
.005	0.13	.125	3.18	.366	9.30
.082	2.08	.177	4.50	.383	9.73
.087	2.21	.188	4.78	.552	14.02
.093	2.36	.316	8.03		

FIGURE 2. Plug, bayonet coupling, type B – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

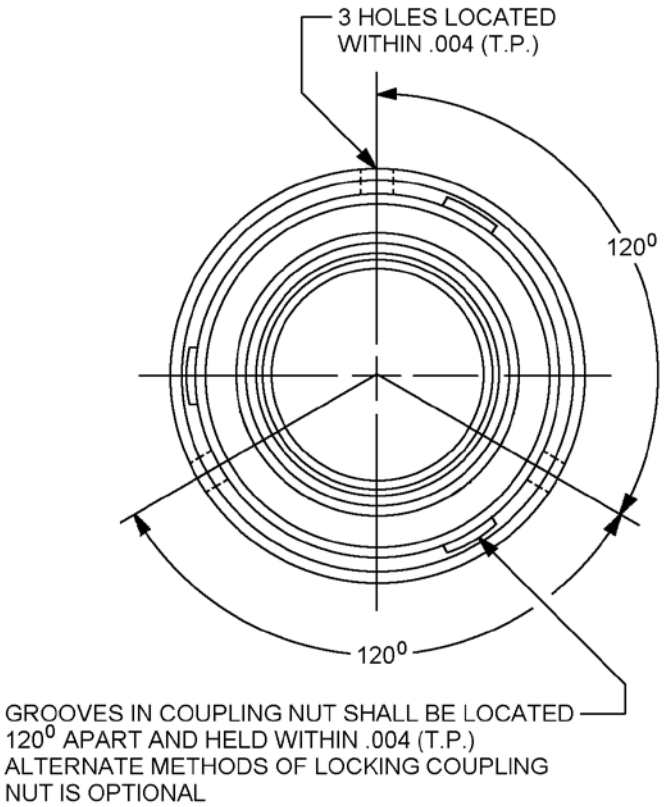

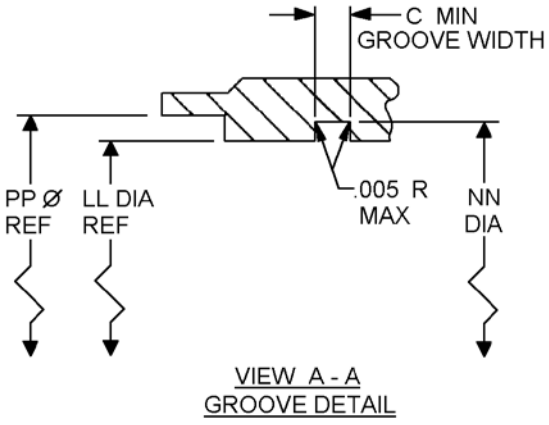


FIGURE 2. Plug, bayonet coupling, type B – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerance on decimals is ± .005.
2. Metric equivalents are given for information only.
3. All diameters to be concentric with each other within .015 T.I.R.
4. All diameters in the same plane to be concentric with each other within .004 T.I.R.
5. Distance between end of shell and the point at which a gauge pin having the same basic diameter as the mating contact and a square face, engages socket contact spring.
6. Dimensions on pin and socket contact locations and end of shell to insert faces apply when contacts are placed in inserts for inspection or application.
7. Dimension .071 may reduce to .056 minimum under pressures caused by molded cable assemblies or sharp cable bends.
8. Use tool MIL-I-81969/17 to assemble contacts into this connector, and use tool MIL-I-81969/19 to remove contacts from this connector.
9. Thread relief groove is optional on shell. When groove is omitted the length of full thread from front of shell will be .221 minimum.
10. Environment resistant (classes F and R) plugs, type B, aluminum shell material. Grounding environment resistant (class G) plugs, types B,-aluminum shell material. Environment resistant (class E) plugs, types B,-stainless steel shell material.
11. True position (T.P.) tolerances specified are for maximum material conditions (M.M.C.).
12. Application note: For new design, use MIL-DTL-83723. Note: MIL-DTL-83723, series III, specifies accessory threads and accessories that are not fully compatible with MIL-DTL-26500 connectors. Recommend using MIL-DTL-26500 cable clamps with these connectors.

FIGURE 2. Plug, bayonet coupling, type B – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Shell size	A UNEF-2B coupling	B	C min	D min dia	E max insert dia	F UNEF-2A access thd
8	.5625-24 (14.27)	.025 (.66)	.079 (2.01)	.079 (2.01)	.318 (8.08)	.4375-28 (11.10)
10	.6875-24 (17.45)	.031 (.79)	.094 (2.39)	.094 (2.39)	.394 (10.01)	.5625-24 (14.27)
12	.875-20 (22.22)	.031 (.79)	.094 (2.39)	.094 (2.39)	.564 (14.33)	.750-20 (19.05)
14	.9375-20 (23.80)	.031 (.79)	.094 (2.39)	.094 (2.39)	.633 (16.08)	.8125-20 (20.62)
16	1.0625-10 (26.97)	.031 (.79)	.094 (2.39)	.094 (2.39)	.760 (19.30)	.9375-20 (23.80)
18	1.1875-18 (30.15)	.031 (.79)	.094 (2.39)	.094 (2.39)	.866 (22.00)	1.0625-18 (26.97)
20	1.3125-18 (33.32)	.031 (.79)	.094 (2.39)	.094 (2.39)	.991 (25.17)	1.1875-18 (30.15)
22	1.4375-18 (36.50)	.031 (.79)	.094 (2.39)	.094 (2.39)	1.1161 (28.35)	1.3125-18 (33.32)
24	1.5625-18 (39.67)	.031 (.79)	.094 (2.39)	.094 (2.39)	1.241 (31.52)	1.4375-18 (36.50)

Shell size	F_1 -36NS-2A (class E, only)	F_1 pitch dia (class E, only)	FF max dia
8	.4340	.4151/.4114 (10.544/10.450)	.437 (11.10)
10	.5634	.5454/.5415 (13.853/13.754)	.562 (14.27)
12	.7334	.7154/.7115 (18.171/18.072)	.750 (19.50)
14	.8032	.7841/.7806 (19.961/19.827)	.812 (20.62)
16	.9302	.9110/.9074 (23.134/23.048)	.938 (23.82)
18	1.0362	1.0171/1.0134 (25.834/25.740)	1.062 (26.97)
20	1.1611	1.1431/1.1385 (29.034/28.918)	1.182 (30.02)
22	1.2862	1.2670/1.2633 (32.182/32.088)	1.312 (33.32)
24	1.4111	1.3931/1.3885 (35.385/35.268)	1.432 (36.37)

FIGURE 3. Plug, dimensions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Shell size	HH max grommet dia	LL dia + .005 (0.12) - .000 (0.00)	NN min dia	PP min dia	R min dia
8	.328 (8.33)	.539 (13.69)	.632 (16.05)	.632 (16.05)	.352 (8.94)
10	.420 (10.67)	.662 (16.81)	.760 (19.30)	.760 (19.30)	.428 (10.87)
12	.580 (14.73)	.832 (21.13)	.930 (23.62)	.930 (23.62)	.598 (15.19)
14	.664 (16.86)	.901 (22.88)	.999 (25.37)	.999 (25.37)	.667 (16.94)
16	.769 (19.53)	1.028 (26.11)	1.126 (28.60)	1.126 (28.60)	.794 (20.17)
18	.902 (23.37)	1.134 (28.80)	1.232 (31.29)	1.232 (31.29)	.900 (22.86)
20	1.033 (26.24)	1.261 (32.03)	1.357 (34.47)	1.357 (34.47)	1.025 (26.04)
22	1.152 (29.26)	1.384 (35.15)	1.482 (37.66)	1.482 (37.66)	1.150 (29.21)
24	1.282 (32.56)	1.511 (38.38)	1.607 (40.82)	1.607 (40.82)	1.275 (32.38)

FIGURE 3. Plug, dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Shell size	RR dia + .000 (0.00) - .005 (0.12)	T max OD coupling nut	YY min dia
8	.424 (10.77)	.776 (19.71)	.583 (14.81)
10	.526 (13.36)	.906 (23.01)	.707 17.96)
12	.696 (17.68)	1.078 (27.38)	.895 (22.73)
14	.765 (19.43)	1.141 (28.98)	.957 (24.31)
16	.892 (22.66)	1.266 (32.16)	1.084 (27.53)
18	.998 (25.35)	1.375 (34.47)	1.209 (30.71)
20	1.123 (28.52)	1.510 (38.35)	1.334 (33.88)
22	1.248 (31.70)	1.625 (41.28)	1.459 (37.06)
24	1.373 (34.87)	1.760 (44.70)	1.584 (40.23)

NOTES:

1. Dimensions are in inches. Unless otherwise specified, tolerance on decimals is ± .005.
2. Metric equivalents are given for general information only.
3. All diameters to be concentric with each other within .015 T.I.R.
4. All diameters in the same plane to be concentric with each other within .004 T.I.R.
5. Distance between end of shell and the point at which a gauge pin having the same basic diameter as the mating contact and a square face, engages socket contact spring.
6. Dimensions on pin and socket contact locations and end of shell to insert faces apply when contacts are placed in inserts for inspection or application.
7. Dimension .071 may reduce to .056 minimum under pressures caused by molded cable assemblies or sharp cable bends.
8. Use tool MIL-I-81969/17 to assemble contacts into this connector, and use tool MIL-I-81969/19 to remove contacts from this connector.
9. Thread relief groove is optional on shell. When groove is omitted the length of full thread from front of shell will be .221 minimum.
10. Environment resistant (classes F and R) plugs, types B and T, aluminum shell material. Grounding environment resistant (class G) plugs, types B and T, aluminum shell material. Environment resistant (class E) plugs, types B and T, stainless steel shell material.
11. True position (T.P.) tolerances specified are for maximum material conditions (M.M.C).
12. Application note: For new design, use MIL-DTL-83723. Note: MIL-DTL-83723, series III, specifies accessory threads that are not fully compatible with MIL-DTL-26500 connectors. Recommend using MIL-DTL-26500 cable clamps with these connectors.

FIGURE 3. Plug, dimensions – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

Weight chart		
Maximum connector weight in pounds		
Pin insert		
MS PIN	Less contacts	With contacts
MS24266R8T2PN	.028	.030
MS24266R10T2PN	.040	.042
MS24266R10T5PN	.039	.043
MS24266R10T20PN	.040	.044
MS24266R12T3PN	.055	.060
MS24266R12T12PN	.053	.063
MS24266R14T3PN	.059	.069
MS24266R14T4PN	.059	.074
MS24266R14T7PN	.059	.072
MS24266R14T12PN	.059	.072
MS24266R14T15PN	.059	.073
MS24266R16T10PN	.072	.090
MS24266R16T24PN	.071	.091
MS24266R18T8PN	.081	.110
MS24266R18T11PN	.078	.102
MS24266R18T14PN	.078	.103
MS24266R18T31PN	.078	.104
MS24266R20T16PN	.098	.126
MS24266R20T25PN	.095	.133
MS24266R20T28PN	.097	.132
MS24266R20T39PN	.097	.132
MS24266R20T41PN	.097	.131
MS24266R22T12PN	.110	.153
MS24266R22T19PN	.110	.154
MS24266R22T32PN	.110	.153
MS24266R22T55PN	.106	.153
MS24266R24T43PN	.129	.184
MS24266R24T57PN	.128	.181
MS24266R24T61PN	.125	.176

Weight chart		
Maximum connector weight in pounds		
Socket insert		
MS PIN	Less contacts	With contacts
MS2466R8T2SN	.029	.031
MS2466R10T2SN	.041	.043
MS2466R10T5SN	.040	.044
MS2466R10T20SN	.041	.045
MS2466R12T3SN	.057	.062
MS2466R12T12SN	.054	.064
MS2466R14T3SN	.061	.070
MS2466R14T4SN	.061	.076
MS2466R14T7SN	.061	.072
MS2466R14T12SN	.061	.074
MS2466R14T15SN	.061	.074
MS2466R16T10SN	.071	.089
MS2466R16T24SN	.074	.094
MS2466R 18T8SN	.084	.112
MS2466R18T11SN	.082	.105
MS2466R18T14SN	.082	.107
MS2466R18T31SN	.082	.107
MS2466R20T16SN	.101	.129
MS2466R20T25SN	.099	.136
MS2466R20T26SN	.099	.133
MS2466R20T39SN	.099	.133
MS2466R20T41SN	.099	.133
MS2466R22T12SN	.117	.156
MS2466R22T19SN	.117	.150
MS2466R22T32SN	.117	.160
MS2466R22T55SN	.112	.157
MS2466R24T43SN	.134	.188
MS2466R24T57SN	.133	.185
MS2466R24T61SN	.131	.181

FIGURE 4. Weights, plugs, threaded coupling type T, classes F, G and R.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configuration: See figures 1 through 4.


Connector mating: This connector mates with MS24264, MS24265, MS27034, MS27613 and MS27614. Dummy stowage receptacles for use with MS24266 include M83723/61-1 (coupling type T) and M83723/61-2 (coupling type B).

For insert arrangements and alternate insert keying position: See MIL-STD-1554.

For accessories used with this connector: See MIL-DTL-26500.

Contacts: In accordance with SAE-AS39029.

Part or Identifying Number (PIN) example:

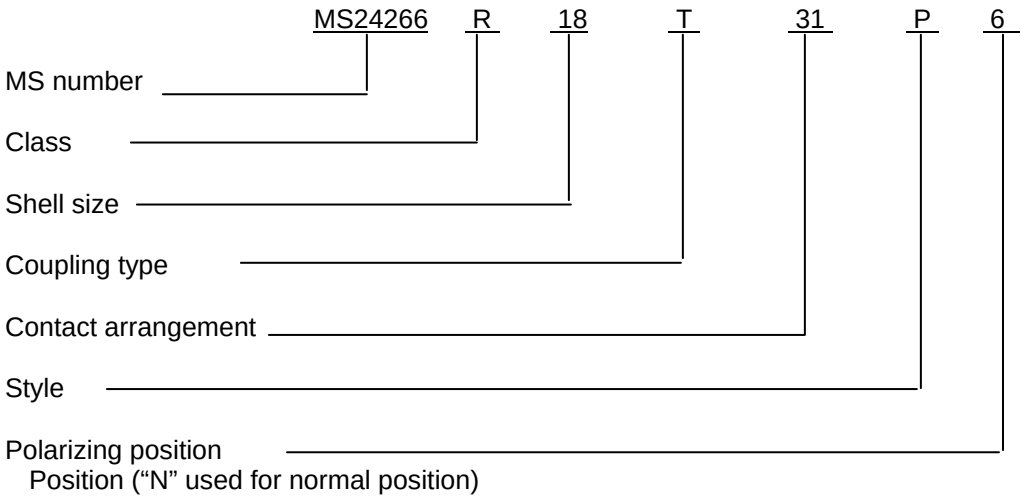

Changes from previous issue. The margins of this specification sheet are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Referenced documents. In addition to MIL-DTL-26500, this document references the following:

MIL-DTL-83723
MIL-I-81969/17
MIL-I-81969/19
MIL-STD-1554
MS24264
MS24265
MS27034
MS27613
MS27614
SAE-AS39029

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – AV
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935-2015-180)

Review activities:
Army - MI
Air Force – 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.