FED. SUP CLASS
5940

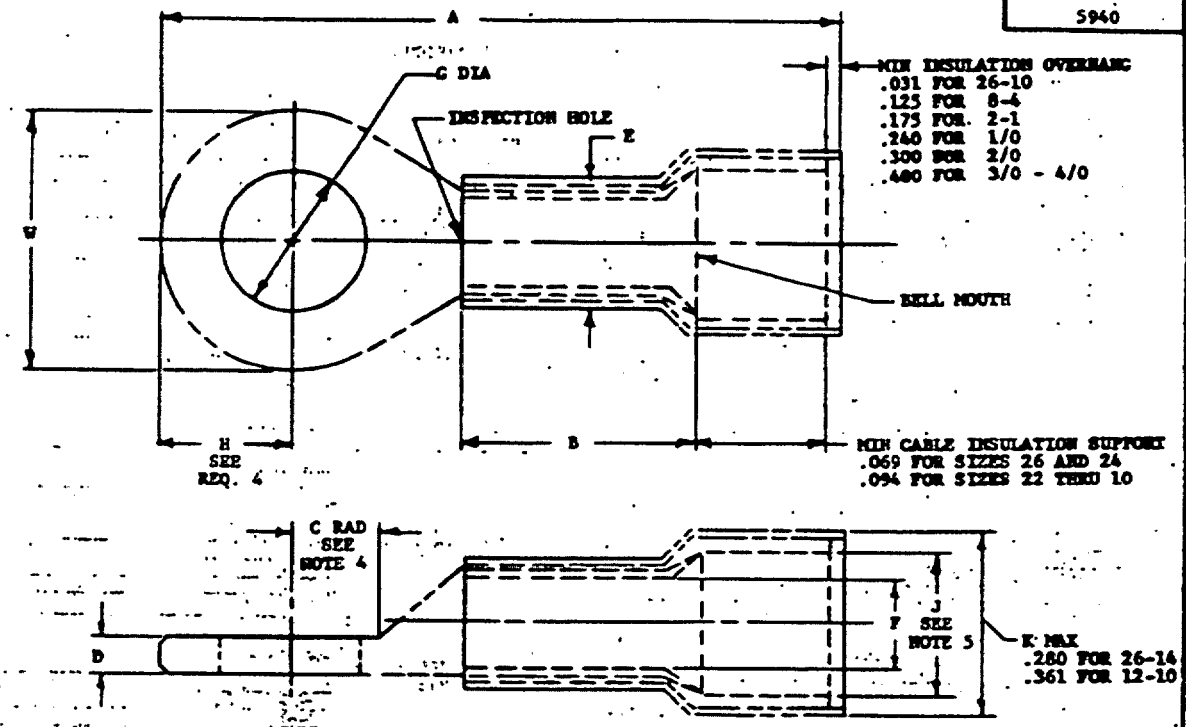


TABLE I. METRIC CONVERSIONS

INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm	INCH	mm
.022	0.56	.133	3.38	.260	6.73	.410	10.19	.598	15.19	.865	21.97
.027	0.69	.138	3.51	.275	6.99	.418	10.62	.605	15.37	.887	22.53
.028	0.71	.139	3.53	.276	7.01	.425	10.80	.610	15.49	.890	22.61
.037	0.94	.140	3.56	.280	7.11	.430	10.90	.620	15.75	.903	22.94
.031	0.78	.142	3.61	.290	7.37	.435	11.05	.622	15.80	.910	23.11
.033	0.84	.150	3.81	.296	7.52	.437	11.10	.623	15.82	.913	23.19
.035	0.89	.152	3.86	.300	7.62	.438	11.13	.625	15.88	.930	23.62
.037	0.94	.153	3.89	.302	7.67	.450	11.43	.630	16.00	.955	24.26
.038	0.97	.156	3.96	.305	7.75	.453	11.51	.645	16.28	.956	24.28
.043	1.09	.160	4.06	.308	7.82	.458	11.63	.648	16.46	1.000	25.40
.047	1.19	.164	4.17	.310	7.87	.460	11.68	.668	16.97	1.010	25.65
.052	1.32	.168	4.27	.3125	7.94	.473	12.01	.680	17.27	1.053	26.75
.054	1.37	.171	4.34	.315	8.00	.478	12.14	.685	17.40	1.085	27.56
.069	1.75	.175	4.46	.317	8.05	.480	12.19	.690	17.53	1.090	27.69
.070	1.78	.176	4.47	.320	8.13	.500	12.70	.700	17.78	1.095	27.81
.073	1.85	.178	4.52	.323	8.20	.503	12.78	.705	17.91	1.120	28.45
.075	1.91	.186	4.72	.328	8.33	.505	12.83	.711	18.06	1.148	29.16
.081	2.06	.190	4.83	.330	8.38	.510	12.95	.718	18.24	1.225	31.12
.084	2.13	.193	4.90	.338	8.59	.513	13.03	.720	18.29	1.320	33.53
.085	2.16	.198	5.03	.343	8.71	.516	13.11	.729	18.52	1.322	33.58
.086	2.18	.202	5.13	.350	8.89	.520	13.21	.734	18.64	1.402	35.61
.090	2.29	.203	5.16	.355	9.02	.525	13.34	.740	18.80	1.414	35.92
.094	2.39	.208	5.28	.360	9.14	.536	13.61	.750	19.05	1.466	37.24
.095	2.41	.210	5.33	.361	9.17	.540	13.72	.755	19.18	1.544	39.22
.096	2.44	.215	5.46	.365	9.27	.547	13.89	.774	19.66	1.599	40.61
.098	2.49	.222	5.64	.370	9.40	.550	13.97	.783	19.89	1.762	44.75
.109	2.77	.227	5.77	.375	9.53	.557	14.15	.790	20.07	1.812	45.62
.112	2.84	.230	5.84	.380	9.65	.560	14.22	.802	20.37	1.879	47.73
.114	2.90	.232	5.89	.383	9.73	.565	14.35	.804	20.42	2.069	52.55
.120	3.05	.234	5.94	.385	9.78	.570	14.48	.810	20.57	2.150	54.61
.122	3.10	.238	6.05	.386	9.80	.573	14.55	.815	20.70	2.269	57.63
.125	3.18	.240	6.10	.388	9.86	.577	14.66	.840	21.34	2.370	60.20
.126	3.20	.245	6.22	.398	10.11	.580	14.73	.850	21.59	2.401	60.99
.129	3.28	.250	6.35	.400	10.16	.590	14.99	.853	21.67	2.525	64.14
		.253	6.53					.855	21.72	2.750	69.85
		.260	6.60					.860	21.84	3.000	76.20
										3.330	84.58

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER ACQUISITION DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(P) DENOTES CHANGE

APPROVED 25 MAY 53 REVISED (1) 28 FEB 74 (M) 13 JAN 81 (N) 19 FEB 86 (P) 6 DEC 86

REVIEWER SYMBOLS:
ARMY - AV, MI, AR
NAVY - EC, SH
USAF - 11, 99

USER SYMBOLS:
ARMY - AT, MR
NAVY - MC, OS
USAF

AMSC N/A
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, Defense Electronics Supply Center, ATTN: DESC-ELS, 1507 Wilmington Pike, Dayton, OH 45444-5765 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Review/user information is current as of the date of this document. For future coordination of changes to this document, draft legislation should be based on the information in the current DODISS.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - AS Other Cmd ARMY - ER USAF - 85	SEE NOTE 9	TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RING TONGUE, BELL-MOUTHED, TYPE II, CLASS 1. (FOR 105°C TOTAL CONDUCTOR TEMPERATURE)	MS25036
ACQUISITION SPECIFICATION MIL-T-7928	SUPERSEDES: MS25124 AS DWG 52A3B212		SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PROJECT NO. 5940-B037

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS 5940

TABLE II. DIMENSIONS

DASH NO.	TERMINAL SIZE	STUD SIZE	A MAX	B MIN	C MIN RAD	D MAX	D MIN	E DIA	F DIA	G DIA MAX	G DIA MIN	J MIN DIA	W MAX	W MIN	INSULATING SLEEVE COVER
143	26-24	2(.086)	.740	.126	.133	.028	.022	.215 .190	.033 .027	.098	.090	.084	.210	.133	YELLOW
144		4(.112)	.755		.171					.122	.114		.260	.193	
145		6(.138)								.152	.142				
146		8(.164)	.855		.202					.178	.168		.330	.245	
147		10(.190)	.865		.227					.203	.193				
159	22-18	2(.086)		.156	.115	.035	.027	.215 .190	.073 .052	.098	.090	.120	.230	.198	RED
148		4(.112)	.755							.122	.114			.210	
101		6(.138)	.790		.125										
102		6(.138)	.865							.152	.142		.260	.245	
149		8(.164)	.930		.202					.178	.168		.320	.305	
103		10(.190)			.234					.203	.193				
150		1/4(.250)	1.090		.265					.275	.260		.473	.450	
104		5/16(.3125)			.296					.338	.323				
105		3/8(.375)	1.320		.328					.400	.385		.540	.520	
151		1/2(.500)			.453					.525	.510		.720	.705	
152	16-14	4(.112)	.774	.156	.125	.035	.029	.240 .210	.095 .081	.122	.114	.153	.260	.240	BLUE
106		6(.138)	.815							.152	.142				
107		6(.138)	.910		.202								.317	.302	
153		8(.164)	.955							.178	.168				
108		10(.190)	.955		.234					.203	.193				
154		1/4(.250)	1.085		.265					.275	.260		.473	.450	
109		5/16(.3125)			.296					.338	.323				
110		3/8(.375)	1.225		.328					.400	.385		.540	.520	
155		1/2(.500)	1.320		.453					.525	.510		.720	.705	
111	12-10	6(.138)	1.120	.234	.202	.043	.037	.300 .275	.139 .129	.152	.142	.210	.380	.365	YELLOW
156		8(.164)								.178	.168				
112		10(.190)			.234					.203	.193				
157		1/4(.250)	1.322		.265					.275	.260		.536	.516	
113		5/16(.3125)			.296					.338	.323				
114		3/8(.375)	1.414		.328					.400	.385		.598	.573	
158		1/2(.500)			.453					.525	.510		.720	.705	
115	8	10(.190)	1.402	.315	.234	.084	.038	.350 .300	.186 .176	.203	.193	.257	.429	.386	RED
116		1/4(.250)	1.466		.265					.275	.260		.478	.435	
117		5/16(.3125)	1.544		.296					.338	.323		.590	.547	
118		3/8(.375)			.328					.400	.385				
119	6	10(.190)	1.599	.375	.238	.084	.043	.410 .360	.232 .222	.203	.193	.310	.503	.460	BLUE
120		1/4(.250)			.265					.275	.260				
121		5/16(.3125)			.296					.338	.323		.623	.580	
122		3/8(.375)	1.762		.328					.400	.385				
123	4	1/4(.250)	1.812	.437	.276	.096	.047	.500 .425	.290 .280	.275	.260	.370	.570	.480	YELLOW
124		5/16(.3125)			.308					.338	.323				
125		3/8(.375)	1.879		.328					.400	.385		.648	.605	
126	2	1/4(.250)	2.069	.505	.343	.109	.054	.560 .510	.365 .355	.275	.260	.453	.711	.668	RED
127		3/8(.375)								.400	.385				
128		1/2(.500)	2.269		.453					.525	.510		.804	.740	
129	1	1/4(.250)	2.150	.565	.383	.125	.070	.620 .540	.398 .388	.275	.260	.500	.783	.740	CLEAR TO WHITE
130		3/8(.375)								.400	.385				
131		1/2(.500)	2.370		.453					.525	.510		.887	.740	
132	0	1/4(.250)	2.401	.630	.418	.125	.070	.685 .625	.458 .438	.275	.260	.550	.853	.810	BLUE
133		3/8(.375)								.400	.385				
134		1/2(.500)	2.525		.453					.525	.510		.903	.860	
135	00	5/16(.3125)	2.750	.700	.473	.129	.075	.755 .685	.520 .500	.338	.323	.610	.956	.913	YELLOW
136		3/8(.375)								.400	.385				
137		1/2(.500)								.525	.510				
138	000	3/8(.375)	3.000	.718	.513	.140	.085	.840 .729	.577 .557	.400	.385	.680	1.053	1.010	RED
139		1/2(.500)								.525	.510				
140	0000	3/8(.375)	3.330	.734	.560	.150	.095	1.000 .802	.645 .622	.400	.385	.750	1.148	1.095	BLUE
141		1/2(.500)								.525	.510				

APPROVED 25 May 53 REVISED (P) FOR CHANGES SEE SHEET 3

"Review/order information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

REVIEWER SYMBOLS: ARMY - AV, MI, AR; NAVY - EC, SH; USAF - 11, 99

USER SYMBOLS: ARMY - AT, ME; NAVY - MC, OS; USAF -

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
NAVY - AS Other Cust ARMY - ER USAF - 85	SEE NOTE 9	TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RING TONGUE, BELL-MOUTHED, TYPE II, CLASS 1. (FOR 105°C TOTAL CONDUCTOR TEMPERATURE)	MS25036
ACQUISITION SPECIFICATION MIL-T-7928		SUPERSEDES MS25124 AS DWG 52AB212	SHEET 2 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE PLATE NO. 23055

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5940


REQUIREMENTS:

1. MATERIAL: SEE ACQUISITION SPECIFICATION.
2. INSULATION MATERIAL: SEE ACQUISITION SPECIFICATION.
3. FINISH: TIN PLATED, SEE ACQUISITION SPECIFICATION.
4. "B" MAX AND MIN DIMENSIONS SHALL BE ONE HALF OF "W" MAX AND MIN DIMENSIONS, RESPECTIVELY.
5. AVERAGE DIAMETER OF "E" AND "F" SHALL BE WITHIN SPECIFICATION DIMENSIONS: MAX AND MIN DIMENSIONS DUE TO OVALIZATION SHALL BE WITHIN 3% OF SPECIFICATION REQUIREMENTS.
6. QUALIFICATION: FOR QUALIFICATION, TERMINALS SHALL BE TESTED WITH ANY ONE OF THE FOLLOWING WIRES: MIL-W-5086: MIL-W-16878 EXCEPT /3, 8, 9 OR 10; MIL-W-22759/1, 9, 11 OR 16; AND TOOLING AS FOLLOWS: MIL-C-22520/5-01 TOOLING WITH MIL-C-22520/5-100 DIES INSTALLED FOR SIZES 26 THRU 10 TERMINALS, UR. MIL-C-22520/10-01 TOOLING WITH MIL-C-22520/10-101 DIES INSTALLED FOR SIZES 26 THRU 14 TERMINALS AND MIL-C-22520/10-100 DIES INSTALLED FOR SIZE 12 THRU 10 TERMINALS. MS23002 CRIMPING DIES TO BE USED WITH MS25441 TOOL FOR SIZE 8 THRU 4/0. ABOVE SPECIFIED TOOLS SHALL BE USED FOR QUALIFICATION TESTING. EXISTING MS90413 AND MS3316 TOOLS IN THE FIELD MAY BE USED UNTIL WORN OUT.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. REMOVE BURRS AND SHARP EDGES.
3. METRIC EQUIVALENTS (TO THE NEAREST .01 mm) ARE GIVEN FOR GENERAL INFORMATION ONLY AND ARE BASED UPON 1 INCH = 25.4 mm.
4. "C" MIN DIMENSION IS MIN WASHER CLEARANCE RAD.
5. DIMENSION "J" REPRESENTS THE MIN OPENING THAT WILL ACCEPT THE FINISHED WIRE.
6. CONTOUR INDICATED BY PHANTOM LINES MAY VARY FROM THAT SHOWN TO SUIT INDIVIDUAL MANUFACTURER'S DESIGN.
7. INSULATION SUPPORT AND TERMINAL BARREL MAY BE MULTIPLE PIECE CONSTRUCTION.
8. WIRE INSERTION SHALL BE FACILITATED BY BELL MOUTH.
9. CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT (ASCC AIR STD 12/4). WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.
10. INTERCHANGEABILITY RELATIONSHIP: PART NUMBERS MS25036-101 THRU -158 CAN REPLACE THE CANCELLED MS25036-1 THRU -58 PARTS RESPECTIVELY. THE CANCELLED MS25036-1 THRU -58 PARTS CANNOT ALWAYS REPLACE THE MS25036-101 THRU -158 PARTS.

EXAMPLE OF PART NUMBER:



APPROVED 25 MAY 93 REVISED (P) FOR CHANGES SEE SHEET 2

P.A. NAVY - AS Other Cust ARMY - ER USAF - 85	INTERNATIONAL INTEREST SEE NOTE 9	TITLE: TERMINAL, LUG, CRIMP STYLE, COPPER, INSULATED, RING TONGUE, BELL-MOUTHED, TYPE II, CLASS 1. (FOR 105 °C TOTAL CONDUCTOR TEMPERATURE)	MILITARY STANDARD MS25036
ACQUISITION SPECIFICATION MIL-T-7928		SUPERSEDES: MS25124 AS DWG 52AB212	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

PLATE NO. 27035

REVIEWER SYMBOLS: ARMY - AT, IE; NAVY - MC, OS; USAF -

REVIEWER SYMBOLS: ARMY - AV, MI, AR; NAVY - EC, SH; USAF - 11, 99

Review/use information is current as of the date of this document. For future coordination of changes to this document, draft revision should be based on the information in the current 000100.

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for retrofitting are shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:01Z
Check the source to verify that this is the current version before use.