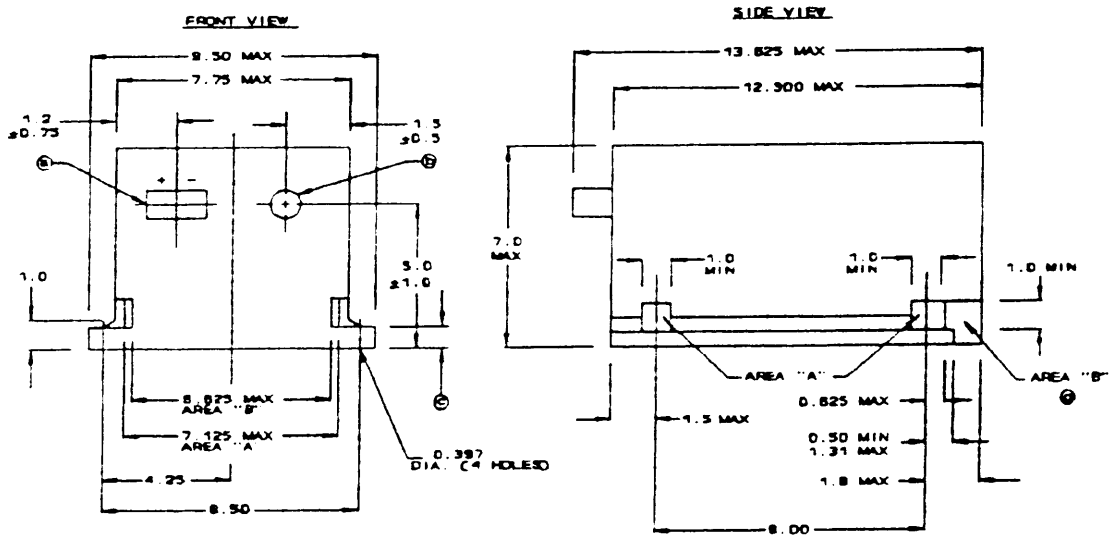


(a) Terminal board MS25044-1 placarded showing positive dc and dc ground.

(b) Receptacle to fit plug MS3106E-20-4S, MS3108E-20-4S, or MS3459W-20-4S.

(c) The unit must be constructed to provide a 1/2 inch +0.000/-0.015 thickness at the mounting holes in accordance with the clearance area "A" requirement.

(d) Clearance area "B" must be maintained to provide clearance for an alternate means of mounting. This alternate means is required where the unit is held in place by sliding the rear mounting feet area of the unit under fixed holding brackets.

MS PART NO.
MS28126-2

APPROVED 21 July 1960 REVISED (D) 14 October 1966 (E) 29 November 1968 (F) 18 November 1981

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for replacing use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 200 AMPERE CLASS A, NONREGULATED AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28126
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 1 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

AC INPUT:

Voltage Range 112.5-117.5 Volts
Frequency Range 380-420 Hertz

DC OUTPUT:

Voltage See Figure 2
Maximum Load Current 200 Amperes
Minimum Load Current 2.0 Amperes

Weight (lbs) 20.5 (Max)

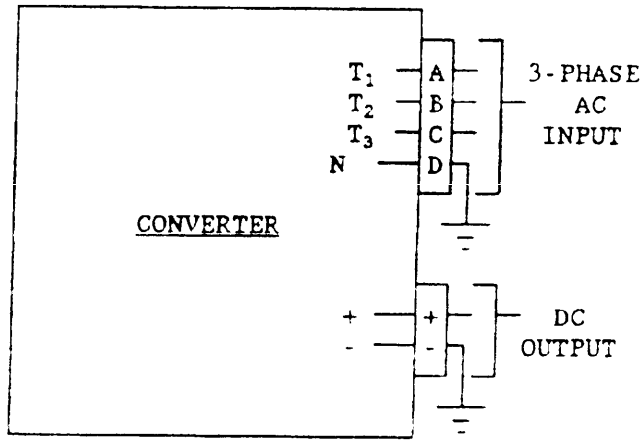



Figure 1. Connection Diagram

USER ACTIVITIES:
REVIEWER ACTIVITIES:
APPROVED 21 July 1980 REVISED (D) 14 Octot
965 (E) 29 November 1990 (F) 18 November 1991

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 200 AMPERE CLASS A, NONREGULATED AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28126
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 2 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

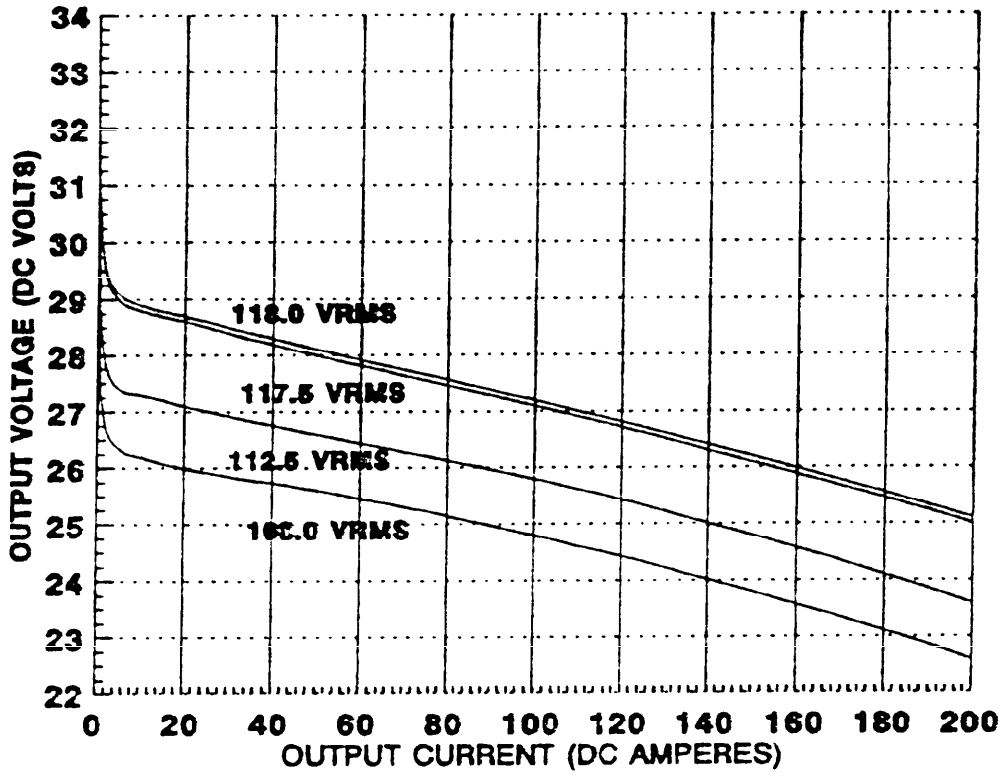

INPUT		108.0 VRMS	112.5 VRMS	117.5 VRMS	118.0 VRMS
OUTPUT	AMPS DC	MIN. VDC	MIN. VDC	MAX. VDC	MAX. VDC
	*0.0	29.8	31.1	32.8	32.9
	2.0	26.7	27.8	29.4	29.5
	10.0	26.2	27.3	28.8	28.9
	20.0	26.0	27.1	28.6	28.7
	50.0	25.6	26.6	28.0	28.1
	100.0	24.8	25.8	27.1	27.2
	150.0	23.8	24.8	26.1	26.2
	200.0	22.6	23.6	25.0	25.1

FIGURE 2. OUTPUT VOLTAGE LIMITS

* ZERO LOAD VOLTAGE READINGS FOR INFORMATION ONLY

APPROVED 21 July 1960 REVISED (D) 14 October 1965 (E) 29 November 1966 (F) 18 November 1991

USER ACTIVITIES:

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new applications and design applications and for repairing are shall be made from this document.

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 200 AMPERE CLASS A, NONREGULATED AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28126
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 3 OF 4

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6130

REQUIREMENTS:

The converter shall meet the requirements of MIL-C-7115 as modified below: (paragraph numbers refer to MIL-C-7115)

3.4.1.3.3 Color. Delete "color number 17875 (white)" of first sentence and add "color number 37038 (black)."

3.7.1.2.3 Output starting voltage. Add to second sentence: "except for the first 5 milliseconds from the onset of the transient, when a maximum voltage of 45 volts shall be allowed."

3.7.1.4.2 Type II, nonregulated converters. Add: "except the conducted emission requirements of CE03, MIL-STD-461 shall be relaxed 10 db from 150 KHz to 300 KHz for the input leads and 10 db from 1.0 MHz to 2.5 MHz for the output positive and negative leads."

3.7.1.5 Acoustical noise. Not applicable.

3.7.2.2 Acceleration. Not applicable.

3.7.2.9 Explosive Atmosphere. Not applicable.

4.7.2.2.3 Voltage regulation at minimum temperature-altitude conditions. Delete "-30°C" and replace with "-55°C".

4.7.2.15 Acoustical noise. Not applicable.

4.7.2.18 Acceleration. Not applicable.

4.7.2.25 Explosive atmosphere. Not applicable.

NOTES:

1. Dimensions are in inches. Tolerance is ± 0.015 unless otherwise specified.

2. The complete requirements for procuring the converter described herein shall consist of this document and the latest issue of MIL-C-7115.

APPROVED 21 July 1980 REVISED (D) 14 Octob. 006 (E) 28 November 1980 (F) 18 November 1981

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for replacements are shall be made from this document.

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 200 AMPERE CLASS A, NONREGULATED AIRCRAFT, FAN COOLED	MILITARY STANDARD MS28126
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 4 OF 4

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:58Z
Check the source to verify that this is the current version before use.