NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

CUSTODIANS: Navy-Bu&Ser, Air Force

OTHER INT.: A - M - AF -

PROCUREMENT SPECIFICATION: MIL-A-5572R


SUPERSEDES:

MILITARY STANDARD

ADAPTER, PRESSURE FUEL SERVICING, TYPES A-1 AND A-6

MS29515 (ASG)

SHEET 1 OF 2 (B)

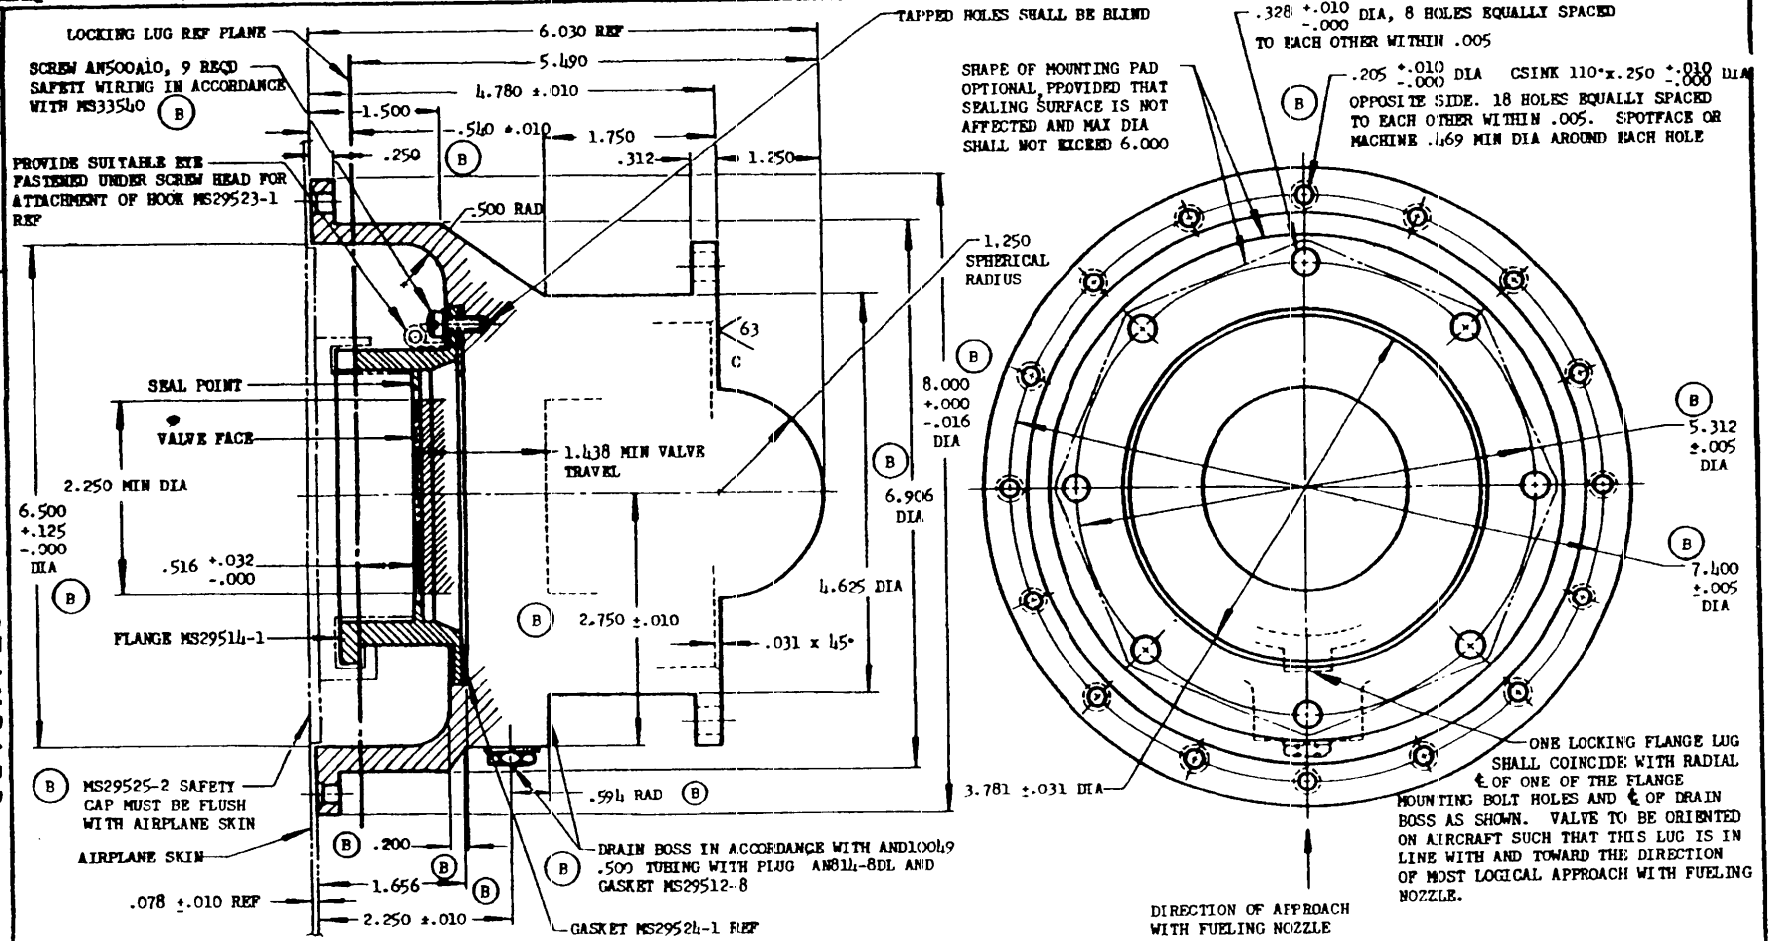

(B)

MS PART NO.	FIIN	TYPE	WEIGHT LB MAX
(a)MS29515-1		A-1	5

(a) INACTIVE FOR DESIGN AFTER 29 MAY 1953.
FOR DEFINITION AND APPLICATION OF DRAWING STATUS NOTES, SEE ANA BULLETIN NO. 337.
THE VALVE FACE SHALL BE FLAT WITHIN 2.250 MIN DIA AND NO PORTION OF THE VALVE SHALL EXTEND BELOW THIS FACE. CONFIGURATION OF THE VALVE ABOVE THIS FACE IS OPTIONAL.
THE VALVE SHALL BE SPRING LOADED. LOADING AT 1.438 INCHES TRAVEL SHALL NOT EXCEED 50 POUNDS.
ADEQUATE ROOM MUST BE PROVIDED BETWEEN ADAPTER AND SAFETY CAP WHEN CLOSED, TO ACCOMMODATE SAFETY CAP CHAIN.
THIS OUTLINE REPRESENTS THE MAXIMUM ENVELOPE OF THE ADAPTER ASSEMBLY UNLESS OTHERWISE SPECIFIED.
REMOVE ALL BURRS AND SHARP EDGES .016 MAX RAD.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±2°.
(B) FOR SURFACE ROUGHNESS SEE STANDARD MIL-STD 10.
THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

(B) SHEET 2 ADDED

FED SUP CLASS 4730

APPROVED 29 May 53 REVISED (A) 10 Jan 55 (B) 12 Jun 56

Source: https://assist.dla.mil -- Downloaded: 20240-23T17:01Z
Check the source to verify that this is the current version before use.

NOTICE: When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility, nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.


CUSTODIANS
Navy - BuAer
Air Force

OTHER INT.
A -
N -
AF -

MILITARY STANDARD

ADAPTER, PRESSURE FUEL SERVICING, TYPE A-3, AND A-6

MS29515 (ASG)

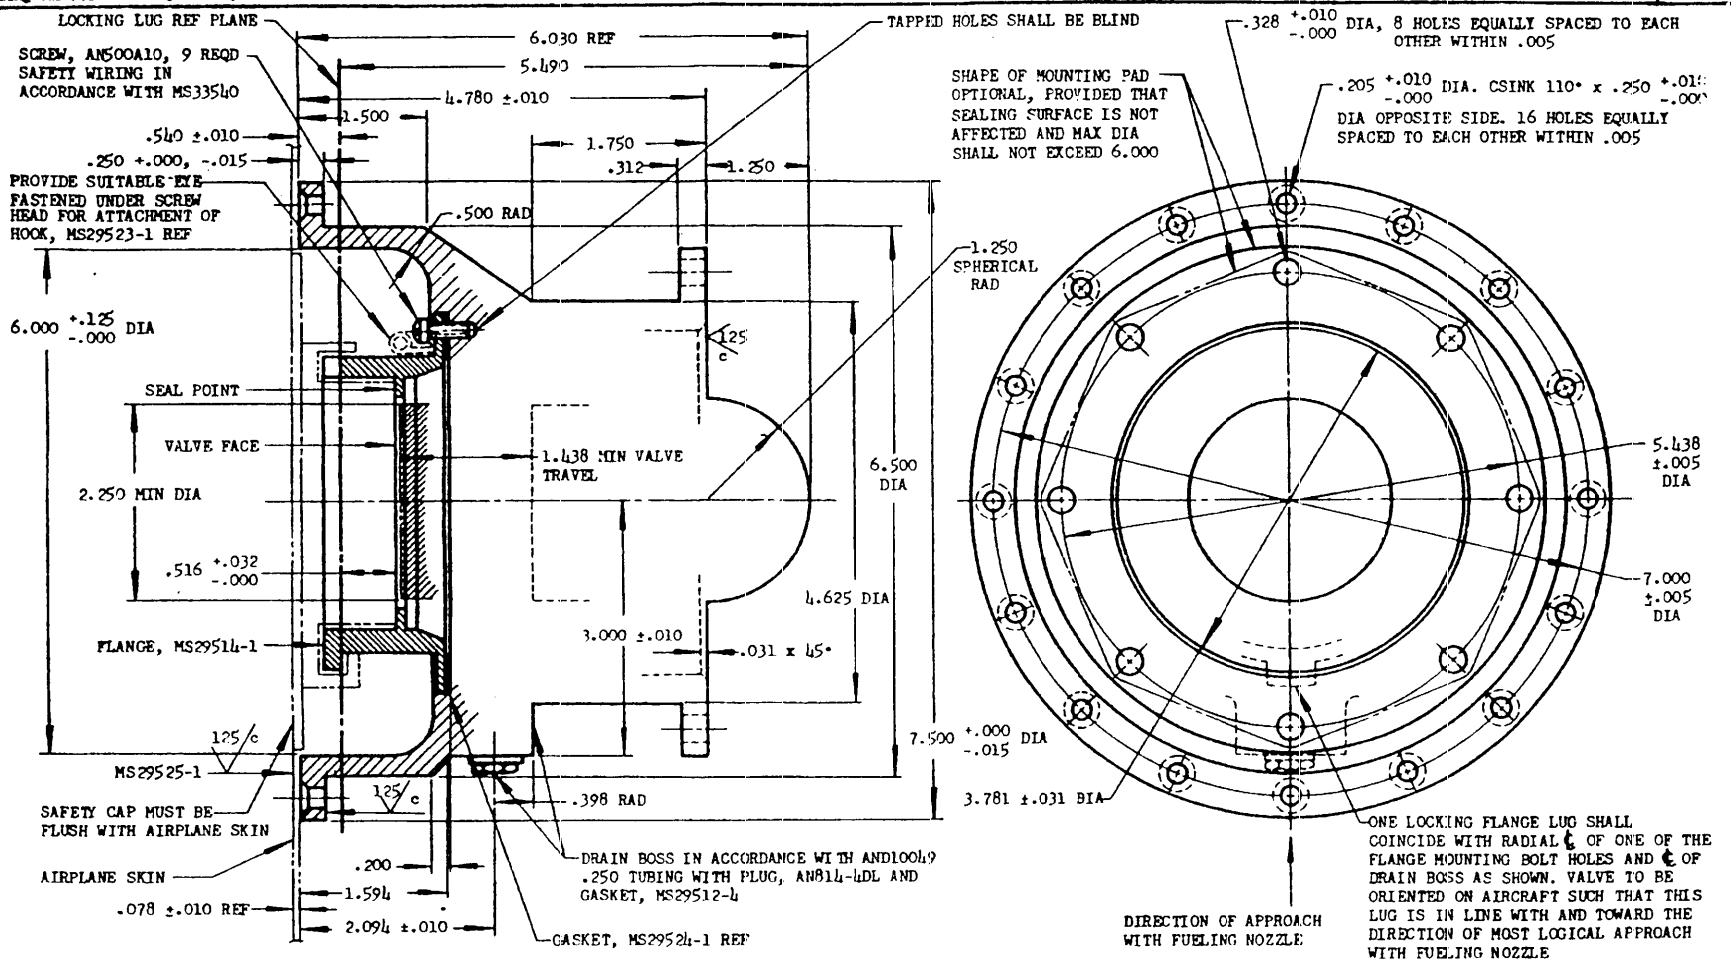

THE VALVE FACE SHALL BE FLAT WITHIN 2.250 MIN DIA AND NO PORTION OF VALVE SHALL EXTEND BELOW THIS FACE. CONFIGURATION OF THE VALVE ABOVE THIS FACE IS OPTIONAL.
THE VALVE SHALL BE SPRING LOADED. LOADING AT 1.438 INCHES TRAVEL SHALL NOT EXCEED 50 POUNDS.

ADEQUATE ROOM MUST BE PROVIDED BETWEEN ADAPTER AND SAFETY CAP WHEN CLOSED TO ACCOMODATE SAFETY CAP CHAIN.
THIS OUTLINE REPRESENTS THE MAXIMUM ENVELOPE OF THE ADAPTER ASSEMBLY UNLESS OTHERWISE SPECIFIED.

REMOVE ALL BURRS AND SHARP EDGES .016 MAX RAD.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: ANGLES ±2°.

FOR SURFACE ROUGHNESS, SEE STANDARD MIL-STD-10.

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN.
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
THIS DOCUMENT HAS BEEN PROMULGATED BY THE DEPARTMENT OF DEFENSE AS THE MILITARY STANDARD TO LIMIT THE SELECTION OF THE ITEM, PRODUCT, OR DESIGN COVERED HEREIN IN ENGINEERING, DESIGN, AND PROCUREMENT. THIS STANDARD SHALL BECOME EFFECTIVE NOT LATER THAN 90 DAYS AFTER THE LATEST DATE OF APPROVAL SHOWN.

MS PART NO.	FIIN	TYPE	WEIGHT LB MAX
MS29515-2		A-6	5

FED. SUP CLASS 4730

APPROVED 12 Jun 56 **REVISED**

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T17:01Z
Check the source to verify that this is the current version before use.