
FED. SUP CLASS
5935

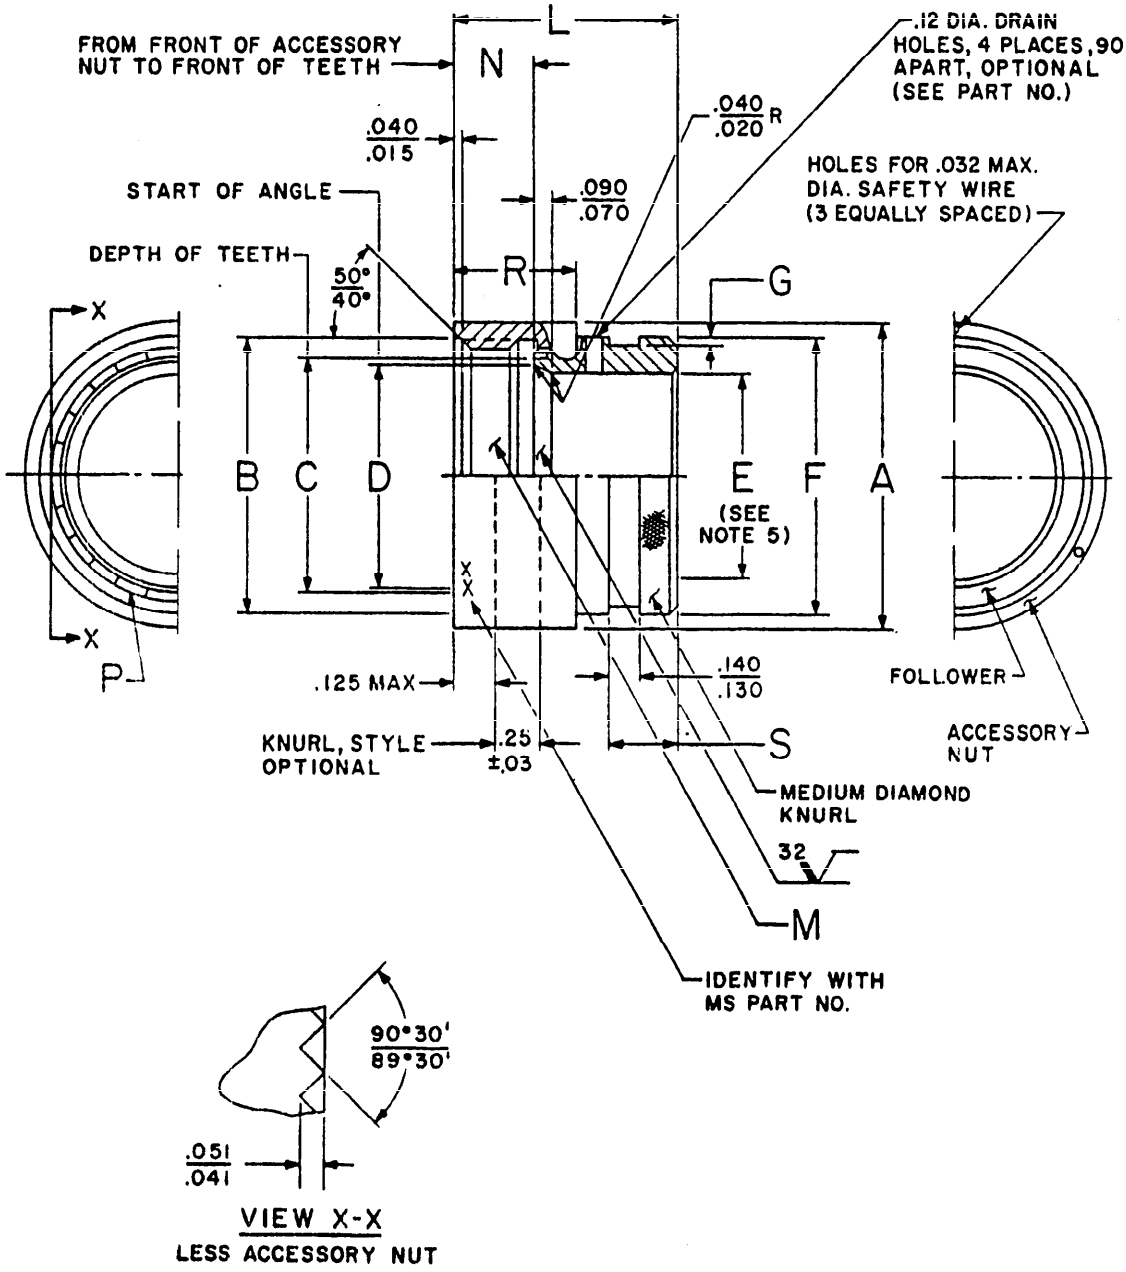

VIEW X-X
LESS ACCESSORY NUT

FOR DESIGN FEATURE PURPOSES. THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

© INACTIVE FOR DESIGN AFTER 1 JULY 1982. DOCUMENT WILL BE CANCELLED AFTER 1 JULY 1984, USE MIL-C-85049/60.

© DENOTES CHANGES

P.A. NAVY - AS Other Cust	TITLE BACKSHELLS, HEAT-SHRINKABLE BOOT, FOR ELECTRIC CONNECTORS	MILITARY STANDARD MS 3158 (NAVY)
PROCUREMENT SPECIFICATION MIL-C-5015	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23071

PROJECT NO. 5935-N203-01

REVIEW ACTIVITIES:
NAVY - EC

APPROVED 18 OCT 71 REVISED Ⓐ 5 APRIL 1972 Ⓑ 27 April 1977 © 10 May 1982

This military standard is approved for use by NAVAL AIR SYSTEMS COMMAND, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

DASH NUMBER	FOR CONNECTOR SHELL SIZE (REF) MIL-C-81703 SERIES 3	MIL-C-26482 SERIES 2	MIL-C-5015 CRIMP	A DIA. MAX.	B +.025 -.000 DIA.	C +.000 -.015 DIA.	D +.015 -.000 DIA.	F +.000 -.015 DIA.
-3	3			.669	.562	.431	.370	.533
-8		8	8S	.617	.500	.360	.299	.533
-10		10	10S,10SL	.734	.625	.494	.433	.605
-12	7	12	12S & 12	.858	.750	.610	.549	.774
-14	12	14	14S & 14	.984	.875	.735	.674	.838
-16	19	16	16S & 16	1.112	1.000	.860	.799	.963
-18	27	18	18	1.218	1.062	.916	.869	1.042
-20	37	20	20	1.345	1.188	1.041	.994	1.217
-22		22	22	1.468	1.312	1.166	1.119	1.355
-24		24	24	1.593	1.438	1.291	1.244	1.443
-28			28	1.969	1.750	1.512	1.469	1.709
-32			32	2.219	2.000	1.762	1.715	1.919
-36			36	2.469	2.250	1.977	1.930	2.169
-40			40	2.719	2.500	2.192	2.145	2.402
-44			44	2.969	2.750	2.447	2.400	2.657
-48			48	3.219	3.000	2.697	2.650	2.907
-61	61			1.653	1.500	1.354	1.307	1.529

DASH NUMBER	G +.008 -.000	L MAX.	M R. B. THREAD CLASS 2B	N +.000 -.022	P NUMBER OF TEETH	S MAX.	R +.000 -.062
-3	.044	1.125	.562 - 24UNEF	.305	15	.425	.540
-8	.044	1.125	.500 - 20UNF	.305	12	.425	.540
-10	.044	1.125	.625 - 24UNEF	.305	15	.425	.540
-12	.044	1.125	.750 - 20UNEF	.305	21	.425	.540
-14	.044	1.125	.875 - 20UNEF	.305	24	.425	.540
-16	.044	1.125	1.000 - 20UNEF	.305	30	.425	.540
-18	.044	1.125	1.062 - 18UNEF	.305	33	.425	.540
-20	.069	1.125	1.188 - 18UNEF	.305	36	.425	.540
-22	.069	1.125	1.312 - 18UNEF	.305	39	.425	.540
-24	.069	1.125	1.438 - 18UNEF	.305	42	.425	.540
-28	.069	1.287	1.750 - 18UNS	.467	54	.425	.702
-32	.086	1.449	2.000 - 18UNS	.467	63	.587	.702
-36	.086	1.449	2.250 - 18UNS	.467	72	.587	.702
-40	.086	1.449	2.500 - 18UNS	.467	81	.587	.702
-44	.086	1.449	2.750 - 16UN	.467	87	.587	.702
-48	.086	1.449	3.000 - 16UN	.467	96	.587	.702
-61	.069	1.125	1.500 - 18UNEF	.305	45	.425	.540

REVIEW ACTIVITIES:
NAVY - EC

APPROVED 18 OCT 71 REVISED © FOR CHANGES SEE SHEET 1

The military standard is approved for use by NAVAL AIR SYSTEMS COMMAND, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

P.A. NAVY - AS
Other Cust

TITLE
BACKSHELLS, HEAT-SHRINKABLE BOOT, FOR ELECTRIC CONNECTORS

MILITARY STANDARD
MS3158(NAVY)

PROCUREMENT SPECIFICATION
MIL-C-5015

SUPERSEDES:

SHEET 2 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination)

PREVIOUS EDITION OF THIS FORM ARE OBSOLETE.

PLATE NO. 22071

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES, TOLERANCES: .XX = ± .01; XXX = ± .005; ANGULAR: X° = ± 1° 00'; X° XX' = ± 0° 30'.

2. COMPLETE BACKSHELL CONSISTS OF AN ACCESSORY NUT AND FOLLOWER. THE ACCESSORY NUT SHALL BE CAPTIVATED TO, AND FREE TO ROTATE ON THE FOLLOWER.

3. MATERIAL: ALUMINUM ALLOY

4. FINISH:

   C - CADMIUM PLATE, PER QQ-P-416. TYPE II, CLASS 3; COLOR - DULL OLIVE DRAB (ELECTRICALLY CONDUCTIVE).

   N - ELECTROLESS NICKEL, PER MIL-C-26074, CLASS 3 OR 4, GRADE B.

5. THIS REAR ACCESSORY SHALL CONFORM TO MS3155 (DESIGN STANDARD). MS3155 TAKES PRECEDENCE OVER THIS STANDARD.

6. QUALIFICATION: THREE TYPICAL SAMPLES (ALL DIFFERENT DASH NUMBERS) SHALL BE TESTED FOR THE FOLLOWING IN THE SEQUENCE SHOWN:

   A. EXAMINATION OF PRODUCT.

   B. MAGNETIC PERMEABILITY -
      THE RELATIVE MAGNETIC PERMEABILITY SHALL BE LESS THAN 2.0 WHEN CHECKED WITH AN INDICATOR CONFORMING TO MIL-I-17214. WIRED ASSEMBLIES SHALL NOT BE CARRYING CURRENT.

   C. CORROSION -
      SALT SPRAY TEST IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344, CONDITION B. THE SALT CONCENTRATION SHALL BE FIVE PERCENT.

   D. VIBRATION -
      IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344, TEST CONDITION II AND TEST CONDITION III.

   E. SHOCK -
      APPROXIMATELY 1/2 SINE WAVE TRANSIENT SHOCK IMPULSES OF 50 GRAVITY UNITS, AND A DURATION OF 11 ± 1 MILLISECONDS. ONE SHOCK SHALL BE APPLIED IN EACH DIRECTION OF THE THREE MAJOR AXES OF THE ASSEMBLY.

   F. POST EXAMINATION OF PRODUCT

   OTHER DASH NUMBERS WILL BE QUALIFIED BY SIMILARITY WITH SAMPLES FURNISHED TO THE QUALIFYING ACTIVITY.

7. QUALITY ASSURANCE:

   A. EXAMINATION OF PRODUCT

EXAMPLE OF PART NUMBER: MS3158-22CD

- BASIC PART NUMBER
- DASH NUMBER
- FINISH (SEE NOTE 4)
- DRAIN HOLE OPTION (OMIT IF NOT REQUIRED)

REVIEW ACTIVITIES:
NAVY - EC

APPROVED 18 OCT 71 REVISED © FOR CHANGES SEE SHEET 1

P.A. NAVY - AS Other Cust	TITLE BACKSHELLS, HEAT-SHRINKABLE BOOT, FOR ELECTRIC CONNECTORS	MILITARY STANDARD MS3158(NAVY)
PROCUREMENT SPECIFICATION MIL-C-5015	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. PLATE NO. 23071

This military standard is approved for use by NAVAL AIR SYSTEMS COMMAND, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:00Z
Check the source to verify that this is the current version before use.