

FED. SUP. CLASS
59 5

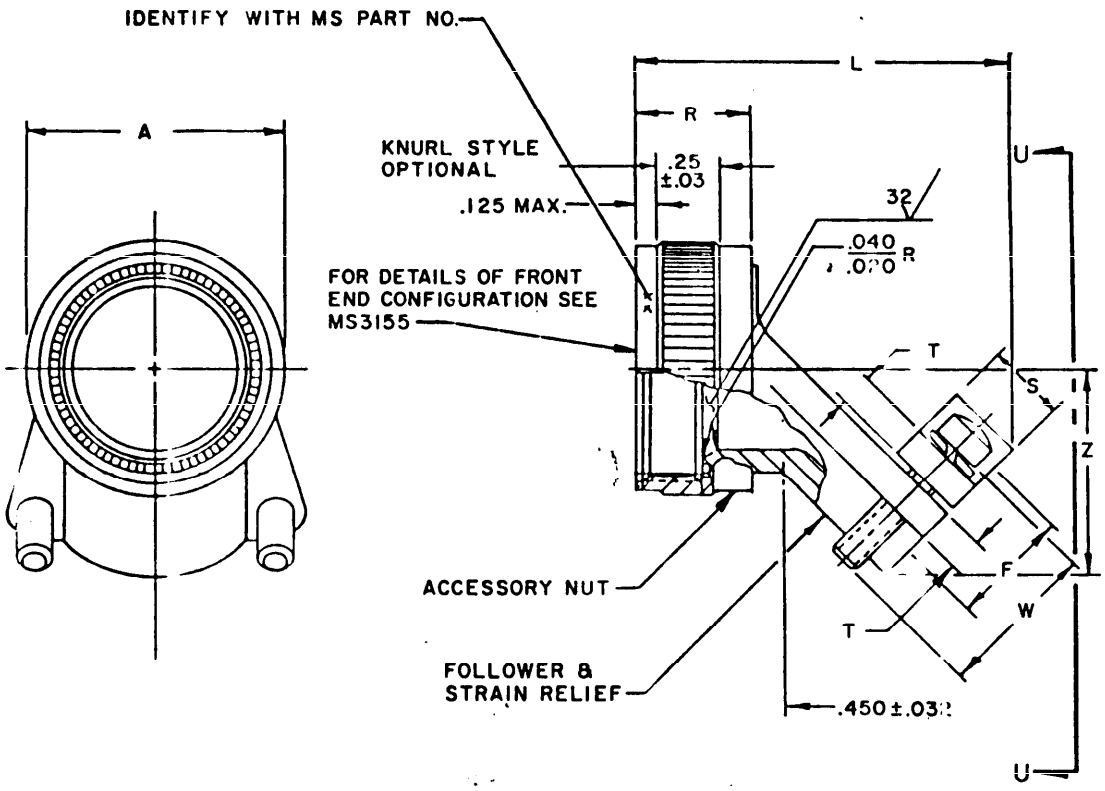

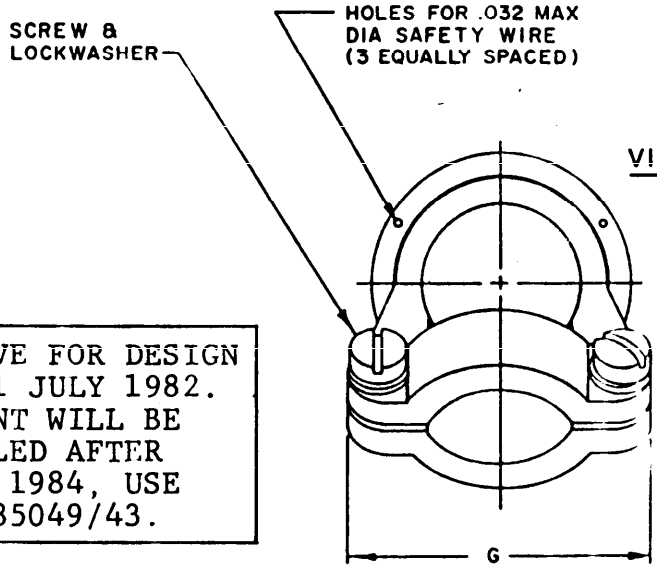

Ⓑ

INACTIVE FOR DESIGN AFTER 1 JULY 1982. DOCUMENT WILL BE CANCELLED AFTER 1 JULY 1984, USE MIL-C-85049/43.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATION FOR BID.

Ⓑ DENOTES CHANGES

APPROVED 10 DEC 1974 REVISED Ⓐ 20 MAY 1977 Ⓑ 10 May 1982

This military standard is approved by NAVAL AIR SYSTEMS COMMAND, Department of the Navy and shall be used by that activity. All other military activities are required to comply with standard when suitable.

P.A. NAVY - AS Other Cost	TITLE CLAMPS, STRAIN RELIEF, 45°, FOR ELECTRIC CONNECTORS	MILITARY STANDARD MS3415 (NAVY)
PROCUREMENT SPECIFICATION MIL-C-5015	SUPERSEDES:	SHEET 1 OF 3

DD FORM 1 MAR 72 672-1 (Limited coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 22071

PROJECT NO. 5935-N203-06

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:04Z
Check the source to verify that this is the current version before use.

DASH NUMBER	FOR CONNECTOR SHELL, SIZE (REF) MIL-C-81703 SERIES 3	MIL-C-26482 SERIES 2	MIL-C-5015 CRIMP	MIL-C-83723 SERIES I AND III	A +.000 -.045 DIA.	F CABLE ENTRY OPEN	F CABLE ENTRY CLOSED	G ±.020
-3	3				.669	.204	.125	.732
-8		8	8S	8	.617	.204	.125	.732
-10		10	10S & 10SL	10	.734	.286	.187	.812
-12	7	12	12S & 12	12	.858	.416	.291	.968
-14	12,	14	14S & 14	14	.984	.476	.351	1.026
-16	19	16	16S & 16	16	1.112	.625	.501	1.299
-18	27	18	18	18	1.218	.706	.518	1.411
-20	37	20	20	20	1.345	.831	.581	1.537
-22		22	22	22	1.468	.956	.644	1.663
-24		24	24	24	1.593	1.081	.706	1.755
-28			28		1.969	1.187	.750	2.000
-32			32		2.219	1.250	.875	2.366
-36			36		2.469	1.375	.938	2.476
-40			40		2.719	1.500	.938	2.546
-44			44		2.969	1.750	1.188	2.840
-48			48		3.219	1.875	1.317	3.324
-61	61				1.653	1.081	.706	1.755

DASH NUMBER	L MAX CLOSED	R +.000 -.062	S ±.020	T ±.015	W +.032 SCREW LENGTH	SCREW SIZE	Z MAX.
-3	1.[illegible]0	.540	.250	.125	.375	6-32	.772
-8	1.4[illegible]0	.540	.250	.125	.375	6-32	.772
-10	1.5[illegible]	.540	.250	.125	.438	6-32	.803
-12	1.603	.540	.250	.125	.500	6-32	.866
-14	1.6[illegible]0	.540	.250	.125	.500	6-32	.928
-16	1.7[illegible]6	.540	.250	.125	.625	6-32	.991
-18	1.874	.540	.375	.156	.750	8-32	1.110
-20	1.918	.540	.375	.156	.875	8-32	1.172
-22	1.962	.540	.375	.156	1.000	8-32	1.235
-24	2.006	.540	.375	.156	1.125	8-32	1.297
-28	2.301	.702	.500	.188	1.250	8-32	1.543
-32	2.389	.702	.500	.188	1.250	1/4-20	1.668
-36	2.433	.702	.500	.188	1.375	1/4-20	1.793
-40	2.434	.702	.500	.188	1.500	1/4-20	1.918
-44	2.700	.702	.625	.188	1.750	1/4-20	2.132
-48	2.788	.702	.625	.188	1.875	1/4-20	2.257
-61	2.006	.540	.375	.156	1.125	8-32	1.204

APPROVED 10 DEC 1974 REVISED (8) FOR CHANGES SEE SHEET 1

Department of the Navy and should be used by that activity. All other military activities are required to [illegible] standard sheets.

P.A. NAVY - AS
Other Cust

TITLE
CLAMPS, STRAIN RELIEF, 45°, FOR ELECTRIC CONNECTORS

MILITARY STANDARD
MS3415 (NAVY)

PROCUREMENT SPECIFICATION
MIL-C-5015

SUPERSEDES:

SHEET 2 OF 3

DD FORM 1 MAR 72 672 1 (Allied coordination)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 7-171


Source: https://assist.dla.mil -- Downloaded: 202640-23T13:04Z
Check the source to verify that this is the current version before use.

NOTES:

1. UNLESS OTHERWISE SPECIFIED, DIMENSIONS IN INCHES.
2. COMPLETE BACKSHELL CONSISTS OF AN ACCESSORY NUT AND FOLLOWER. THE ACCESSORY NUT SHALL BE CAPTIVATED TO, AND FREE TO ROTATE ON THE FOLLOWER.
3. MATERIAL: ALUMINUM ALLOY.
4. FINISH:
   A-CADMIUM PLATE, PER QQ-P-416, TYPE II, CLASS 3, OVER NICKEL. COLOR-OLIVE DRAB (ELECTRICALLY CONDUCTIVE).
   C-CADMIUM PLATE, PER QQ-P-416, TYPE II, CLASS 3; COLOR-DULL OLIVE DRAB (ELECTRICALLY CONDUCTIVE)
   N-ELECTROLESS NICKEL, PER MIL-C-26074, CLASS 3 OR 4, GRADE B.
5. THIS CLAMP WILL NOT ACCOMMODATE CONNECTORS USING SIZE 8, 4 AND 0 CONTACTS.
6. THIS REAR ACCESSORY SHALL CONFORM TO MS3155 (DESIGN STANDARD). MS3155 TAKES PRECEDENCE OVER THIS STANDARD.
7. QUALIFICATION: ONE SAMPLE OF EACH SIZE FOR WHICH QUALIFICATION IS DESIRED SHALL BE TESTED. EACH SAMPLE SHALL BE ASSEMBLED TO A QUALIFIED CONNECTOR OR A CONNECTOR UNDERGOING QUALIFICATION. THE CONNECTOR INSERT ARRANGEMENT SHALL BE OF THE MAXIMUM NUMBER OF CONTACTS, USING THE APPROPRIATE WIRE SIZE APPROACHING THE MINIMUM WIRE DIAMETER. DUMMY CONNECTORS, DUPLICATING CRIMP CONTACT CONNECTOR ACCESSORY INTERFACING FEATURES, MAY BE USED IN LIEU OF ACTUAL CONNECTORS. TESTING SHALL BE AS FOLLOWS AND SHALL BE PERFORMED IN THE SEQUENCE LISTED:
   A. EXAMINATION OF PRODUCT.
   B. MAGNETIC PERMEABILITY-
      THE RELATIVE MAGNETIC PERMEABILITY SHALL BE LESS THAN 2.0 WHEN CHECKED WITH AN INDICATOR CONFORMING TO MIL-I-17214. WIRED ASSEMBLIES SHALL NOT BE CARRYING CURRENT.
   C. SHELL CONDUCTIVITY-
      MATED ASSEMBLIES SHALL BE ELECTRICALLY CONDUCTIVE FROM THE PLUG ACCESSORY TO THE RECEPTACLE FLANGE OR ACCESSORY ON A CABLE CONNECTING RECEPTACLE. THE OVERALL D.C. RESISTANCE SHALL NOT EXCEED 0.005 OHMS FOR FINISH N AND 0.05 OHMS FOR ALL OTHER FINISHES WHEN MEASURED BY THE VOLTMETER-AMMETER METHOD. THE APPLIED POTENTIAL SHALL BE 1-1/2 VOLTS D.C. MAXIMUM. A RESISTANCE SHALL BE INSERTED IN THE CIRCUIT TO LIMIT THE CURRENT TO .100 ± .010 AMPERES.
   D. VIBRATION-
      IN ACCORDANCE WITH METHOD 2005 OF MIL-STD-1344. TEST CONDITION II AND TEST CONDITION III.
   E. SHOCK-
      APPROXIMATELY 1/2 SINE WAVE TRANSIENT SHOCK IMPULSES OF 50 GRAVITY UNITS, AND A DURATION OF 11 + 1 MILLISECONDS. ONE SHOCK SHALL BE APPLIED IN EACH DIRECTION OF THE THREE MAJOR AXES OF THE ASSEMBLY.
   F. MOISTURE RESISTANCE-
      THE MATED ASSEMBLY SHALL BE MOUNTED HORIZONTALLY WITH THE WIRE DESCENDING INTO THE BACKSHELL WITH NO DRIP LOOPS OR SPLICES WITHIN THE CHAMBER. THE WIRE SHALL LEAVE THE CHAMBER THROUGH VAPOR-TIGHT SEALS. THE TEST SHALL BE IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202, (EXCEPT VIBRATION).
   G. CORROSION-
      SALT SPRAY TEST IN ACCORDANCE WITH METHOD 1001 OF MIL-STD-1344, CONDITION B, THE SALT CONCENTRATION SHALL BE FIVE PERCENT.
   H. POST EXAMINATION OF PRODUCT.

   OTHER DASH NUMBERS WILL BE QUALIFIED BY SIMILARITY WITH SAMPLES FURNISHED TO THE QUALIFYING ACTIVITY.
8. QUALITY ASSURANCE:
   A. EXAMINATION OF PRODUCT.

EXAMPLE OF PART NUMBER: MS3415-22C

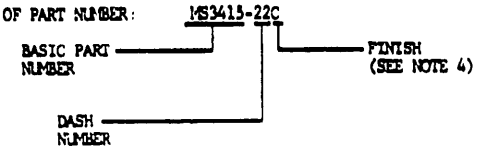

APPROVED 10 DEC 1974 REVISED (B) FOR CHANGES SEE SHEET 1

This military standard is approved by Naval Air Systems Command, Department of the Navy and shall be used by that activity. All other military activities are required to comply with standard when cited.

P.A. NAVY - AS Other Cust	TITLE CLAMPS, STRAIN RELIEF, 45°, FOR ELECTRIC CONNECTORS	MILITARY STANDARD MS3415 (NAVY)
PROCUREMENT SPECIFICATION MIL-C-5015	SUPERSEDES:	SHEET 3 OF 3

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:04Z
Check the source to verify that this is the current version before use.