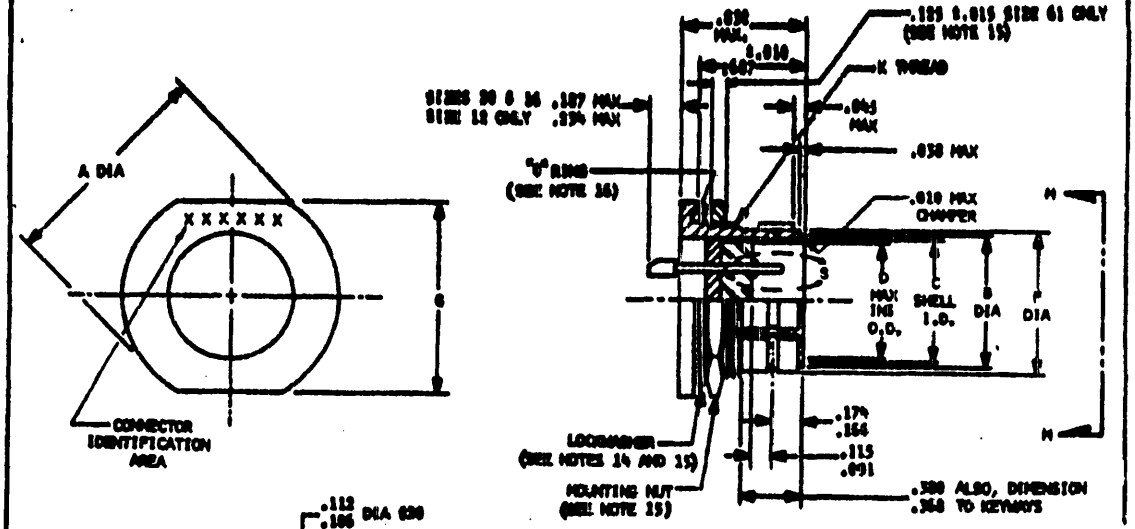
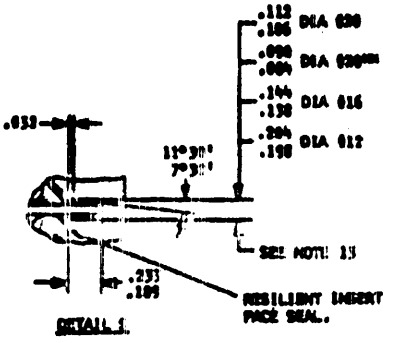
FED. SUP CLASS
5935






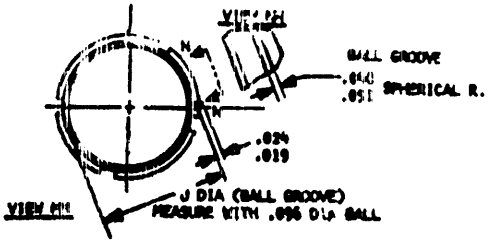


FIGURE 1
CONNECTOR VIEW



PANEL CUTOUT

ALL OUTER NON CONTACTS OF INSERT ARRANGEMENT INDICATED IN CHART.

PART NUMBER EXAMPLE:

MS3469 H 7 - 50 P 8

- MS NUMBER
- CLASS
- SHELL SIZE
- INSERT ARRANGEMENT
- CONTACT STYLE (P=PIN)
- ALTERNATE INSERT POSITION

INSERT ARRANGEMENTS REQUIRING REDUCED DIAMETERS FOR PIN CONTACT RAISED SEAL BARRIERS.		
SHELL SIZE	INSERT ARRANGEMENTS	CONTACT CAVITIES
12	12-50	5,6,8,9,11,AND 12

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS 3469(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 1 OF 4

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5935-N668-13

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 20260-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935


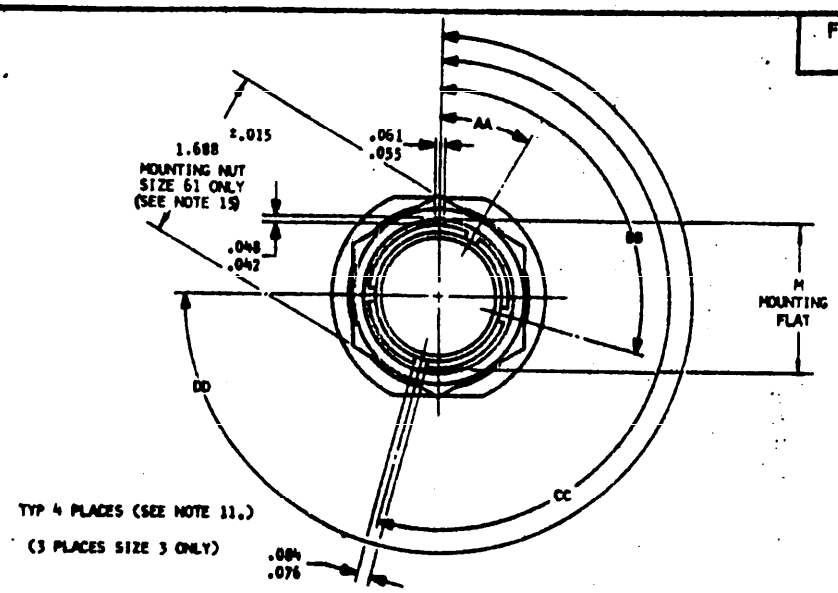



FIGURE II
KEYWAY POSITIONS

TERMINATION END OF CONTACTS

ENGAGING END OF CONTACTS

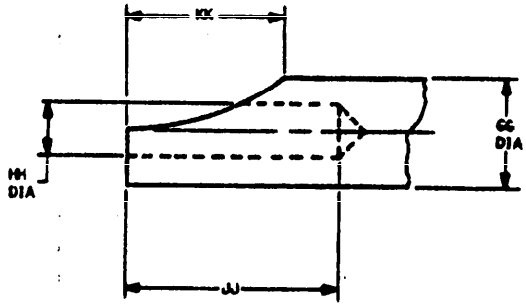

SOLDERPOT

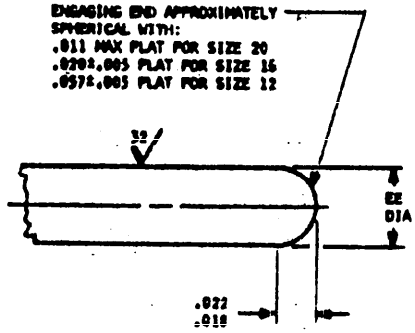

SIZE 20 ENGAGING END
(OPTIONAL)



FIGURE IV
MAX. PANEL THICKNESS (TYP)

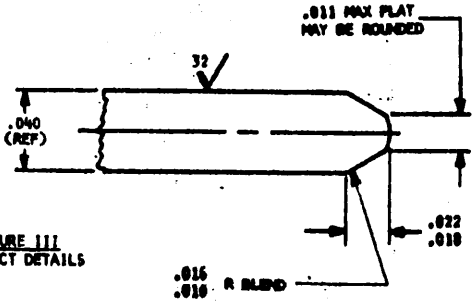


FIGURE III
CONTACT DETAILS

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

P.A. NAVY-AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS 3469(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 2

DD FORM 10 APR 64 672

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

TABLE I
CONNECTOR DIMENSIONS AND WEIGHTS

SHELL SIZE	A	B	C	D	F	G	J	K THREAD	L	M °	N
3	.780 .750	.392 .388	.387 .336	.330	.641 .631	.742 .712	.398 .391	5/16-36 UNEF-2A	.377 .347	.523	.538 .534
7	.905 .875	.527 .520	.483 .473	.431	.576 .566	.867 .837	.534 .526	11/16-24 UNEF-2A	.701 .691	.655	.685 .661
12	1.030 1.000	.661 .654	.624 .614	.555	.710 .700	.992 .962	.669 .661	13/16-20 UNEF-2A	.826 .816	.778	.788 .784
19	1.218 1.186	.800 .793	.763 .753	.738	.849 .839	1.180 1.150	.807 .799	1-20 UNEF-2A	1.013 1.003	.963	.973 .969
27	1.343 1.313	.935 .948	.918 .908	.854	1.084 .994	1.305 1.275	.962 .954	1 1/8-18 UNEF-2A	1.138 1.128	1.089	1.099 1.095
37	1.467 1.437	1.077 1.070	1.040 1.030	.978	1.126 1.116	1.430 1.400	1.084 1.076	1 3/4-18 UNEF-2A	1.263 1.253	1.214	1.224 1.220
61	1.910 1.880	1.365 1.358	1.316 1.306	1.271	1.414 1.404	1.874 1.844	1.367 1.360	1 1/2-18 UNEF-2A	1.514 1.504	1.463	1.471 1.467

SHELL SIZE	WEIGHT (LBS) SEE NOTE 7 PIN INSERT
3 7 12 19 27 37 61	(WEIGHT WILL BE SUPPLIED IN LATER REVISION)

TABLE II
KEYWAY POSITIONS

SIZE	AA	BB	CC	DD
3	23°	97°	187°	—
7	23°	97°	187°	277°
12	30°	105°	195°	270°
19	30°	105°	195°	270°
27	30°	105°	195°	270°
37	30°	105°	195°	270°
61	30°	105°	195°	270°

TABLE III
CONTACT DIMENSIONS

CONT SIZE	EE	GG	HH	JJ	KK
20	.041 .039	.088 .061	.058 .052	.188 .109	.110 .068
16	.0635 .0615	.116 .096	.078 .072	.251 .172	.141 .109
12	.095 .093	.150 .130	.122 .110	.251 .172	.143 .109

APPROVED 21 July 1971 REVISED

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.


P.A. NAVY AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS3469(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:	SHEET 3

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Limited Coordination)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
5935

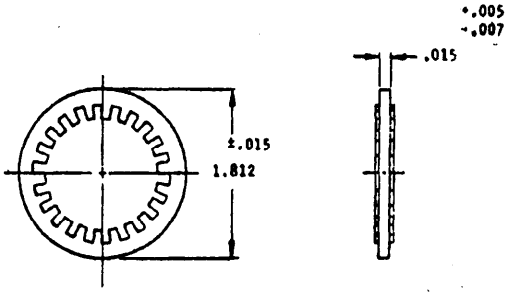

LOCKWASHER

FOR SIZE 61 ONLY

(SEE NOTES 14 & 15)

NOTES: (NOTES 1 THRU 6 APPLICABLE TO CONTACTS ONLY.)

1. CONTACT FINISH: GOLD PLATE .000050 INCH MIN. IN ACCORDANCE WITH MIL-G-45204. A SUITABLE UNDERPLATING MAY BE USED. SILVER UNDERPLATING SHALL NOT BE USED. FINISH IS APPLIED AFTER SEALING.
2. DIMENSIONS IN INCHES, DIMENSIONS APPLY AFTER PLATING.
3. 63 ALL OVER PER ASA-B46.1-1962 UNLESS OTHERWISE SPECIFIED.
4. REMOVE ALL BURRS AND SHARP EDGES .003 TO .005 R.
5. DIAMETERS TO BE CONCENTRIC WITHIN .004 TIR.
6. DIAMETERS IN THE SAME CROSS-SECTIONAL PLANE TO BE CONCENTRIC WITH EACH OTHER WITHIN .003 TIR.
7. WEIGHT LISTED IS CONNECTOR MAXIMUM WEIGHT PER SHELL SIZE.
8. SHELL MATERIAL: COLD ROLLED STEEL, PER QQ-S-637
9. SHELL FINISH: .0001 MIN. TIN PER MIL-T-10727, OVER NICKEL PER QQ-N-290.
10. EACH CONNECTOR SHALL BE PACKAGED WITH A PLASTIC DUST CAP OVER EACH END OF SHELL.
11. FOUR KEYWAYS (MMC) AND INSERT SHALL BE LOCATED WITH .004 EITHER SIDE OF (TP) RELATIVE TO MASTER KEYWAY (MMC) AND SHELL O.D. (MMC).
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCE SHALL BE .xx±.010 AND .XXX±.005; ANGULAR TOLERANCE, X° ±1°-0' AND X°X'±30'.
13. DIAMETERS SHOWN ARE AT BASE OF BARRIERS.
14. LOCKWASHER OR OTHER SUITABLE MEANS SHALL BE USED TO ASSURE NUT ASSEMBLY.
15. MOUNTING NUT AND LOCKWASHER FOR SIZES 3 THRU 37 ARE THE SAME AS MS3134E-11, EXCEPT PARTS SHALL BE TIN PLATED. SIZE 61 SHALL BE AS SPECIFIED ON SHEETS 1, 2 & 4 OF THIS DRAWING.
16. O-RING FOR SHELL SIZES 3 THRU 37 SHALL BE PER MS3134, SHEET 3. O-RING FOR SHELL SIZE 61 SHALL BE MS-29513-130.

APPROVED 21 July 1971 REVISED

P.A. NAVY AS Other Cust	International Interest	TITLE CONNECTOR, RECEPTACLE, ELECTRIC, HERMETIC, SOLDER TYPE, JAM NUT MOUNTING, PUSH-PULL COUPLING, SERIES 3 (CLASS H)	MILITARY STANDARD MS 3469(NAVY)
Procurement Specification MIL-C-81703		SUPERSEDES:-	SHEET 4

DD FORM 10 APR 64 672 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

(Limited Coordination)

This standard has been approved by the Department of the NAVY and is mandatory for use by that activity. All other military activities are required to apply this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:06Z
Check the source to verify that this is the current version before use.