


FED. SUP CLASS 5305

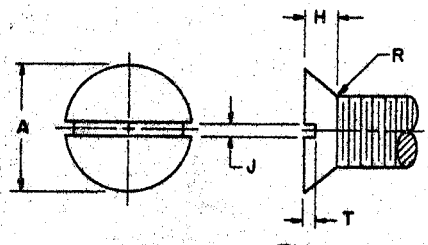

FULL HEAD





UNDERCUT HEAD

	Nominal Size D		#0 (.0600)	#1 (.0730)	#2 (.0860)	#4 (.1120)	#6 (.1380)	#8 (.1640)	#10 (.1900)	1/4 (.2500)
	Threads Per Inch		80NF	72NF	64NF	48NF	40NF	36NF	32NF	28UNF
	Body Diameter D_E	Max	.0600	.0730	.0860	.1120	.1380	.1640	.1900	.2500
		Min	.0496	.0615	.0733	.0954	.1184	.1424	.1658	.2225
	Head Diameter A	Max Sharp	.119	.146	.172	.225	.279	.332	.385	.507
		Min Sharp	.105	.130	.156	.207	.257	.308	.359	.477
		Abs Min	.101	.126	.150	.200	.249	.300	.348	.462
	Slot Width J	Max	.023	.026	.031	.039	.048	.054	.060	.075
		Min	.016	.019	.023	.031	.039	.045	.050	.064
	Flat S	Max	.002	.003	.003	.004	.005	.006	.007	.009
	Radius R	Max	.025	.027	.031	.041	.050	.055	.062	.071
Full Head	Head Height H	Max	.035	.043	.051	.067	.083	.100	.116	.153
		Min	.026	.033	.040	.055	.069	.084	.098	.131
	Slot Depth T	Max	.015	.019	.023	.030	.038	.045	.053	.070
		Min	.010	.012	.015	.020	.024	.029	.034	.046
Undercut Head	Head Height H_1	Max	.026	.032	.037	.048	.060	.071	.083	.108
		Min	.017	.022	.026	.036	.046	.055	.065	.086
	Slot Depth T_1	Max	.012	.016	.019	.025	.032	.037	.044	.058
		Min	.010	.012	.015	.020	.024	.029	.034	.046

Length L	Tolerance	#0	#1	#2	#4	#6	#8	#10	1/4
1/8		1	6	13	22	33	48		
3/16		2	7	14	23	34	49	67	
1/4		3	8	15	24	35	50	68	85
5/16		4	9	16	25	36	51	69	86
3/8	+0 -1/32	5	10	17	26	37	52	70	87
7/16			11	18	27	38	53	71	88
1/2			12	19	28	39	54	72	89
5/8				20	29	40	55	73	90
3/4				21	30	41	56	74	91
7/8					31	42	57	75	92
1					32	43	58	76	93
1-1/4	+0 -1/16					44	59	77	94
1-1/2						45	60	78	95
1-3/4						46	61	79	96
2						47	62	80	97
2-1/4	+0 -3/32						63	81	98
2-1/2							64	82	99
2-3/4							65	83	100
3							66	84	101

Threads shall extend to within 2 threads of the bearing surface of the head, or closer if practicable. Minimum complete thread length of 1-3/4.

Ⓐ CANCELLED SEE SHEET 2

Material: Carbon steel, Specification QQ-W-409 or QQ-S-633, except Bessemer compositions; 55,000 PSI minimum ultimate tensile strength.

Finish: Plain (untreated).

Threads: The threads shall be in accordance with Screw-Thread Standards for Federal Services Handbook H-28.

Notes:
(1) Referenced documents of issue in effect on date of invitation for bids shall apply.
(2) In case of conflict with any referenced document, this standard will govern.
(3) The MS part number consists of the MS sheet number, plus the dash number. Example: MS 35238-1.
(4) Sizes above dotted line have undercut head.
(5) All dimensions in inches.

Ⓐ For changes see sheets 1 and 2.

Approved Feb 9, 1954 Revised Ⓐ 5 April 1962

P.A.	Title	
ORD	SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, PLAIN FINISH, NF-2A AND UNF-2A.	MILITARY STANDARD
Other Cust SHIPS		MS 35238
Procurement Specification FF-S-92	Supersedes:	Sheet 1 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:12Z
Check the source to verify that this is the current version before use.

DD FORM 672-1 (Superseded)

FED. SUP CLASS
5305

Nominal Size D			5/16 (.3125)	3/8 (.3750)	7/16 (.4375)	1/2 (.5000)	9/16 (.5625)	5/8 (.6250)	3/4 (.7500)
Threads Per Inch			24UNF	24UNF	20UNF	20UNF	18UNF	18UNF	16UNF
Body Diameter D_E		Max	.3125	.3750	.4375	.5000	.5625	.6250	.7500
		Min	.2806	.3430	.3995	.4619	.5205	.5828	.7029
Head Diameter A		Max Sharp	.635	.762	.812	.875	1.000	1.125	1.375
		Min Sharp	.600	.722	.771	.831	.950	1.069	1.306
		Abs Min	.581	.700	.743	.802	.919	1.035	1.267
Slot Width J		Max	.084	.094	.094	.106	.118	.133	.149
		Min	.072	.081	.081	.091	.102	.116	.131
Flat S		Max	.011	.013	.016	.018	.020	.023	.027
Radius R		Max	.083	.083	.100	.100	.110	.110	.125
Full Head	Head Height H	Max	.191	.230	.223	.223	.260	.298	.372
		Min	.165	.200	.190	.186	.220	.253	.319
	Slot Depth T	Max	.088	.106	.103	.103	.120	.137	.171
		Min	.058	.070	.066	.065	.077	.088	.111
Undercut Head	Head Height H_1	Max	.135	.162	.156	.160	.185	.212	.264
		Min	.109	.132	.126	.123	.145	.167	.211
	Slot Depth T_1	Max	.073	.088	.085	.085	.100	.114	.142
		Min	.058	.070	.066	.065	.077	.088	.111

Length L	Tolerance	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.	Dash No.
1/8, 3/16, 1/4, 5/16, 3/8, 7/16, 1/2, 5/8, 3/4, 7/8, 1	+0 -1/32	102, 103, 104, 105, 106, 107, 108, 109	117, 118, 119, 120, 121, 122	130, 131, 132, 133, 134	Ⓐ CANCELLED SEE NOTE	153, 154, 155	163, 164, 165	173, 174
1-1/4, 1-1/2, 1-3/4, 2	+0 -1/16	110, 111, 112, 113	123, 124, 125, 126	135, 136, 137, 138	146, 147, 148, 149	156, 157, 158, 159	166, 167, 168, 169	175, 176, 177, 178
2-1/4, 2-1/2, 2-3/4, 3	+0 -3/32	114, 115, 116	127, 128, 129	139, 140, 141	150, 151, 152	160, 161, 162	170, 171, 172	179, 180, 181

THREADS SHALL EXTEND TO WITHIN 2 THREADS OF THE BEARING SURFACE OF THE HEAD, OR CLOSER IF PRACTICABLE.

MINIMUM COMPLETE THREAD LENGTH OF 1-3/4.

NOTE: FOR ILLUSTRATION, MATERIAL, FINISH, AND OTHER PERTINENT DATA SEE SHEET 1.

Ⓐ CANCELLED AFTER 7 May 1962 USE MS 35191. INTERCHANGEABILITY RELATIONSHIP-MS 35191 CAN REPLACE THE CANCELLED SCREWS OF THE SAME SIZE. THE CANCELLED MS 35238 CANNOT ALWAYS REPLACE MS 35191 AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. THEN USE ONLY THE SUPERSEDING MS SCREWS OF THE SAME SIZE FOR DESIGN AND REPLACEMENT.

APPROVED FEB 9, 1954 REVISED Ⓐ - FOR CHANGES SEE SHEETS 1 AND 2.

P.A. ORD
Other Cust SHIPS

TITLE
SCREW, MACHINE, FLAT COUNTERSUNK HEAD, SLOTTED, CARBON STEEL, PLAIN FINISH, NF-2A AND UNF-2A

MILITARY STANDARD
MS 35238

PROCUREMENT SPECIFICATION
FF-S-92

SUPERSEDES:

SHEET 2 OF

Source: https://assist.dla.mil -- Downloaded: 2026-01-23 17:17 EST
Check the source to verify that this is the current version before use.