
REVIEW ACTIVITES CS
USER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

FED SUP CLASS
3030

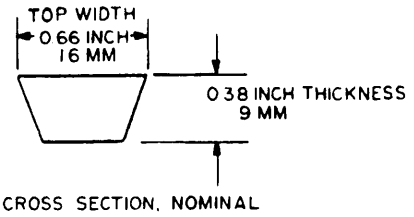

BELT CROSS SECTION, NOMINAL

DASH NUMBERS AND EFFECTIVE OUTSIDE LENGTH

EFFECTIVE LENGTHS-INCHES

DASH NO	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-5L250	25 0	+0 25-0.62
-5L260	26 0	+0 25-0.62
-5L270	27 0	+0.25-0.62
-5L280	28 0	+0 25-0.62
-5L290	29 0	+0 25-0.62
-5L300	30 0	+0 25-0.62
-5L310	31 0	+0 25-0.62
-5L320	32 0	+0 25-0.62
-5L330	33 0	+0 25-0.62
-5L340	34 0	+0 25-0.62
-5L350	35 0	+0 25-0.62
-5L360	36 0	+0 25-0.62
-5L370	37 0	+0 25-0.62
-5L380	38 0	+0 25-0.62
-5L390	39 0	+0 25-0.62
-5L400	40 0	+0 25-0.62
-5L410	41 0	+0 25-0.62
-5L420	42 0	+0 25-0.62
-5L430	43 0	+0 25-0.62
-5L440	44 0	+0 25-0.62
-5L450	45 0	+0 25-0.62
-5L460	46 0	+0 25-0.62
-5L470	47 0	+0 25-0.62
-5L480	48 0	+0 25-0.62
-5L490	49 0	+0 25-0.62
-5L500	50 0	+0 25-0.62
-5L510	51 0	+0 25-0.62
-5L520	52 0	+0 25-0.62
-5L530	53 0	+0 25-0.62
-5L540	54 0	+0 25-0.62
-5L550	55 0	+0 25-0.62
-5L560	56 0	+0 25-0.62
-5L570	57 0	+0 25-0.62
-5L580	58 0	+0 25-0.62
-5L590	59 0	+0 25-0.62

EFFECTIVE LENGTHS-MILLIMETERS

DASH NO	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-16R635	635	+ 3-10
-16R660	660	+ 6-16
-16R685	685	+ 6-16
-16R710	710	+ 6-16
-16R735	735	+ 6-16
-16R760	760	+ 6-16
-16R785	785	+ 6-16
-16R815	815	+ 6-16
-16R840	840	+ 6-16
-16R865	865	+ 6-16
-16R890	890	+ 6-16
-16R915	915	+ 6-16
-16R940	940	+ 6-16
-16R965	965	+ 6-16
-16R990	990	+ 6-16
-16R1015	1015	+ 6-16
-16R1040	1040	+ 6-16
-16R1065	1065	+ 6-16
-16R1090	1090	+ 6-16
-16R1120	1120	+ 6-16
-16R1145	1145	+ 6-16
-16R1170	1170	+ 6-16
-16R1195	1195	+ 6-16
-16R1220	1220	+ 6-16
-16R1245	1245	+ 6-16
-16R1270	1270	+ 6-16
-16R1295	1295	+ 6-16
-16R1320	1320	+ 6-16
-16R1345	1345	+ 6-16
-16R1370	1370	+ 6-16
-16R1395	1395	+ 6-16
-16R1420	1420	+ 6-16
-16R1450	1450	+ 6-16
-16R1475	1475	+ 6-16
-16R1500	1500	+ 6-16

ENTIRE STANDARD REVISED

APPROVED 31 AUGUST 1964 REVISED (A) MAY 1973 (B) 22 JUNE 1981

P A	ME	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other (List)	99		BELT, V. FRACTIONAL HORSEPOWER (5L AND 16R CROSS-SECTIONAL DESIGNATION).	MS39243
PROCUREMENT SPECIFICATION: ZZ-B-215		SUPERSEDES		SHEET 1 OF 3

DD FORM 672-1 (COORDINATED)

3030-0125

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.

DASH NUMBERS AND EFFECTIVE OUTSIDE LENGTH (CONTINUED)

EFFECTIVE LENGTHS-INCHES			EFFECTIVE LENGTHS-MILLIMETERS		
DASH NO	EFFECTIVE OUTSIDE LENGTH	TOLERANCE	DASH NO	EFFECTIVE OUTSIDE LENGTH	TOLERANCE
-5L600	60.0	+0.25-0.62	-16R1525	1525	+6-16
-5L610	61.0	+0.31-0.69	-16R1550	1550	+8-18
-5L620	62.0	+0.31-0.69	-16R1575	1575	+8-18
-5L630	63.0	+0.31-0.69	-16R1600	1600	+8-18
-5L640	64.0	+0.31-0.69	-16R1625	1625	+8-18
-5L650	65.0	+0.31-0.69	-16R1650	1650	+8-18
-5L660	66.0	+0.31-0.69	-16R1675	1675	+8-18
-5L670	67.0	+0.31-0.69	-16R1700	1700	+8-18
-5L680	68.0	+0.31-0.69	-16R1725	1725	+8-18
-5L690	69.0	+0.31-0.69	-16R1755	1755	+8-18
-5L700	70.0	+0.31-0.69	-16R1780	1780	+8-18
-5L710	71.0	+0.31-0.69	-16R1805	1805	+8-18
-5L720	72.0	+0.31-0.69	-16R1830	1830	+8-18
-5L730	73.0	+0.31-0.69	-16R1855	1855	+8-18
-5L740	74.0	+0.31-0.69	-16R1880	1880	+8-18
-5L750	75.0	+0.31-0.69	-16R1905	1905	+8-18
-5L760	76.0	+0.31-0.69	-16R1930	1930	+8-18
-5L770	77.0	+0.31-0.69	-16R1955	1955	+8-18
-5L780	78.0	+0.31-0.69	-16R1980	1980	+8-18
-5L790	79.0	+0.31-0.69	-16R2010	2010	+8-18
-5L800	80.0	+0.62-0.88	-16R2030	2030	+16-22
-5L820	82.0	+0.62-0.88	-16R2080	2080	+16-22
-5L840	84.0	+0.62-0.88	-16R2130	2130	+16-22
-5L860	86.0	+0.62-0.88	-16R2180	2180	+16-22
-5L880	88.0	+0.62-0.88	-16R2240	2240	+16-22
-5L900	90.0	+0.62-0.88	-16R2290	2290	+16-22
-5L920	92.0	+0.62-0.88	-16R2340	2340	+16-22
-5L940	94.0	+0.62-0.88	-16R2390	2390	+16-22
-5L960	96.0	+0.62-0.88	-16R2440	2440	+16-22
-5L980	98.0	+0.62-0.88	-16R2490	2490	+16-22
-5L1000	100.0	+0.62-0.88	-16R2540	2540	+16-22

NOTES:

1. DIMENSIONS ARE IN INCHES AND MILLIMETERS (MM).
2. TO ORDER REQUIRED BELT SIZE SPECIFY ONLY ONE DASH NUMBER, EITHER -5L SERIES FOR INCH MEASUREMENT OR -16R SERIES FOR MILLIMETER MEASUREMENTS.
3. THE MILLIMETER UNITS CHOSEN FOR THIS STANDARD ARE NOT ALWAYS AN EXACT ARITHMETIC CONVERSION OF THE CORRESPONDING INCH UNITS.
4. THE DASH NUMBERS CORRESPOND TO INDUSTRY STANDARD BELT SIZES. EXAMPLE: -5L250, THE -5L INDICATES CROSS SECTION DESIGNATION IN INCH DIMENSIONS, 250 INDICATES EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES; -16R635, THE -16R INDICATES CROSS SECTION DESIGNATION IN MILLIMETERS, 635 INDICATES EFFECTIVE OUTSIDE LENGTH IN MILLIMETERS.
5. OIL-RESISTANCE. SEE APPLICABLE PARAGRAPH IN ZZ-B-215. WHEN OIL-RESISTANCE IS REQUIRED THE DASH PRECEDING THE DASH NUMBER SHALL BE REPLACED BY THE LETTER "R".

APPROVED 31 AUGUST 1964 REVISED (B) FOR CHANGES SHEETS 1, 2, AND 3

Source: https://assist.dla.mil -- Downloaded: 20261O-23T17:49Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
3030

6 THE MS PART NUMBER CONSISTS OF THE MS SHEET NUMBER, PLUS OIL-RESISTANCE (WHEN APPLICABLE), PLUS THE DASH NUMBER (CROSS SECTION AND LENGTH).

EXAMPLES:

MS39243-5L 250

- 25 INCH EFFECTIVE OUTSIDE LENGTH IN TENTHS OF INCHES
- CROSS SECTION DESIGNATION

MS39243 R 16R 635

- 635 MM EFFECTIVE OUTSIDE LENGTH
- CROSS SECTION DESIGNATION
- OIL-RESISTANCE REQUIRED

7 BELT RIDE LIMITS ARE +0.12, -0.03 INCH (+3.0 -0.8 MM) MIN. BOTTOM CLEARANCE IS 0.09 INCH (2.3 MM) ON TEST PULLEY. SEE APPLICABLE PARAGRAPH IN ZZ-B-215.

8. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

9. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BIDS, OR REQUEST FOR PROPOSAL, EXCEPT THAT REFERENCED ADOPTED INDUSTRY DOCUMENTS SHALL GIVE THE DATE OF THE ISSUE ADOPTED.

APPROVED 31 AUGUST 1964 REVISED (B) FOR CHANGES SEE SHEETS 1, 2, AND 3

P A / Other Cust	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
ME / 99		BELT, V: FRACTIONAL HORSEPOWER (5L AND 16R CROSS-SECTIONAL DESIGNATION).	MS39243
PROCUREMENT SPECIFICATION: ZZ-B-215	SUPERSEDES		SHEET 3 OF 3

DD FORM 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:49Z
Check the source to verify that this is the current version before use.