
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

CONFIGURATION AND MATERIAL


CORROSION RESISTANT STEEL (450° F)

FED. SUP. CLASS 4720

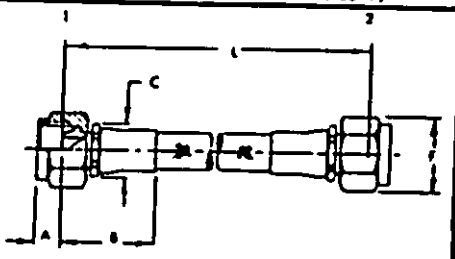

STYLE "A"


FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.		
STRAIGHT	STRAIGHT	-3/-4C	.191	1.282	.620	.580		
		-4C	.222	1.222	.620	.654		
		-5C	.235	1.340	.680	.726		
		-6C	.250	1.469	.750	.798		
		-8C	.310	1.640	.880	1.014		
		-10C	.356	1.940	.967	1.158		
		-12C	.393	1.913	1.122	1.447		
		-16C	.429	2.293	1.480	1.736		
		-20C	.393	2.577	1.750	2.328		
		-24C	.393	2.800	2.150	2.621		

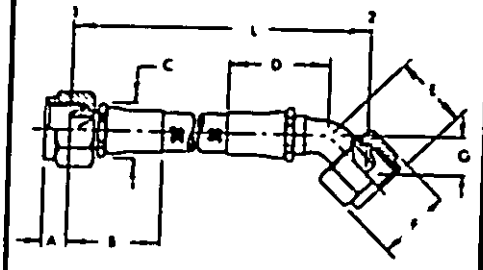

STYLE "B"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
STRAIGHT	45 DEG.	-3/-4C	.191	1.282	.620	1.240	.950	.580
		-4C	.222	1.221	.620	1.490	.970	.654
		-5C	.235	1.340	.680	1.495	1.017	.726
		-6C	.250	1.469	.750	1.610	1.122	.798
		-8C	.310	1.640	.880	1.722	1.426	1.014
		-10C	.356	1.940	.967	2.037	1.596	1.158
		-12C	.393	1.913	1.122	2.368	1.739	1.447
		-16C	.429	2.298	1.480	2.583	1.931	1.736
		-20C	.393	2.577	1.750	2.946	2.084	2.328
		-24C	.398	2.800	2.150	3.210	2.376	2.621

HOSE SIZE	"G" MIN.	"G" MAX.
-3/4C	.912	.537
-4C	.404	.529
-5C	.428	.553
-6C	.506	.631
-8C	.542	.789
-10C	.631	.877
-12C	.631	.952
-16C	.741	1.069
-20C	.863	1.196
-24C	1.012	1.402

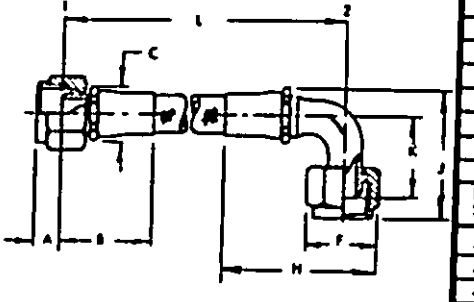

STYLE "C"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
STRAIGHT	90 DEG.	-3/4C	.191	1.282	.620	.580	1.845	1.350
		-4C	.222	1.221	.620	.654	1.885	1.370
		-5C	.235	1.340	.680	.726	1.980	1.550
		-6C	.250	1.469	.750	.798	2.205	1.687
		-8C	.310	1.640	.880	1.014	2.495	2.032
		-10C	.356	1.940	.967	1.158	2.955	2.437
		-12C	.393	1.913	1.122	1.447	3.705	2.795
		-16C	.429	2.298	1.480	1.736	4.100	3.160
		-20C	.393	2.577	1.750	2.328	4.835	3.664
		-24C	.398	2.800	2.150	2.621	5.480	4.251

HOSE SIZE	"K" MIN.	"K" MAX.
-3/4C	.721	.846
-4C	.705	.830
-5C	.788	.975
-6C	.895	1.082
-8C	1.032	1.282
-10C	1.357	1.607
-12C	1.591	1.841
-16C	1.741	1.991
-20C	2.021	2.396
-24C	2.403	2.778

Ⓡ ENTIRE STANDARD REVISED.

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓡ 30 June 1983


P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD
PROCUREMENT SPECIFICATION - MIL-H-25579		SUPERSEDES	MS 8006
			SHEET 1 OF 8 FSC 4720

Project No. 4720-0537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
CORROSION RESISTANT STEEL (450° F)


FSC. SUP. CLASS 4720

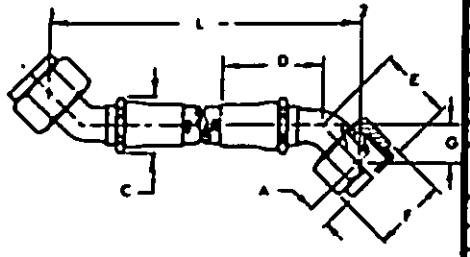

STYLE "D"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	
45 DEG.	45 DEG.	-3/-4C	.191	.620	1.240	.950	.580	
		-4C	.222	.620	1.490	.970	.654	
		-5C	.235	.680	1.495	1.017	.726	
		-6C	.230	.750	1.610	1.122	.798	
		-8C	.310	.880	1.722	1.426	1.014	
		-10C	.356	.967	2.037	1.596	1.158	
		-12C	.393	1.122	2.368	1.739	1.447	
		-16C	.429	1.480	2.583	1.931	1.736	
		-20C	.393	1.750	2.946	2.084	2.328	
		-24C	.398	2.150	3.210	2.376	2.621	

HOSE SIZE	"G" MIN.	"G" MAX.
-3/4C	.412	.537
-4C	.404	.529
-5C	.428	.553
-6C	.506	.631
-8C	.542	.789
-10C	.631	.877
-12C	.631	.952
-16C	.741	1.069
-20C	.863	1.196
-24C	1.012	1.402

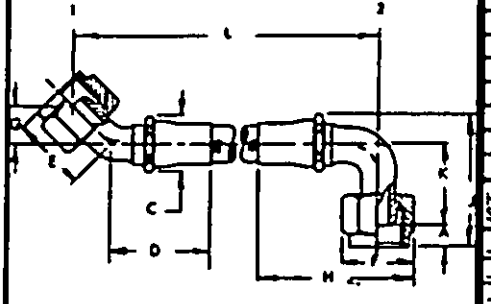

STYLE "E"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	90 DEG.	-3/-4C	.191	.620	1.240	.950	.580	.412
		-4C	.222	.620	1.490	.970	.654	.404
		-5C	.235	.680	1.495	1.017	.726	.428
		-6C	.230	.750	1.610	1.122	.798	.506
		-8C	.310	.880	1.722	1.426	1.014	.542
		-10C	.356	.967	2.037	1.596	1.158	.631
		-12C	.393	1.122	2.368	1.739	1.447	.631
		-16C	.429	1.480	2.583	1.931	1.736	.741
		-20C	.393	1.750	2.946	2.084	2.328	.863
		-24C	.398	2.150	3.210	2.376	2.621	1.012

HOSE SIZE	"G" MAX.	"H" MAX.	"J" MAX.	"K" MIN.	"K" MAX.			
-3/4C	.537	1.805	1.350	.721	.846			
-4C	.529	1.885	1.370	.705	.830			
-5C	.553	1.980	1.550	.788	.975			
-6C	.631	2.205	1.687	.895	1.082			
-8C	.789	2.495	2.032	1.032	1.282			
-10C	.877	2.955	2.457	1.357	1.607			
-12C	.952	3.705	2.795	1.591	1.841			
-16C	1.069	4.100	3.160	1.741	1.991			
-20C	1.196	4.835	3.664	2.021	2.396			
-24C	1.402	5.480	4.251	2.403	2.778			

Army - AV, Air Force - 84 - User Activities:

Navy - AS, Air Force - 84 - Review Activities:

APPROVED 16 AUG 71 — REVISED 15 DEC 76 — 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 2 OF 8 FSC 4720

Project No. 4720-0537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
CORROSION RESISTANT STEEL (450° F)

FED. SUP. CLASS 4720

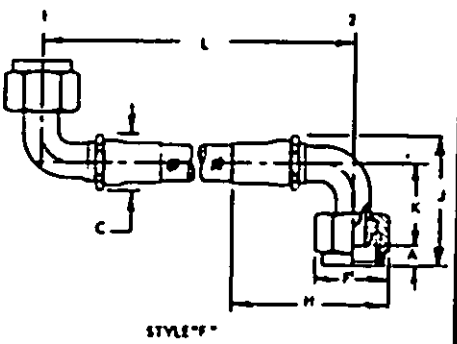

STYLE "F"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.	
90 DEG.	90 DEG.	-3/-4C	.191	.620	.580	1.845	1.350	
		-4C	.222	.620	.654	1.885	1.370	
		-5C	.235	.680	.726	1.980	1.590	
		-6C	.234	.750	.798	2.205	1.667	
		-8C	.310	.880	1.014	2.495	2.032	
		-10C	.356	.967	1.158	2.955	2.037	
		-12C	.393	1.122	1.407	3.705	2.795	
		-16C	.429	1.480	1.736	4.100	3.160	
		-20C	.393	1.750	2.328	4.835	3.664	
		-24C	.398	2.150	2.621	5.680	4.251	

HOSE SIZE	"K" MIN.	"K" MAX.						
-3/4C	.721	.846						
-4C	.705	.830						
-5C	.788	.975						
-6C	.895	1.082						
-8C	1.032	1.282						
-10C	1.357	1.667						
-12C	1.561	1.891						
-16C	1.741	1.991						
-20C	2.021	2.396						
-24C	2.403	2.778						

User Activities: Army - Navy - Air Force - DLA -

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓑ 30 June 1983

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY · STANDARD MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 1 OF 8 FSC 4720

Project No. 4720-0537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.


CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275°F)

PRD. SUP. CLASS 4729

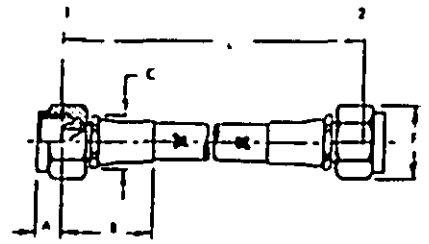

STYLE "G"


FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.		
STRAIGHT	STRAIGHT							
		-8	.310	1.640	.880	1.014		
		-10	.356	1.940	.967	1.158		
		-12	.393	1.913	1.122	1.447		
		-16	.429	2.298	1.400	1.736		
		-20	.393	2.577	1.750	2.328		
		-24	.398	2.800	2.150	2.621		

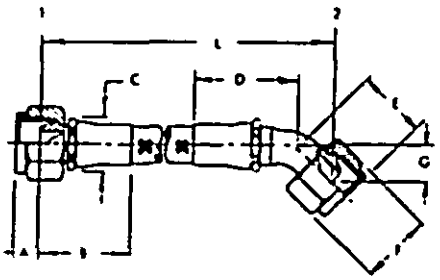

STYLE "H"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.
STRAIGHT	45 DEG.							
		-8	.310	1.640	.880	1.722	1.426	1.014
		-10	.356	1.940	.967	2.037	1.596	1.158
		-12	.393	1.913	1.122	2.368	1.739	1.447
		-16	.429	2.298	1.400	2.583	1.931	1.736
		-20	.393	2.577	1.750	2.946	2.084	2.328
		-24	.398	2.800	2.150	3.210	2.376	2.621

HOSE SIZE	"G" MIN.	"G" MAX.
-8	.542	.789
-10	.631	.877
-12	.631	.932
-16	.741	1.069
-20	.865	1.196
-24	1.012	1.402

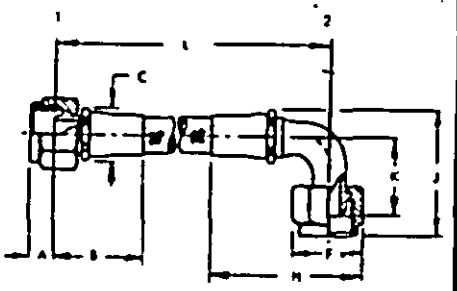

STYLE "J"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"B" MAX.	"C" MAX.	"F" MAX.	"H" MAX.	"J" MAX.
STRAIGHT	90 DEG.							
		-8	.310	1.640	.880	1.014	2.495	2.038
		-10	.356	1.940	.967	1.158	2.955	2.437
		-12	.393	1.913	1.122	1.447	3.705	2.795
		-16	.429	2.298	1.400	1.736	4.100	3.160
		-20	.393	2.577	1.750	2.328	4.835	3.664
		-24	.398	2.800	2.150	2.621	5.480	4.051

HOSE SIZE	"K" MIN.	"K" MAX.
-8	1.032	1.282
-10	1.357	1.607
-12	1.391	1.841
-16	1.741	1.984
-20	2.021	2.396
-24	2.403	2.778

User Activities: Army - Navy - Air Force - DLA - CS

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.


P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 4 OF 8 PSC 4720

Project No. 4720-0537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL
COMBINATION ALUMINUM AND
CORROSION RESISTANT STEEL (22.5° F)


FED. SUP. CLASS 4720

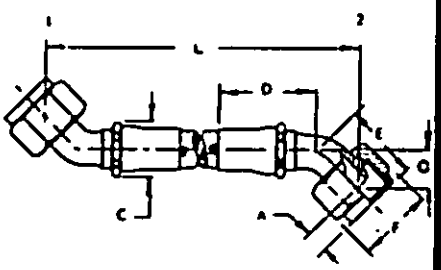

STYLE "K"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	
45 DEG.	45 DEG.							
		-8	.310	.880	1.722	1.426	1.014	
		-10	.356	.967	2.037	1.596	1.158	
		-12	.393	1.122	2.368	1.739	1.447	
		-16	.429	1.480	2.583	1.931	1.736	
		-20	.393	1.750	2.946	2.084	2.328	
		-24	.398	2.150	3.210	2.376	2.621	

HOSE SIZE	"G" MIN.	"G" MAX.
-8	.542	.789
-10	.631	.877
-12	.631	.952
-16	.741	1.069
-20	.863	1.196
-24	1.012	1.402

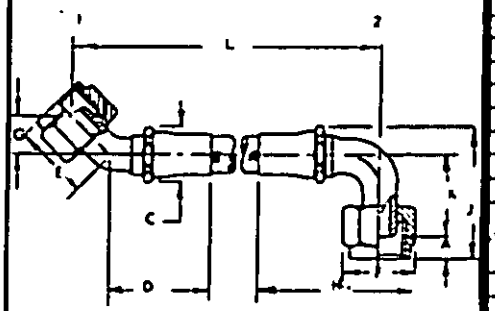

STYLE "M"

FITTING ENDS 1	FITTING ENDS 2	HOSE SIZE	"A" NOM.	"C" MAX.	"D" MAX.	"E" MAX.	"F" MAX.	"G" MIN.
45 DEG.	90 DEG.							
		-8	.310	.880	1.722	1.426	1.014	.542
		-10	.356	.967	2.037	1.596	1.158	.631
		-12	.393	1.122	2.368	1.739	1.447	.631
		-16	.429	1.480	2.583	1.931	1.736	.741
		-20	.393	1.750	2.946	2.084	2.328	.863
		-24	.398	2.150	3.210	2.376	2.621	1.012

HOSE SIZE	"G" MAX.	"H" MAX.	"J" MAX.	"K" MIN.	"K" MAX.
-8	.789	2.495	2.032	1.032	1.282
-10	.877	2.955	2.437	1.357	1.607
-12	.952	3.705	2.795	1.591	1.841
-16	1.069	4.100	3.160	2.741	1.991
-20	1.196	4.835	3.664	2.021	2.396
-24	1.402	5.480	4.251	2.403	2.778

User Activities: Army - Navy - Air Force - DLA - CS

Review Activities: Army - Navy - Air Force - DLA - CS

APPROVED 16 AUG 71 REVISED Ⓐ 15 DEC 76 Ⓑ 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 5 OF 8 FSC 4720


Project No. 4720-8537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

CONFIGURATION AND MATERIAL

COMBINATION ALUMINUM AND CORROSION RESISTANT STEEL (275° F)

FED. SUP. CLASS 4720

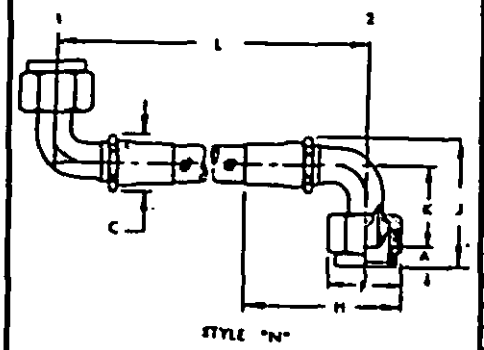

FITTING ENDS		HOSE SIZE	"A" NOM.	"C" MAX.	"K" MAX.	"H" MAX.	"J" MAX.	
1	2							
90 DEG.	90 DEG.							
		-8	.310	.880	1.014	2.475	2.032	
		-10	.356	.967	1.158	2.955	2.437	
		-12	.395	1.122	1.447	3.705	2.795	
		-16	.479	1.480	1.736	4.100	3.150	
		-20	.595	1.750	2.328	4.835	3.684	
		-24	.718	2.150	2.621	5.490	4.834	

HOSE SIZE	"K" MIN.	"K" MAX.
-8	1.032	1.282
-10	1.357	1.607
-12	1.591	1.841
-16	1.741	1.991
-20	2.021	2.396
-24	2.403	2.778

User Activities: Army - MR, Navy - AS, Air Force - 99

Review Activities: Army - MR, Navy - AS, Air Force - 99

APPROVED 16 AUG 71 REVISED (A) 15 DEC 76 (B) 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE: HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579		SUPERSEDES	SHEET 6 OF 8 FSC 4720

Project No. 4720-0537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4720

NOTES:


1. CONFIGURATION:

HOSE SIZE IN HOSE ASSEMBLIES IS DESIGNATED BY LETTER INSTEAD OF NUMBER (SEE TABLE BELOW). FOR DOUBLE ELBOW HOSE ASSEMBLIES, ANGULAR ORIENTATION BETWEEN THE ELBOWS IS EXPRESSED IN THREE DIGITS. THE ANGLE IS MEASURED IN DEGREES COUNTERCLOCKWISE FROM THE CENTERLINE OF THE NEAREST FITTING WHEN THIS FITTING IS POSITIONED AT 6 O'CLOCK TO THE CENTERLINE OF THE OTHER FITTING AS SHOWN IN THE FIGURE. IF THE DESIRED ORIENTATION IS ZERO DEGREES, SPECIFY AS 000.

LETTER DESIGNATIONS FOR HOSE DASH NUMBERS

HOSE ASSEMBLY SIZE	-3/-4	-4	-5	-6	-8	-10	-12	-16	-20	-24
LETTER DESIGNATION	D	E	F	G	H	J	K	M	N	P

A -3/-4 ASSEMBLY CONSISTS OF -3 TUBE O.D. FITTINGS WITH A -4 TUBE O.D. HOSE.



2. E MAX AND J MAX ARE INSTALLATION DIMENSIONS AND NOT DESIGN DIMENSIONS.

3. STYLES G, H, J, K, M, AND N HAVE COMBINATION CRES AND ALUMINUM FITTINGS.

4. FOR "IDENTIFICATION OF PRODUCT", SEE PROCUREMENT SPECIFICATION.

THE SWIVEL NUT AND NIPPLE END SHALL MATE WITH MS33514 FITTINGS. THE SWIVEL NUT THREADS SHALL CONFORM TO MIL-S-8879.

LENGTH "L" TO BE MEASURED BETWEEN CENTERS OF NIPPLE ENDS ALONG A STRAIGHT LINE PARALLEL TO HOSE LENGTH WITH HOSE LAID OUT HORIZONTALLY AND STRAIGHT.

HOSE IN ACCORDANCE WITH MIL-H-27267.

HOSE ASSEMBLY TO BE SPECIFIED IN INCHES AND IN THE FOLLOWING LENGTH INCREMENTS ONLY:

UNDER 12 INCHES LONG, NOT LESS THAN 1/8 INCH. TOLERANCE ± 1/8.
12 TO 10 INCHES LONG, NOT LESS THAN 1/4 INCH. TOLERANCE ± 1/8.
OVER 10 INCHES LONG, NOT LESS THAN 1/2 INCH.
TOLERANCE FOR LENGTHS FROM 14 TO 36 INCHES ± 1/4.
TOLERANCE FOR LENGTHS FROM 36 TO 50 INCHES ± 1/2.
TOLERANCE FOR LENGTHS OVER 50 INCHES ± 1%.

5. THE PART NUMBER SHALL BE FORMULATED TO REFLECT THE HOSE ASSEMBLY TUBE O.D., LENGTH, STYLE AND ANGLE BETWEEN ELBOWS, AS APPLICABLE.

MS8006B1007-020

- HOSE ASSEMBLY FOR 1/2 INCH TUBE O.D., 10 INCHES IN LENGTH, 30° BETWEEN ELBOWS.
- ANGLE BETWEEN ELBOWS IN DEGREES (NOT REQUIRED FOR STYLES A, B, C, G, H, AND J)
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 6)
- LENGTH IN EIGHTHS (1/8) OF AN INCH
- LENGTH IN INCHES (FOR LENGTHS UNDER 10 INCHES, USE 09, 08, 07, ETC.)
- SIZE B = -8 OR 1/2 INCH TUBE O.D.

MS8006J1028*

- HOSE ASSEMBLY FOR 5/8 INCH TUBE O.D., 9-1/4 INCHES IN LENGTH.
- * CODE LETTER SEE BELOW
- STYLE AND MATERIAL OF FITTING ASSEMBLY (SEE SHEETS 1 THRU 6)
- LENGTH IN EIGHTS (1/8) OF AN INCH
- LENGTH IN INCHES
- SIZE J = -10 OR 5/8 INCH TUBE O.D.

* ADD CODE LETTER BELOW FOR ADDITIONAL FEATURES (IF REQUIRED)

"A" AS1072 SLEEVE, FIRE PROTECTION, SILICONE COVERED, -65°F (-54°C) THRU +500°F (+260°C) SECURED WITH CRES BANDS AS REQUIRED.
"B" AS1073 - CODE B SLEEVE, ABRASION PROTECTION, HEAT SHRINKABLE, BLACK POLYOLEFIN, -65°F (-54°C) THRU +250°F (+121°C).
"C" AS1291 - CODE A SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS WHITE TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"D" AS1291 - CODE C SLEEVE, CHAFE GUARD, EXTRUDED SEAMLESS TRANSPARENT FEP, -65°F (-54°C) THRU +350°F (+177°C) SECURED WITH CRES BANDS AS REQUIRED.
"E" AS1298 SLEEVE, HEAVY WALL CHAFE GUARD, EXTRUDED SEAMLESS BLACK TFE, -65°F (-54°C) THRU +450°F (+232°C) SECURED WITH CRES BANDS AS REQUIRED.
"L" LOCKWIRE HOLE
"AL" CODE A + L
"BL" CODE B + L
"CL" CODE C + L
"DL" CODE D + L
"EL" CODE E + L

USER ACTIVITIES
Army - AV
Navy - AS
Air Force - 11
DLA - CS

REVIEWER ACTIVITIES
Army - AV
Navy - AS
Air Force - 11
DLA - CS

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1985

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. AIR FORCE-11	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust ARMY - AV NAVY - AS		HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 7 OF 8 FSC 4720

DD FORM 672-1

Project No. 4720-0537

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4720

6. A TRUE CIRCULAR CROSS SECTION IS NOT REQUIRED WITHIN THE ANGLE OF THE BEND OF THE END FITTING ELBOW. HOWEVER, OVALITY SHALL NOT EXCEED 7-1/2 PERCENT OF THE NOMINAL TUBING O.D. DIMENSIONS FOR THE BALL WHICH MUST PASS THROUGH THE ENTIRE LENGTH OF THE ELBOW ARE LISTED BELOW FOR THE VARIOUS SIZES AS INDICATED.

HOSE SIZE TUBE	-3/-4	-4	-5	-6	-8	-10	-12	-16	-20	-24
BALL SIZE IN INCHES	.088	.119	.174	.230	.313	.391	.515	.750	.969	1.188

7. DIMENSIONS IN INCHES.

8. THE CUT ENDS OF THE FIRE PROTECTION SLEEVE (CODE A) SHALL BE COATED WITH RTV SILICONE RUBBER, PRIOR TO INSTALLATION TO PREVENT WICKING OF FLUIDS. AFTER INSTALLATION, CRACKS OR VOIDS IN THE FIRE PROTECTION SLEEVE, WHICH EXPOSE THE ASBESTOS/FIBERCLASS, SHALL BE COATED WITH RTV RUBBER.

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

REFERENCE DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

APPROVED 16 AUG 71 REVISED 15 DEC 76 30 June 1995

P. A. AIR FORCE-11 Other Cust ARMY - AV NAVY - AS	INTERNATIONAL INTEREST	TITLE HOSE ASSEMBLY, PERMANENTLY ATTACHED FITTINGS, TETRAFLUOROETHYLENE, HIGH TEMPERATURE, MEDIUM PRESSURE, FLARELESS TO FLARELESS	MILITARY STANDARD MS 8006
PROCUREMENT SPECIFICATION MIL-H-25579	SUPERSEDES		SHEET 6 OF 6 FSC 4720

DD FORM 672-1 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Project No. 4720-0537

User Activities: Army - Navy - Air Force - DLA - CS

Review Activities: Army - Navy - Air Force - DLA - CS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:08Z
Check the source to verify that this is the current version before use.