

FED. SUP CLASS
5935




VIEW SHOWING PLUG CAP

MS17350
ADAPTER ASSEMBLY
TYPE A




.062

STAMP PART NUMBER AND MANUFACTURER'S IDENTIFICATION IN APPROXIMATE POSITION SHOWN



VIEW SHOWING RECEPTACLE CAP

MS17349
ADAPTER ASSEMBLY
TYPE B

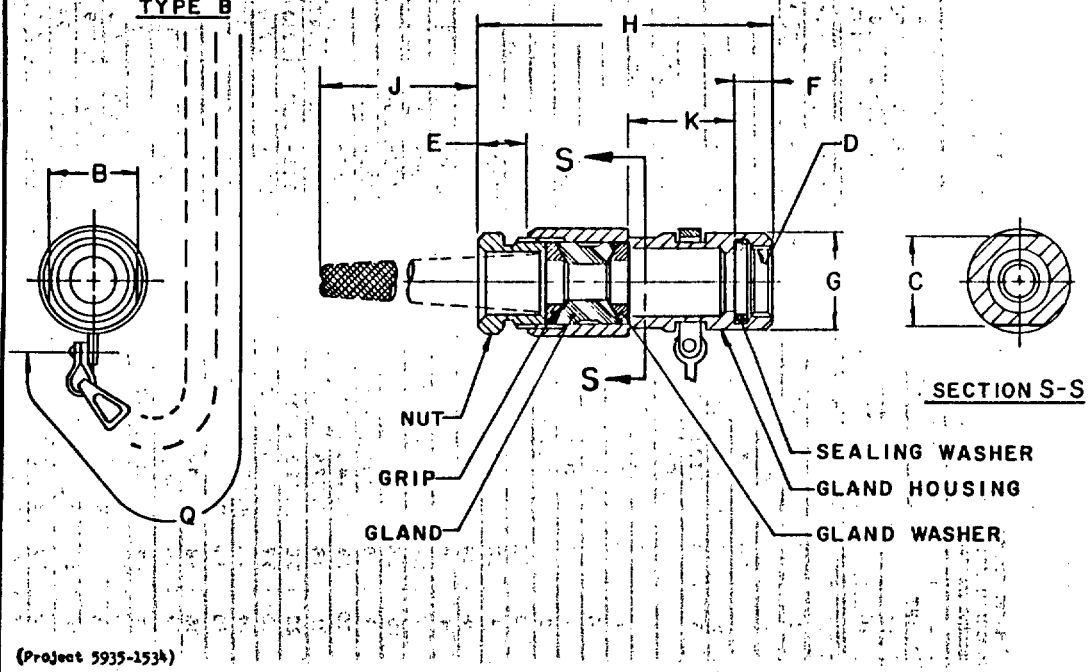

SECTION S-S

(Project 5935-1534)

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF + 11, 17, 85 ↻ 14, 19 Army + EL, MI @ AV Navy + SH, AS, OS @ MC, CG

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 25 May 1967 REVISED

P.A. SH Other Coat EL AF-11	TITLE ADAPTER, (STEP UP) CABLE SEALING & GRIPPING	MILITARY STANDARD MS 90569
PROCUREMENT SPECIFICATION MIL-C-22992	SUPERSEDES:	SHEET 1 OF 3

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF + 11, 17, 85 @ 14, 19 Army + EL, MI @ AV Navy + SH, AS, OS @ MC, CG

DD FORM 1426 672-1 (Coordinated)

PROCUREMENT SPECIFICATION: MIL-C-22992

P.A. SH: Other Cast EL AF-11

SUPERSEDES:

TITLE: ADAPTER, (STEP UP) CABLE SEALING & GRIPPING

MILITARY STANDARD

MS 90569

SHEET 2 OF 3

ADAPT SIZE NO.	SIZE	CABLE RANGE MAX DIA	CABLE RANGE MIN DIA	B +.000 -.010	C +.000 -.010	D THREAD CLASS 2B-LH	E FREE LG MAX	F ±.016	G DIA +.010 -.020	H MAX	J APPROX FREE LENGTH	K +.015 -.025	L THREAD (PLATED) CLASS 2(A OR B)	N DIA MAX	P MAX	Q WITHIN ONE LINK
1	12	.530	.436	1.000	.812	.7500-20UNEF	.597	.479	.938	3.810	4.688	1.219	.8750-0.IP-0.2L-DS	1.094	.765	5.00
2	12	.500	.406	.875	.938	.7500-	.539		.938	3.248	4.344	.871	.8750-	1.094		
3	12	.405	.316	1.000	.812	.7500-	.597		.938	3.810	3.688	1.219	.8750-	1.094		
4	14	.625	.560	1.062	1.125	.8750-			1.062	4.024	6.188	1.371	1.0000-	1.219		
5	14	.605	.511	1.000	1.062	.8750-				3.712	5.138	1.121	1.0000-			
6	14	.530	.436	1.000	1.062	.8750-				3.712	4.688	1.121	1.0000-			
7	14	.405	.316	1.000	1.062	.8750-20UNEF			1.062	3.712	3.688	1.121	1.0000-	1.219	.765	
8	18	.828	.715	1.125	1.250	1.1250-18UNEF			1.312	4.087	6.688	1.343	1.2500-	1.469	.980	
9	20	1.055	.930	1.500	1.375	1.2500-			1.438	4.212	7.688	1.371	1.3750-	1.562		
10	20	1.000	.875	1.500		1.2500-				4.212	7.188		1.3750-			
11	20	.900	.787	1.250		1.2500-				4.150	7.188		1.3750-			
12	20	.750	.637	1.250	1.375	1.2500-			1.438	4.150	6.688		1.3750-	1.562		5.00
13	22	1.109	.984	1.500	1.625	1.3750-			1.562	4.212	7.688		1.5000-	1.688		6.00
14	22	1.000	.875	1.500	1.625	1.3750-			1.562	4.212	7.188	1.371	1.5000-	1.688		
15	24	1.375	1.250	2.000	1.875	1.6250-			1.812	4.275	9.688	1.309	1.7500-	1.938		
16	24	1.310	1.185	1.750		1.6250-					8.688	1.372	1.7500-			
17	24	1.230	1.105	1.750		1.6250-					8.188	1.372	1.7500-			
18	24	1.180	1.055	1.750	1.875	1.6250-18UNEF			1.812	4.275	8.188	1.372	1.7500-	1.938		
19	28	1.531	1.406	2.000	2.062	1.8750-16UN			2.062	4.337	10.688	1.371	2.0000-	2.219		
20	28	1.445	1.320	2.000	2.062	1.8750-16UN			2.062	4.337	9.688	1.371	2.0000-	2.219		
21	28	1.375	1.250	2.000	2.062	1.8750-16UN	.597		2.062	4.337	9.688	1.371	2.0000-	2.219		
22	32	1.825	1.700	2.438	2.312	2.0625-16UN	.710		2.312	4.704	13.688	1.375	2.2500-	2.469		
23	32	1.730	1.605	2.438	2.312	2.0625-	.710		2.312	4.704	13.688	1.375	2.2500-	2.469		
24	32	1.656	1.531	2.250	2.312	2.0625-	.597		2.312	4.399	12.688	1.370	2.2500-	2.469		
25	36	2.062	1.917	2.750	2.500	2.3125-	.710		2.562	4.704	14.188	1.375	2.5000-	2.719		
26	36	1.984	1.859	2.438		2.3125-				4.673	13.688	1.344	2.5000-			
27	36	1.900	1.775			2.3125-							2.5000-			
28	36	1.825	1.700			2.3125-							2.5000-			
29	36	1.730	1.605	2.438	2.500	2.3125-16UN	.710	.479	2.562	4.673	13.688	1.344	2.5000-	2.719		
30	40	2.375	2.230	2.875	2.912	2.6250-16UN	.709	.667	2.873	5.000	18.138	1.421	2.7500-	2.969		
31	40	2.250	2.105	2.750	2.325	2.6250-	.709			5.000	17.138	1.421	2.7500-			
32	40	2.145	2.000	2.750	2.325	2.6250-	.710			4.939	14.188	1.422	2.7500-			
33	40	2.062	1.917	2.750	2.625	2.6250-16UN	.710	.667	2.875	4.939	14.188	1.422	2.7500-0.IP-0.2L-DS	2.969	1.980	6.00

FED. SUP CLASS 5935

APPROVED 25 May 1967 REVISED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.

Reviewer/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS (FSC listing).
AF+11,17,85 @ 14,19 Army+EL,MI @ AV Navy+SH,AS,OS @ MC,CG

This military standard has been approved by the Department of Defense and is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS
5935


REQUIREMENTS:

1. THE ADAPTERS ARE FOR USE WITH CLASS R AND C CONNECTORS SHOWN ON MS17343, MS17344, MS17345 AND MS17347.

2. ADAPTER FINISH SHALL BE DESIGNATED BY THE LETTER C (CONDUCTIVE) OR N (NON-CONDUCTIVE).

3. ADAPTER ASSY TYPE SHALL BE DESIGNATED AS A OR B. TYPE A IS FOR USE WITH CONNECTOR MS17344, TYPE B IS FOR USE WITH CONNECTORS MS17343, MS17345 AND MS17347. ADAPTER, CAP AND CHAIN IS CONSIDERED A COMPLETE ASSEMBLY.

4. PART NUMBER SHALL INCLUDE FINISH, ADAPTER SIZE NUMBER AND TYPE AS SHOWN IN EXAMPLE BELOW:

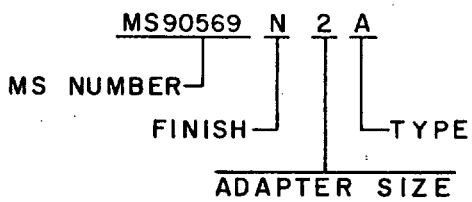

5. CHAIN SHALL BE PASSIVATED CORROSION RESISTANT (STAINLESS) STEEL IN ACCORDANCE WITH TYPE II, CLASS 3, TRADE NUMBER 8 OF RR-C-271 AND SHALL BE WITHIN ONE LINK OF THE LENGTH SPECIFIED HEREIN.

NOTES:

1. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.

2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

3. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED TOLERANCES: DECIMALS ±.016.

4. IT IS INTENDED THAT CONNECTORS AND THEIR ASSOCIATED ACCESSORIES BE OF THE SAME FINISH (SEE REQUIREMENT 4).

APPROVED 25 May 1967 REVISED

P.A. SH Other Cust EL AF-II	TITLE ADAPTER, (STEP UP) CABLE SEALING & GRIPPING	MILITARY STANDARD MS90569
PROCUREMENT SPECIFICATION MIL-C-22992	SUPERSEDES:	SHEET 3 OF 3

DD FORM 1 SEP 67 672-1 (Coordinated)
PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.
*U.S. GOVERNMENT PRINTING OFFICE: 1967-251-520/6722

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:40Z
Check the source to verify that this is the current version before use.