INCH-POUND

MIL-DTL-11484/44G
6 February 2007
SUPERSEDING
MIL-L-11484/44F
10 May 1996

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, GOLD STAR

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and the issue of MIL-DTL-11484.

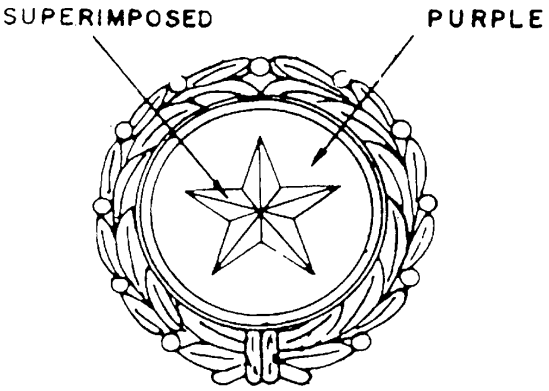

OBVERSE

REVERSE

MATERIAL: Gilding Metal

FINISH:
BASE: Hard Enameled, Gold Plated, Brightly Polished.
STAR: Gold Plated, Mirror-like Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSIONS:
BASE:
DIAMETER: 5/8 inch (1.59 cm) (REF)
THICKNESS (On Enameled Platform): 0.075 inch ± 0.005 inch (0.191 cm ± 0.012 cm)

AMSC N/A FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:18Z
Check the source to verify that this is the current version before use.

STAR:
WIDTH (Across Star Points): 9/32 inch (0.71 cm) (REF)
THICKNESS (At Center): 0.135 inch ± 0.005 inch (0.343 cm ± 0.012 cm)

NOTES:
1. The term (REF) refers to the measurements taken from the Government furnished hub or die.

2. Enameled area shall be purple as indicated. The color shall conform to the TIOH color chip number 22.

3. Epoxy resin (stoning epoxy) may be used in lieu of hard enamel at the option of the manufacturer.

4. The star shall be attached as shown to the base by soft soldering or by riveting. If riveting is used, two rivets shall be required.

5. The reverse side shall have the following inscriptions in block capital letters 3/64 inch (0.12 cm) high. When viewed by an observer, the lettering shall be raised and located along two circular arcs. The outer arc shall have the words "UNITED STATES OF AMERICA" on the left and the words "ACT OF CONGRESS" on the right. The inner arc shall have the words "AUGUST 1966" on the left. The top of the lettering in the inner arc shall be approximately 1/32 inch (0.08 cm) in from the outer edge. No reverse hub shall be furnished. Lettering shall be cut into the reverse die.

6. Attaching device shall be prong with pick and flat ball type clutch. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

7. In packaging, each finished lapel button shall be mounted on a polyethylene pad 15/16 inch (2.38 cm) square and place in a two piece plastic box. The box shall have an opaque bottom and a transparent top. The box shall have a double hinge on the back and a single catch on the front.

CHANGES FROM PREVIOUS ISSUE: Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodians:
Army - IH
Air Force - 11
Navy - NU

Preparing activity:
Army - IH

Review activities:
Air Force - 99
Navy - MC
Coast Guard - CG
DLA - CT

(Project No. 8455-2007-023)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at http://assist.daps.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:18Z
Check the source to verify that this is the current version before use.