NOT MEASUREMENT SENSITIVE


MIL-DTL-11484/44K
7 November 2022
SUPERSEDING
MIL-DTL-11484/44J
26 December 2017

DETAIL SPECIFICATION SHEET

LAPEL BUTTON, GOLD STAR

This specification is approved for use by all
Departments and Agencies of the Department of Defense

The requirements for acquiring the product described herein shall consist of this specification sheet and the latest issue of MIL-DTL-11484.

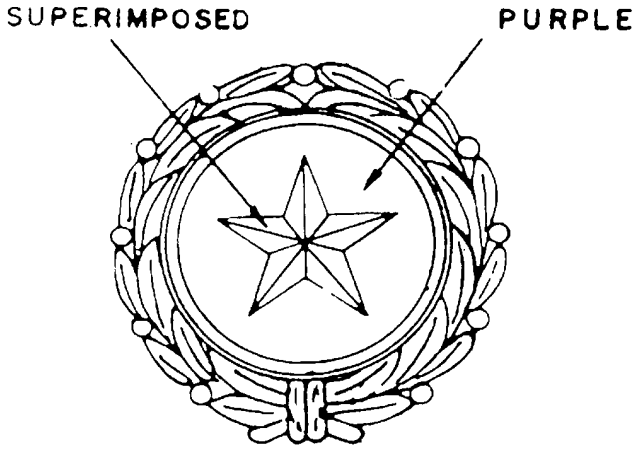



MATERIAL: Red Brass 85/15 (UNS Alloy No. C-230)

FINISH:
BASE: Epoxy resin 24K Gold Plated, Mirror-like, Polished and shall match The Institute of Heraldry (TIOH) Metal Finish Chip Number 6.
STAR: 24K Gold Plated, Mirror-like, Polished and shall match TIOH Metal Finish Chip Number 6.

DIMENSION:
BASE:
DIAMETER: 5/8 inch (REF)
THICKNESS (On epoxy platform): 0.075 inch $\pm$ 0.010 inch

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:18Z
Check the source to verify that this is the current version before use.

STAR:
WIDTH (Across star points): 9/32 inch (REF)
THICKNEST (At center): 0.135 inch ± 0.010 inch

ATTACHING DEVICE:
1. Attaching device shall be prong with pick and flat ball type clutch

2. The prong shall be centered on the reverse side and fused or soldered to the lapel button.

NOTES:
1. The term (REF) refers to the measurements taken from the obverse Government furnished hub or die.

2. The star shall be attached as shown to the base by soft soldering or by riveting. If riveting is used, two rivets shall be required.

3. The reverse side shall have the following inscriptions in block capital letters 3/64 inch high. When viewed by an observer, the lettering shall be raised and located along two circular arcs. The outer arc shall have the words "UNITED STATES OF AMERICA" on the left and the words "ACT OF CONGRESS" on the right. The inner arc shall have the words "AUGUST 1966" on the left. The top of the lettering in the inner arc shall be approximately 1/32 inch in from the outer edge. No reverse hub shall be furnished. Lettering shall be cut into the reverse die.

4. In packaging, each finished lapel button shall be mounted on a polyethylene pad 15/16 inch square and place in a two piece plastic box. The box shall have an opaque bottom and a transparent top. The box shall have a double hinge on the back and a single catch on the front.

5. These item are not authorized for commercial sale, and may be produced only under government contract and at the request of Department of the Army and U.S. Coast Guard.

EPOXY: Epoxy resin shall be applied to the lapel button as indicated above, and shall match TIOH Hard Enamel Color Chip Numbers listed below.

TIOH HARD ENAMEL COLOR CHIPS	
COLOR	**CHIP NUMBER**
Purple	#22

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:18Z
Check the source to verify that this is the current version before use.

CHANGES FROM PREVIOUS ISSUE: The margins of this specification are marked with vertical lines to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Army - IH
Navy - CG1

Preparing activity:
Army - IH

Review activity:
DLA - CT

(Project No. 8455-2023-011)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T16:18Z
Check the source to verify that this is the current version before use.