MILITARY SPECIFICATION SHEET

CONNECTORS, PRINTED CIRCUIT SUBASSEMBLY AND ACCESSORIES PLUG 17, 29, 41, 53, AND 65 CONTACT POSITIONS FOR PRINTED WIRING BOARDS 2.54 MM X 1.27 MM OFFSET GRID, METRIC

This specification is approved for use by US Army Communications Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the connector described herein shall consist of this specification sheet and the latest issue of MIL-C-55302.

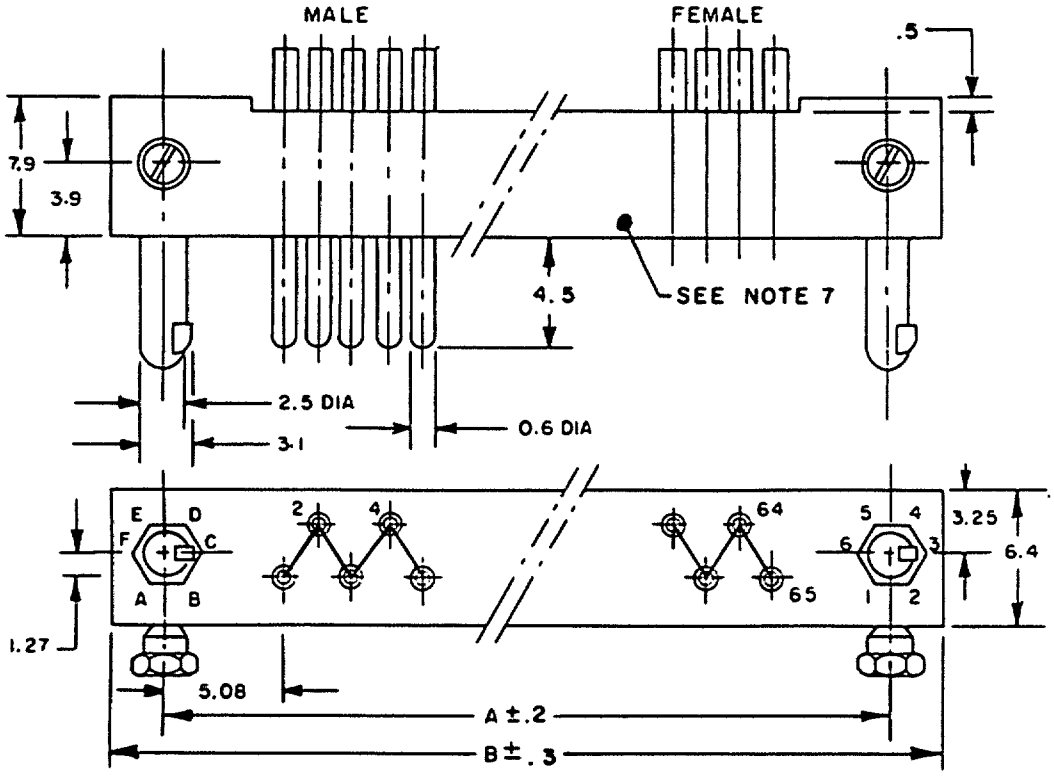


TABLE I. Contacts

Number of contacts	A	B
17	30.5	38.5
29	45.7	53.7
41	60.9	69.0
53	76.2	84.2
65	91.4	99.5

MM	INCHES	MM	INCHES
0.2	.008	6.4	.252
0.3	.012	7.9	.311
0.5	.020	30.5	1.200
0.6	.023	38.5	1.515
1.27	.050	45.7	1.799
2.5	.098	53.7	2.114
3.1	.122	69.0	2.716
3.25	.128	76.2	3.000
3.9	.153	84.2	3.314
4.5	.171	91.4	3.598
5.08	.200	99.5	3.917

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 1. Connector plug.

(B) denotes changes

FSC 5935
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
https://assist.dla.mil - Downloaded: 2026-10-22T22:54?
Check the source to verify that this is the current version before use.

TERMINAL STYLES


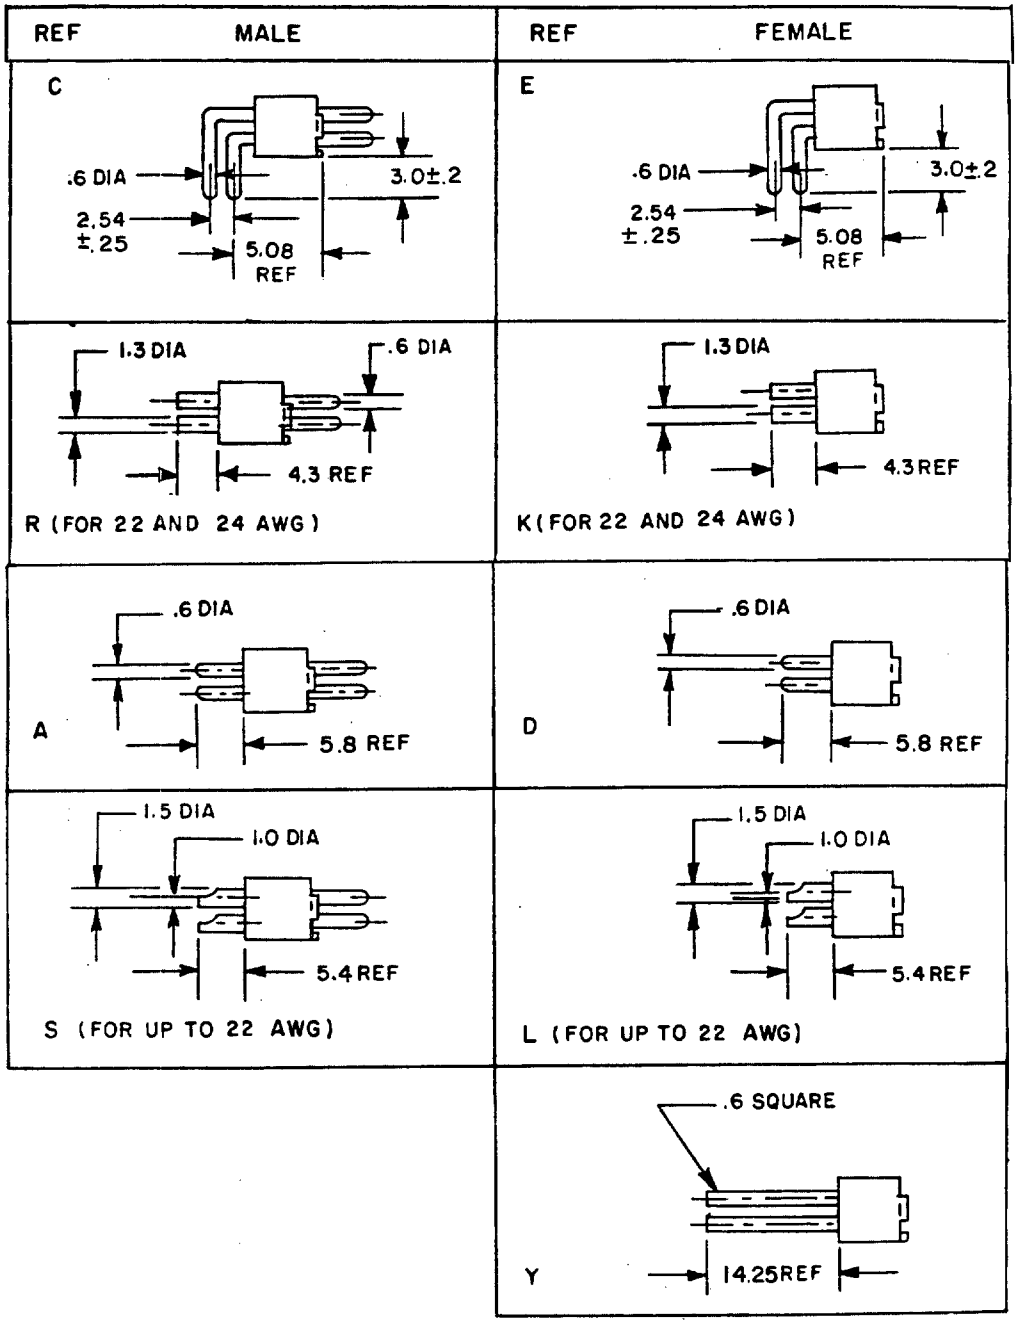


FIGURE 2. Connector termination styles.

Source: https://assist.dla.mil --Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

TERMINAL STYLES

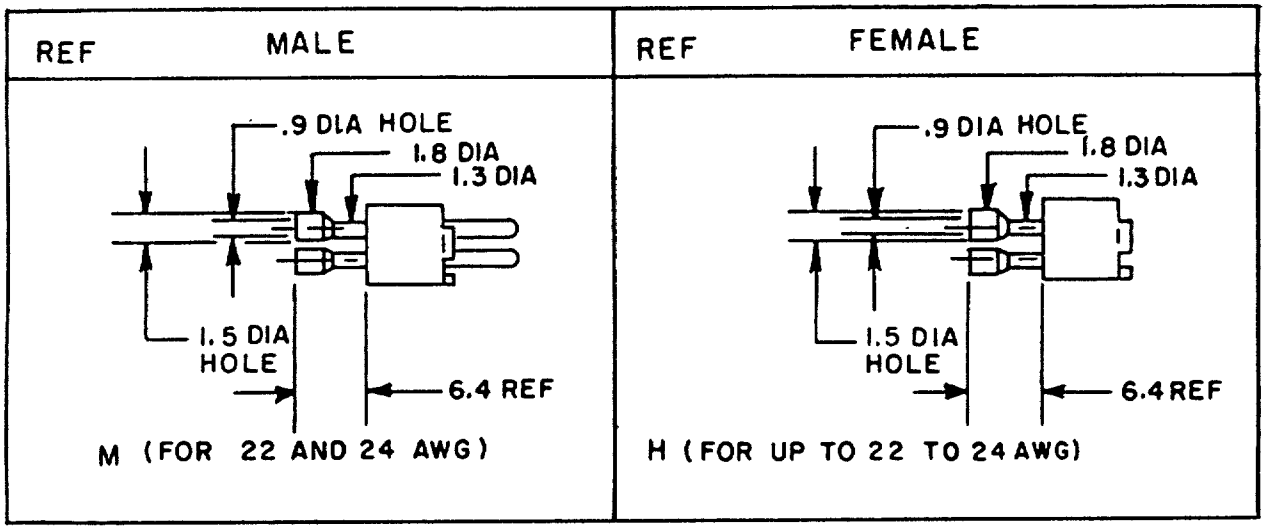

MM	INCHES
0.2	.008
0.25	.010
0.6	.023
0.9	.035
1.0	.039
1.3	.051
1.5	.059
1.8	.071
2.54	.100
3.0	.118
4.3	.169
5.08	.200
5.4	.212
5.8	.228
6.4	.252
14.25	.561

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 2. Connector termination styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.


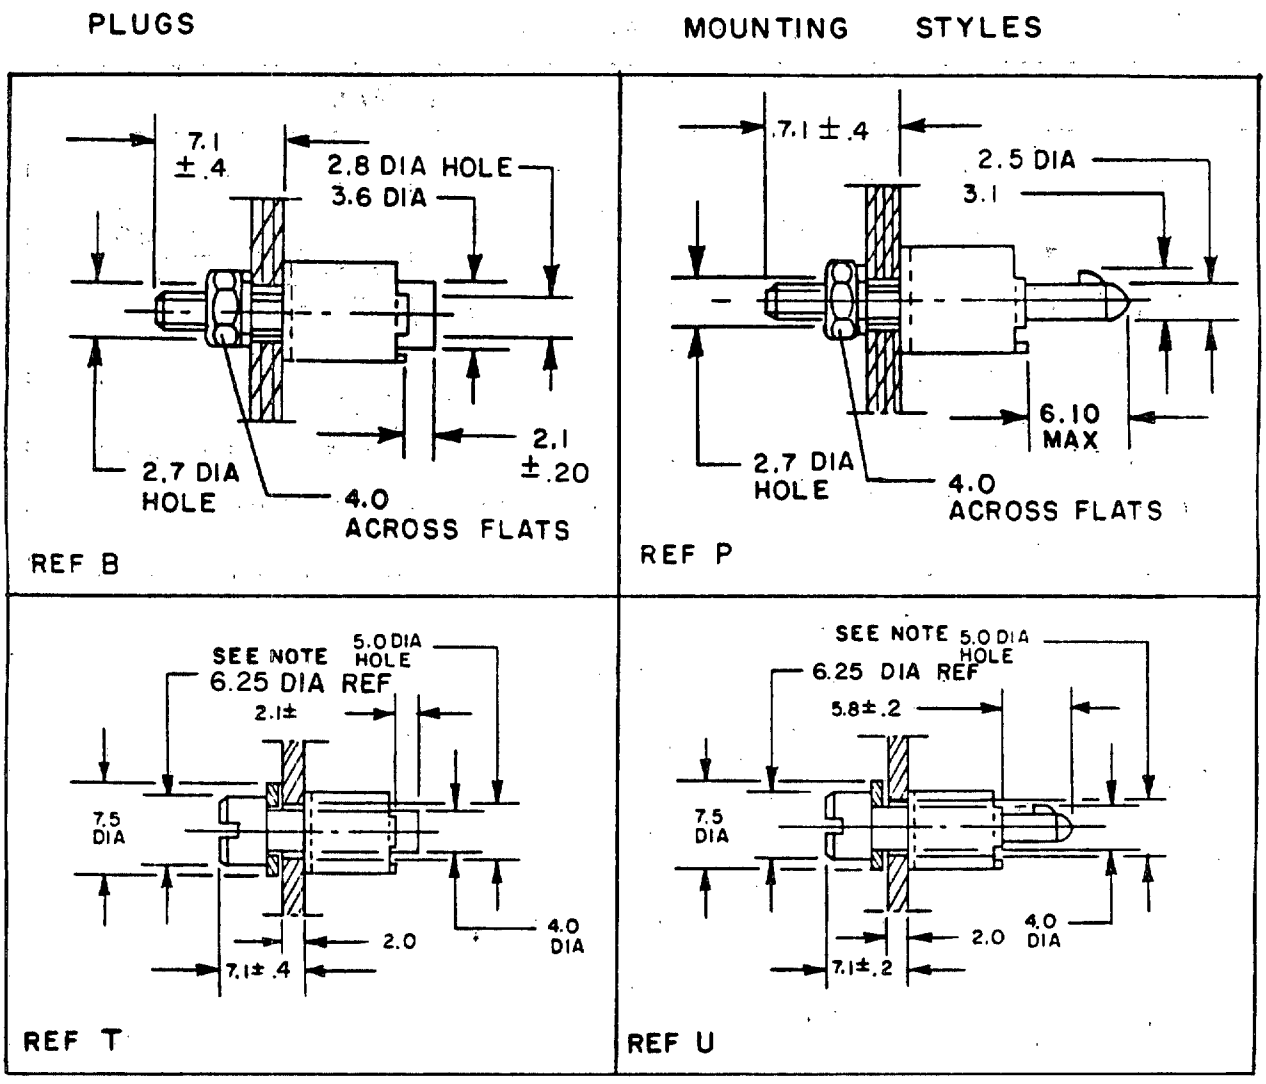


FIGURE 3. Mounting styles.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

PLUGS MOUNTING STYLES

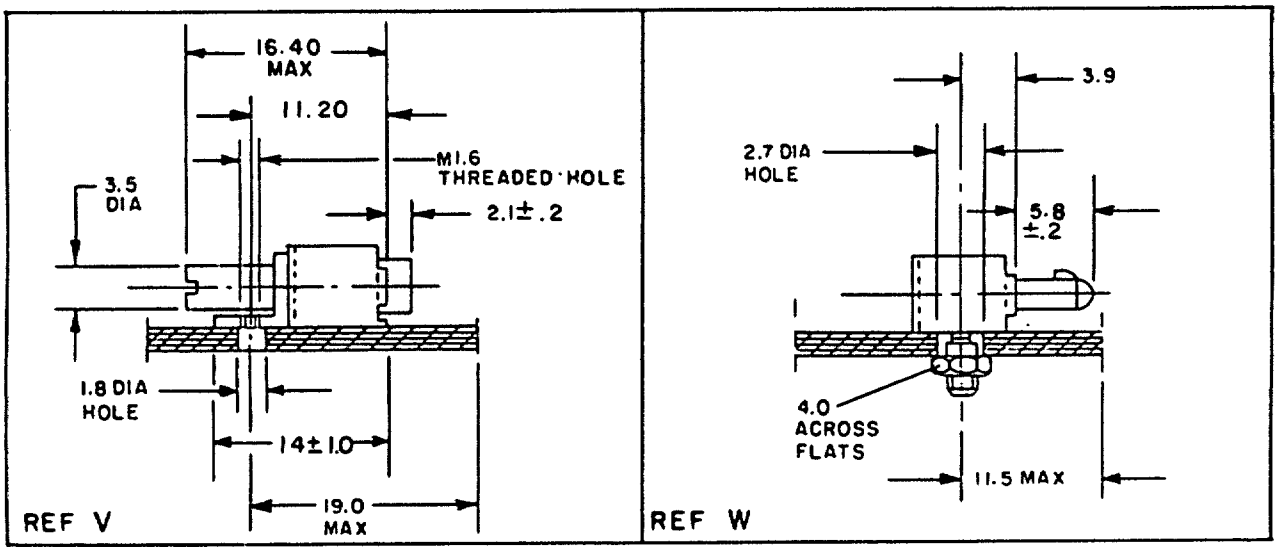

MM	INCHES	MM	INCHES
0.2	.008	3.5	.137
0.4	.016	3.6	.141
1.0	.039	3.9	.153
1.6	.063	4.0	.157
1.8	.071	5.0	.197
2.0	.078	5.8	.228
2.1	.082	6.10	.238
2.5	.098	7.1	.279
2.7	.106	7.5	.295
2.8	.110	11.20	.441
3.1	.122	11.5	.453
		14.0	.551
		16.40	.640
		19.0	.748

NOTES:
1. Dimensions are in millimeters.
2. Inch equivalents are given for general information only.

FIGURE 3. Mounting styles - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

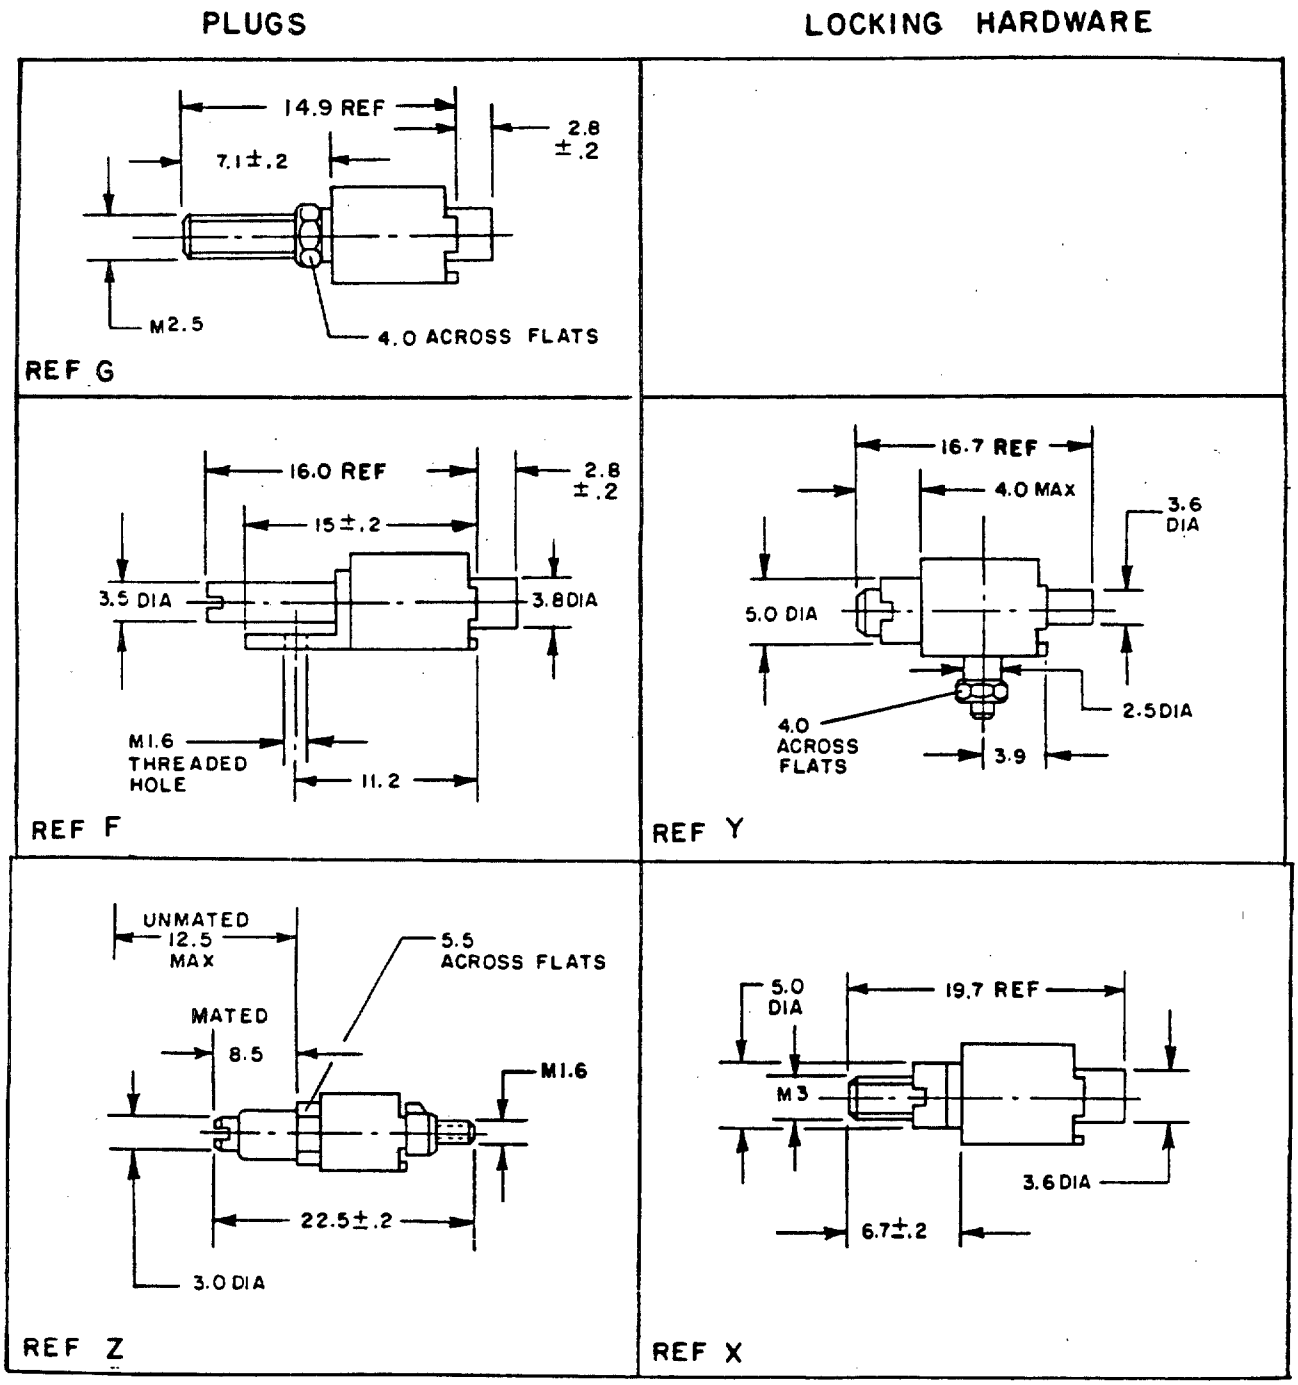


FIGURE 4. Locking hardware.

Source: https://assist.dla.mil - Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

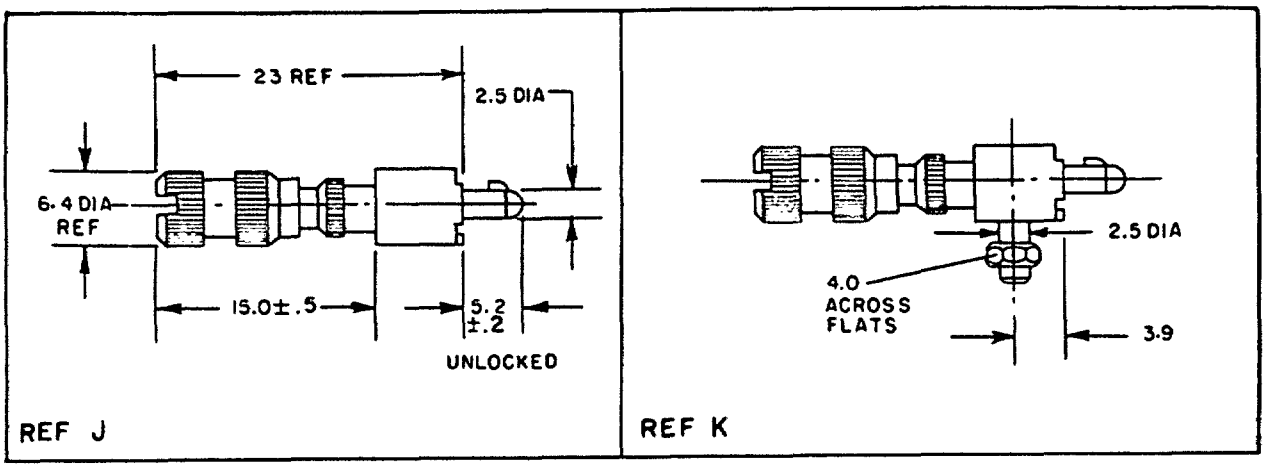


TABLE I. MATING REFERENCES

TYPE	WILL ONLY MATE WITH	LOCKING METHOD
B	P,U,W	NONE
F	J,I	PUSH, 1/4 TURN
G	J,K	PUSH, 1/4 TURN
J	F,G	PUSH, 1/4 TURN
K	F,G	PUSH, 1/4 TURN
P	B,T,V	NONE
T	P,U,W	NONE
U	B,T,V	NONE
V	P,U,W	NONE
W	B,T,V	NONE
X	Z	SCREW
Y	Z	SCREW
Z	X,Y	SCREW

MM	INCHES	MM	INCHES
0.2	.008	5.5	.216
0.5	.022	6.4	.252
1.6	.063	6.7	.263
2.5	.098	7.1	.279
2.8	.110	8.5	.334
3.0	.118	11.2	.441
3.5	.137	12.5	.492
3.6	.141	14.9	.586
3.8	.149	15.0	.590
3.9	.153	16.0	.630
4.0	.159	16.7	.657
5.0	.197	19.7	.775
5.2	.204	22.5	.886
		23.0	.905

NOTES:
1. Dimensions are in millimeters.
2. This is a metric design. Inches are to the closest .001.
3. Unless otherwise specified, tolerance is ±.1 (.004 inch).
4. These connectors mate with DOD-C-55302/160.
5. Inch equivalents are given for general information only.
6. See table for mating.
7. Contact identification may be located adjacent to cavity on surface indicated.

FIGURE 4. Locking hardware - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configurations: See figures 1 through 4.

Material:

Insulators: Diallyl phthalate per MIL-M-14.

(B) Guides and hardware: Brass per QQ-B-626, nickel plated per QQ-N-290, or A151 303 stainless steel or equivalent per QQ-S-764, passivated per QQ-P-35.

Contact identification: See figure 1.

(B) Contact engagement and separation forces:

Minimum force .5 ounce with a .0220 ±.0001 ø pin.
Maximum force 1.6 ounces with a .0230 ±.0001 ø pin.

Note: Pin roughness to be .25 - 2.5 microns surface.

Mating and unmating: The maximum force shall not exceed 2 ounces (56 grams) multiplied by the number of positions.

Contact retention minimum: 8 pounds (3.6 kg) minimum.

Current rating: 5 amperes per line.

Durability: 2,000 cycles minimum.


Dielectric withstanding voltage:

Sea level: 1,400 Vac (rms) test, or equivalent dc voltage (2,000 volts).

(B) High altitude: 300 Vac (rms) test.

Keying: Rotation of guides - 6 positions each, 36 possible combinations.

Connector part number:

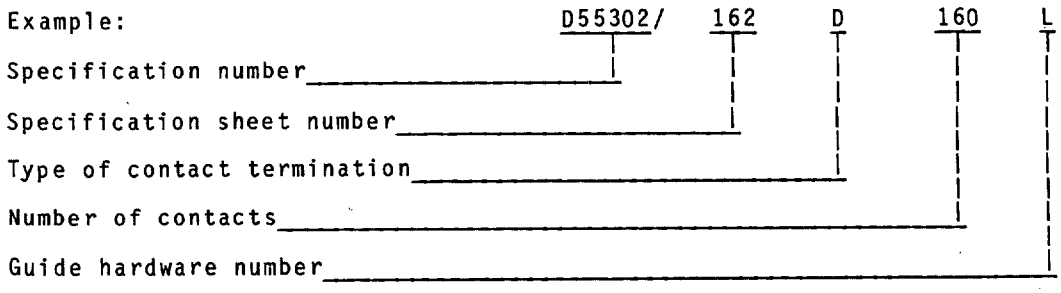

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.

Custodian:
Army - CR

Review activities:
Army - AR, MI
DLA - ES

User activities:
Army - ME, AT, AV

Agent:
DLA - ES

Preparing activity:
Army - CR

(Project 5935-A256-4)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:54Z
Check the source to verify that this is the current version before use.