INCH-POUND

MIL-P-50323C (AR)
22 November 1990
SUPERSEDING
MIL-P-50323B (MU)
30 November 1980

MILITARY SPECIFICATION

POWER SUPPLY: 11834450

(KLYSTRON BEAM)

This specification is approved for use within the U.S. **Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.**

1. SCOPE

1.1 Scope. This specification covers a klystron beam power supply used in Test Set Subassembly MX-8047/TPM-22A, part of Radar Test Set AN/TPM-22A, and in Receiver-Transmitter RT-860/VPS-2, part of Radar Set AN/VPS-2 (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-F-13926 - Fire Control Material, General Specification Governing the Manufacture and Inspection of

Beneficial comments (recommendations, additions, deletions)and any pertinent data which may be of use in improving this document should be adressed to: Commander, U.S Army ARDEC, ATTN:SMCAR-BACS, Picatinny Arsenal, New Hersey 07806-5000 by using the self- adressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 1285

DISTRIBUTION STATEMENT A Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

MIL-I-45607 - Inspection Equipment, Aacquisition, Maintenance and Disposition of

STANDARDS

MILITARY

MIL-STD-109 Quality Assurance Terms and Definitions
MIL-STD-810 Environmental Test Methods and Engineering Guidelines
MIL-STD-2000 Standard Requirements for Soldering Electrical and Electronic Assemblies

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization, Documents Order Desk, Bldg. 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.1.2 Other Government documents drawing, and publications. The following other Government documents, drawings, and publications form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS (see 6.5)

U.S. ARMY ARMAMENT RESEARCH, DEVELOPMENT AND ENGINEERING CENTER (ARDEC)

11731151 Spark Gap
11825858 Cable Assembly, High Voltage
11834450 Power supply, Klystron Beam

PACKAGING DATA SHEET

PS11834450 Packaging of Klystron Beam Power supply

(Copies of drawings publications, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

2.2 order of precedence. In the event of conflict between the text of this specification and the references cited herein the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Components and assemblies. The components and assemblies shall comply with all requirements specified on Drawing 11834450, all associated drawings, and with all requirements specified in applicable specifications and standards. Where applicable, the klystron beam power supply shall meet the requirements of MIL-F-13926 as follows:

a. Dimensions and **tolerances.**
b. **Inorganic protective surface finishings.**
c. **Part identification and marking.**
d. **Workmanship.**

3.3 Environmental service conditions.

3.3.1 Vibration. The klystron beam power supply shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to sinusoidal vibrations, in each of three mutually perpendicular axes, as follows:

Frequency Range	Amplitude
10 **to 15** hertz	0.06 inches double amplitude
15 to 25 hertz	0.04 inches double amplitude
25 to 55 hertz	**0.02 inches double** amplitude

The frequency of vibration shall be swept logarithmically.
The cycling time shall be 120 minutes per axis.
The sweep rate shall be 3.75 minutes ± 10% per decade.
The 10-55-10 hertz sweep time is 3 minutes 45 seconds ± 10%.

3.3.2 Shock. The klystron beam power supply shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after exposure to a total of 18 impulse shocks consisting of three shock impulses of 15 g's ± 10%, 11 milliseconds ± 10%, half-sine wave applied in each direction of 3 mutually perpendicular axes.

3.3.3 Altitude.

3.3.3.1 **Operating. The klystron beam power supply shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches of Hg).**

3.3.3.2 Non-operating. The klystron beam power supply shall meet the requirements of 3.4 and 3.5 after exposure for not less than 10 minutes to barometric pressure encountered at 40,000 feet above sea level (5.5 inches of Hg).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.3.4 Temperature.

3.3.4.1 Operating. The klystron beam power supply shall meet the requirements of 3.4 and 3.5 **when stabilized thermally at any temperature between** -40 **deg.F** and +155 **deg.F.**

3.3.4.2 Non-operating (storage). The klystron beam power supply shall not suffer permanent damage when subjected to the constant temperature extremes of -60 deg.F for a period of 24 hours and +160 **deg.F for a period of 4 hours (after temperature stabilization), and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.**

3.3.5 Humidity (non-operating) The klystron beam power supply shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with a relative humidity in excess of 95 percent for a period of 10 days.

3.4 Electrical.

3.4.1 Continuity. Each conductor shall be continuous electrically as specified on the schematic diagram of the klystron beam power supply.

3.4.2 Resistance. With no voltage applied, resistance between J1-A and J1-D shall be 5.6 kilohms ± 10 percent; between J1-A and J2 shall not be less than 10 megohms.

3.5 Performance. See 6.3 (High voltage warning)

3.5.1 Voltage breakdown. The output cable and circuitry shall withstand a voltage of 11.25 kilovolts direct current (kVdc) applied between J2(-) 1 / and J1-A(Ret). Voltage breakdown shall occur only with the externally attached spark gap when voltage is applied to J2(-) and J1-A(Ret) is greater than 11.25 kVdc and less than 13.75 kVdc. The klystron beam power supply shall show no evidence of damage and shall function as described in 3.5.2 when test voltage is removed from J2 and J1-A.

---

1 / The information in parenthesis refers to the polarity applied to this terminal. This notation is used throughout this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.5.2 High voltage output. Voltage between J2(-) and J1-A(Ret) shall be 9.0 +0.5/-o.o kvdc, alternating current (at) ripple less than 0.8 volts (V peak-to-peak when the following conditions exist:

a. Internal connection between J1-B and T1-4.

b. 1.1 megohm resistive load between J2 and J1-A.

c. 190 V peak-to-peak square wave applied between J1-B and J1-C.

3.5.3 Test point TP2. Voltage between TP2(-) and J1-A(Ret) shall be 36 ± 2 Vdc under conditions stated in 3.5.2.

3.6 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection in accordance with the technical provisions herein (see 4.3).

3.7 Soldering. The Klystron beam power supply shall be soldered per general requirements tasks A, C, and D of MIL-STD-2000.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of Sections 3 and 5 and all applicable drawings. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements In the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.1.2 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Reference shall be made to MIL-STD-109 to define quality assurance terms used herein.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. **First article inspection (see 4.3).**
b. Quality conformance inspection (see 4.4).
c. Special sampling inspection (see 4.5).

4.2.1 Inspection conditions. Unless otherwise specified, all examinations and tests shall be conducted at the following standard ambient conditions:

a.	**Temperature**	**+50 deg to +90 deg F.**
b.	**Relative humidity**	**90% RH Max.**
c.	**Pressure**	**28 to 32 inches of Hg.**

4.3 First article inspection.

4.3.1 First article submission. The contractor shall submit a first article sample as designated by the contracting officer consisting of three klystron-beam power supplies for-inspection in accordance with 4.3.2.

4.3.2 Inspections to be performed. First article assemblies components and test specimens may be subjected by the Government to any or all of the examinations and tests specified in Table I and Table II herein and to any or all requirements of the applicable drawings.

4.3.3 Rejection. If any assembly, component or test specimen fails to comply with any of the applicable requirements, the first article sample shall be rejected. The Government reserves the right to terminate its inspection upon any failure of any assembly, component or test specimen to comply with any of the stated **requirements.**

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. The **term "inspection lot" is defined as a homogeneous collection of units of product from which a representative sample is drawn or which is inspected 100** percent to determine conformance with applicable requirements. Units of product selected for inspection shall represent only the inspection lot from which they are drawn and shall not be construed to represent any prior or subsequent quantities presented for inspection. Homogeneity shall be considered to exist provided the inspection lot has been produced by one manufacturer, in one unchanged process, using the same materials and methods, in accordance with the same drawings, same drawing revisions, same

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

specifications and same specification revisions. All material submitted for inspection in accordance with this specification shall comply with the homogeneity criteria specified herein, regardless of the type of inspection procedure which is being applied to determine conformance with requirements.

4.4.2 Examinations and tests.

4.4.2.1 Components, assemblies and subassemblies. All components, assemblies and subassemblies shall be inspected in accordance with the inspection provisions contained in this specification and the Quality Assurance Provisions (QAP) listed in the Technical Data Package (TDP). In the absence of QAPs, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.4.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with the sampling plans specified in 4.4.2.3 herein. Examination and test for packaging and marking shall be in accordance with Section 5 herein. The tabulated classification of defects in 4.4.2.3 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.4.2.3 Functional tests. The tests in Table I shall be performed on a 100% basis.

TABLE I. Functional tests.
(100% Inspection)

CHARACTERISTIC		REQUIREMENT	TEST PROCEDURE
Critical:		None	N/A
Major:			
101.	Electrical	3.4	4.7.2
102.	Performance	3.5	4.7.3
Minor:		None	N/A

4.5 Special sampling. One klystron beam power supply out of the first 50 produced and one out of each 100 produced thereafter shall be selected at random. The sample shall have met the requirements and tests of Table I and shall then meet the tests in Table II. Unless otherwise specified in the contract the items shall be returned to the lot upon successful completion of testing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE 11. Special sampling

CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
Critical:	None	N/A
Major:-		
103. Vibration	3.3.1	4.7.1.1
104. Shock	3.3.2	4.7.1.2
105. Altitude	3.3.3	4.7.1.3
106. Temperature	3.3.4	4.7.1.4
107. Humidity	3.3*5	4.7.1.5
Minor:	None	N/A

4.5*1 Failure of sample. Should any one item of a special sampling fail to meet any of the specified test requirements acceptance of the product shall be suspended by the Government until necessary corrections to all production since the last test as well as to current production has been accomplished in accordance with the provisions of the contract.

4.6 Inspection equipment.

4.6.1 Government-furnished inspection equipment Where the contract provides for Government-furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

4.6.2 Contractor-furnished inspection equipment

4.6.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment identified by drawing number in specifications or QAPs forming a part of the contract shall be supplied by the contractor in accordance with the design specified. The contractor may, however, propose alternatives to Government designs for approval in accordance with 6.4.

4.6.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Methods of Inspection" specified in 4.7 of this specification and with the component inspection procedures specified in "Examination and "Test Facilities" requirements of MIL-F-13926 whenever Government designs are not specified (see 4.6.2.1). Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended. this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nnonconforming. ConStruction

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

shall be such as to facilitate routine calibration of test equipment. Contractor inspection equipment designs shall be submitted for approval in accordance with 6.4.

4.6.2.3 Test equipment. In conjunction with 4.6.2.1 and 4.6.2.2, the test equipment listed in Table III shall be used in the performance of the applicable test methods and procedures as specified in 4.7.

TABLE 111. Test equipment list

ITEM NUMBER	DESCRIPTION
1. Voltmeter	Dc, 0 volts to greater than 300 volts at 20,000 ohms/volt, accuracy of 3%.
2. Power Supply	Dc, -8 to -18.0 kv; automatic overcurrent disconnect at greater than 2 mA, positive output terminal grounded.
3. Ohmmeter	To measure continuity or infinity.
4. Resistive Load	l.l megohms, 250 watts, 10,000 volts.
5. Power Supply	Square wave, 190 volts peak-to-peak, 3700 Hz at 1.3 A.
6. Voltmeter	H.V. dc, 8 to 18 kVdc, electrostatic deflection, accuracy of 2%.
7. Oscilloscope	Vertical sensitivity: 0.2 to 50 V per division. Horizontal deflection: 10 us per division. Input impedance including probe: 100 megohms. Probe attenuation: Xl000. Vertical passband: dc to 10 MHz.
8. Capacitor	.02 uF, 20 kvdc.
9* Resistors (4)	470 kilohms, 1/2 W, 10%
10. Spark Gap	11731151
11. Cable Assembly	Hi-Voltage, 11825858.

4.7 Methods of inspection.

4.7.1 Environmental. Environmental tests shall be conducted in accordance with the test conditions, general test performance guidance, and individual test methods of MIL-STD-810 except as specified herein. Test facilities, chambers and apparatus used in conducting the tests contained in this specification shall be capable of meeting the conditions required.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.1.1 **Vibration. The test shall be performed as specified in Method 514, Category 8, Procedure I, of MIL-STD-810 as modified by 3.3.1 herein. In Step 1 of Procedure I only steps 4 through 8 of paragraph II-2.1 apply. The klystron beam power supply shall be attached to the vibration generator directly or with a fixture, and securely held by its normal means of attachment. After vibration, the klystron beam power supply shall be tested as specified in 4.7.2 and 4.7.3 herein to determine compliance with 3.3.1.**

4.7.1.2 Shock. This test shall be performed as specified in procedure I, Section II of Method 516 of MIL-STD-810 except that:

a. The post test functional check (Step 5 of Procedure I) need not be conducted until completion of all shock impulses.

be **The shock pulses shall be 15 g's ± 10% amplitude and 11 ms ± 10% duration.**

c. **The maximum g** shall occur at 5.5 milliseconds ± 10%.

d. The shock measuring system shall have a flat frequency response within ± 10% from 20 to 2,000 hertz.

After the application of all the shock impulses, the klystron beam power supply shall be tested as specified in 4.7.2 and 4.7.3 to determine compliance with 3.3.2.

4.7.1.3 Altitude (operating and non-operating). This test shall be performed as specified in procedures II and III, Method 500 of MIL-STD-810 . The operational checkout shall be as specified in 4.7.3 for compliance with 3.3.3.

4.7.1.4 Temperature.

4.7.104.1 High (operating and non-operating) This test shall be performed as specified in Procedures I and 11, Method 501 of MIL-STD-810 with constant temperature extremes as specified in 3.3.4. The operational checkout shall **be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.4.**

4.7.1.4.2 Low (operating and non-operating) This test shall be performed as specified in procedures I and II, Method 502 of MIL-STD-810 with constant temperature extremes **as** specified in 3.3.4. The operational checkout shall be as specified in 4.7.2 and **4.7.3 for compliance with 3.3.4.**

4.7.1.5 Humidity (non-operating) **This test shall be performed in accordance with Procedure 111, Method 507 of MIL-STD-810 except that in Step 7, checkout shall be performed at the conclusion of the test only, with the item at standard ambient conditions. The operational checkout shall be as specified in 4.7.2 and 4.7.3 for compliance with 3.3.5.**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.7.2 Electrical.

4.7.2.1 Continuity. Continuity shall be inspected with no power applied to the unit by standard measuring equipment (SME) and visual examination for compliance with 3.4.1.

4.7.2.2 Resistance. Resistance shall be measured with no power applied to the unit using an ohmmeter (Table III, item 3) for compliance with 3.4.2.


4.7.3 Performance. The selected klystron beam power supplies shall be tested as follows:

WARNING: The following procedures require the application of voltages that are dangerous to life. These procedures shall not be performed until after the performance of the continuity inspection and resistance measurements specified in 4.7.2.1 and 4.7.2.2.

4.7.3.1 Voltage breakdown. Connect power supply (Table 111, item 2) and spark gap (Table III, item 10) between J2(-) and J1-A(Ret), as shown in Figure 1. Vary output of power supply from 8 kVdc to 13.75 kVdc with current limit set for 2.0 milliamperes (mA). Verify that power supply (Table III, item 2) overcurrent relay is actuated (indicating spark gap breakdown) at a voltage greater than 11.25 kVdc and less than 13.75 kVdc.


4.7.3.2 **High voltage output. Connect test equipment to klystron beam power supply as shown in Figure 2. Verify by visual observation that wire from J1-B is connected to T1-4. Turn on power supply (Table III, item 5) and verify that input voltage between J1-B and J1-C is 190 V peak-to-peak square wave. Verify, using** voltmeter (Table **111,** item 1), that voltage between TP2(-) and J1-A(Ret) is 36 ± 2 Vdc. Verify, using voltmeter (Table III, item 6), that voltage between J2(-) and J1-A(Ret) is 9.0 kVdc +0.5/-0.0 kVdc. Verify, using oscilloscope (Table III, item 7), that ac ripple between points X and Y on Figure **2 is less than 0.8 V peak-to-peak, including spikes above 10 kilohertz (kHz).**

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

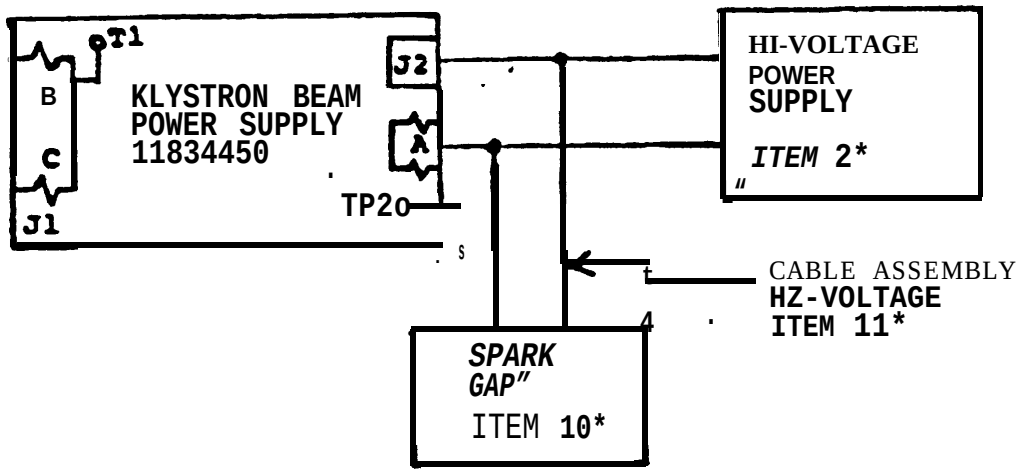

• *Refer* to *4.6.2.3*

FIGURE 1. Klystron beam power supply voltage breakdown test setup.

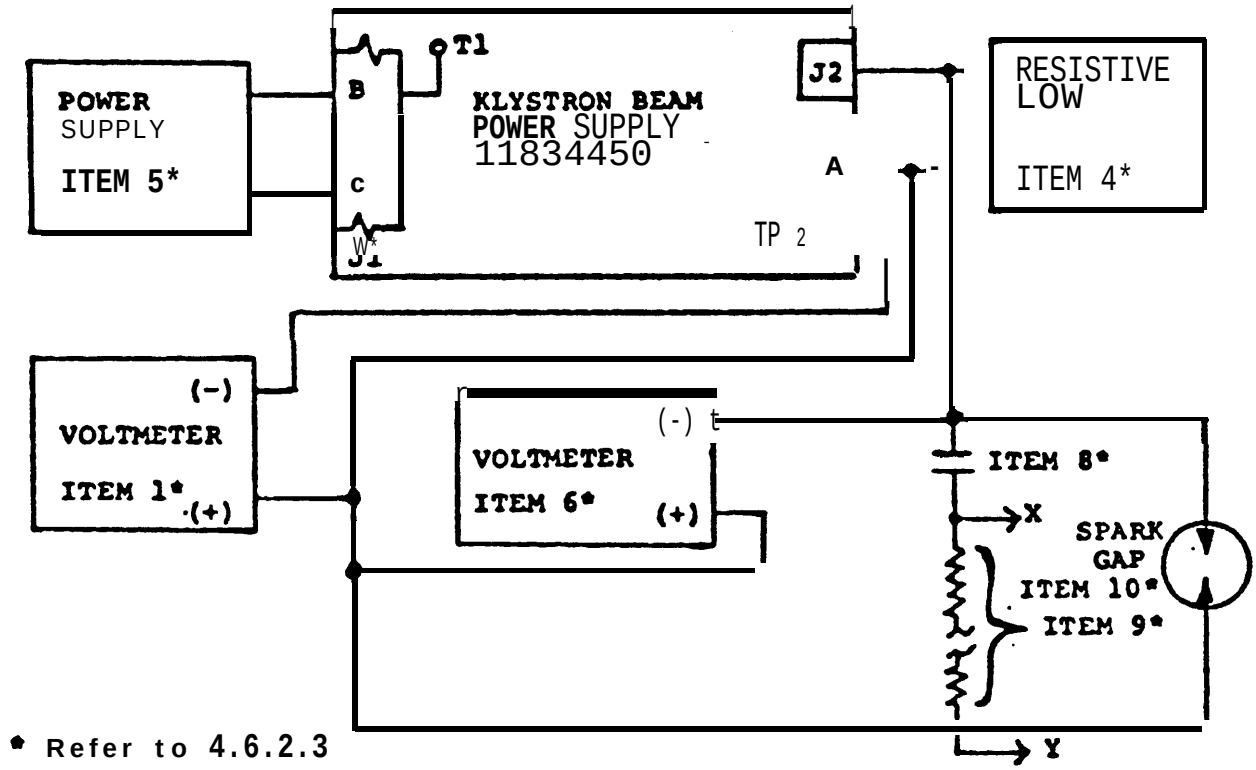

* Refer to 4.6.2.3

FIGURE 2. Klystron beam power supply test setup.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.8 Soldering. Soldering processes shall be inspected by certified inspectors to the **requirements and acceptance criteria of MIL-STD-2000 as specified in 3.7.**

5. PACKAGING

5.1 General. Preservation, packing, and marking shall be in accordance with Packaging Data Sheet PS11834450. The level of protection shall be **as** specified **in the** procurement document.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. **The klystron beam power supply is used in Receiver-Transmitter RT-860/VPS-2, part of Radar Set AN/VPS-2, and in Subassembly Test Set MX-8047/TPM-22, part of Radar Test Set AN/TPM"22A. The klystron beam power supply provides an output voltage in the range of -9 kv which is employed as the beam accelerating potential by the Klystron Power Amplifier Assembly. In the test set, the beam power supply is identical and is used to check performance of the transmitter of Radar Set AN/VPS-2.**

6.2 Acquisition requirements. procurement documents shall specify the following:

6.2.1 Procurement requirements.

a. Title, number and date of this specification.
b. **Applicable stock number.**
c. **First article sample requirements.**
d. **Packaging requirements, if other than specified in** Section 5.
e. Serialization requirements, if applicable.
f. Certification of conformance for each lot of shipment of product.

6.3 High voltage warning. High voltages, dangerous to life, are present when the klystron beam power supply is under test. Death on contact may result from failure to observe safety precautions. Continuity inspection and resistance tests specified in 4.7.2.1 and 4.7.2.2 shall be performed prior to activation of high voltage circuitry or test equipment.

6.4 Submission of contractor inspection equipment designs for approval. Submit two copies of designs as required to: Commander, U.S. Army AMCCOM, ATTN: AMSMC-QAF-I, Picatinny Arsenal, NJ 07806-5000. This address will be specified on the Contract Data Requirements List, DD Form 1423 in the contract. Unless otherwise specified, data item DI-R-1714 will apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6.5 Drawings. Drawings listed in Section 2 of this specification under the heading U.S. Army Armament Research, Development and Engineering Center (ARDEC), may also include drawings prepared by, and identified as, U.S. Army Armament, Research and Development Command (ARRADCOM), Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under cognizance of ARDEC.

6.6 Subject term (Key word) listing.

Fire Control System
Radar Set AN/VPS-2
Radar Test Set AN/TPM-22A

6.7 Changes from previous issue. Asterisks (or vertical lines) are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1285-A702)

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-P-50323C (AR)	22 November 1990

3. DOCUMENT TITLE

POWER SUPPLY: 11834450

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets if needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)
US ARMY ARDEC STANDARDIZATION OFFICE	(1) Commercial (201) 724-6674 (2) AUTOVON 880-6674
c. ADDRESS (Include Zip Code) ATTN: SMCAR-BAC-S PICATINNY ARSENAL, NJ 07806-5000	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.