INCH-POUND

MIL-P-80008D
16 March 1990
SUPERSEDING
MIL-P-80008C
15 April 1981

MILITARY SPECIFICATION

PUNCHING MACHINE, METAL, TURRET TYPE, HAND OPERATED

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification rovers hand operated metal punching machines of the (multi-station) turret type, complete with equipment and accessories specified herein.

1.2 Classification. The punching machine shall be of the following sizes. The size to be furnished shall be as specified (see 6.2). Size is determined by rated capacity in tons, throat depth, and the number of punch stations provided in the turret.

Size 7 -	5	Tons,	12	Inch Throat	Dept h,	1.0 Station.
Size 9 -	8	Tons,	12	Inch Throat	Dept h,	12 Station.
Size 13 -	5	Tons,	18	Inch Throat	Dept h,	18 Station.
Size 14 -	8	Tons ,	18	Inch Throat	Dept h,	18 Station.
Size 15 -	10	Tons ,	18	Inch Throat	Dept h,	18 Station.
Size 16 -	10	Tons,	26	Inch Throat	Dept h,	18 Station.
Size 17 -	12	Tons,	12	Inch Throat	Dept h,	15 Station.
Size 18 -	12	Tons,	26	Inch Throat	Dept h,	18 Station.
Size 19 -	12	Tons,	26	Inch Throat	Dept h,	20 Station.
Size 20 -	15	Tons,	20	Inch Throat	Dept h,	18 Station.
Size 21 -	15	Tons,	26	Inch Throat	Dept h,	20 Station.
Size 22 -	20	Tons,	26	Inch Throat	Dept h,	20 Station.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Defense Industrial Plant Equipment Center, ATTN: DIPEC-SSG, Memphis, TN 38114-5051, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 3445

DISTRIBUTION STATEMENT A. Approval for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (6.2).

SPECIFICATIONS

MILITARY

MIL-M-18058 - Machinery, Metal and Woodworking, packaging of.

STANDARDS

FEDERAL

FED-STD-H28 - Screw Thread Standards for Federal Service.

FED-STD-376 - Preferred Metric Units for General use by the Federal Government.

(Unless otherwise indicated, copies of Federal and military specifications and standards are available from the Naval Publications and Forms Center, (ATTN: NPODS) 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government docments. The following other Government document forms a part of this specification to the extent specified herein. Unless otherwise specified, the issue shall be that in effect on the date of the solicitation.

CODE OF FEDERAL REGULATIONS (CFR)

U. S. DEPARTMENT OF LABOR, 0CCUPATION, SAFETY AND HEALTH ADMINISTRATION (OSHA)

29 CFR 1910 - Occupational Safety and Health Standards.

(Application for copies should be addressed to the Superintendent of documents, U.S. Government Printing Office, Washington, DC 20402-0001.)

(Copies of specifications, standards, and other Government documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 202610-23T04:31Z
Check the source to verify that this is the current version before use.

2.2 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), one complete machine shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

3.2 Design. The machine shall be new (not a prototype) and one of the manufacturer s current production models capable of punching operations in accordance with the requirements herein. The machine shall be a self-contained unit and shall include all components, parts, and features necessary to meet the performance requirements of this specification. The design shall include two multi-punch station type turrets, mounted on the overhang and the base of a C-type frame to form a workpiece opening between the turrets. The upper turret shall be provided with punch holders and the lower turret shall be provided with die holders. The machine shall be arranged to allow hand rotation of the turrets for positioning the selected punch station under a lever actuated ram. All parts subject to wear, breakage, or distortion shall be accessible for adjustment, replacement, and repair.

3.2.1 Measuring and indicating device calibrations. Measuring and indicating devices shall be graduated in INCH-POUND (see 6.5.1), metric (see 6.5.2), or dual (INCH-POUND and metric) units as specified by the procuring activity (see 6.2). Regardless of the measurement system used, all measuring and indicating devices on the machine shall be graduated in the same system.

3.2.1.1 Dials. All dials used to indicate machine axes position or workpiece movement shall be graduated in increments not larger than 0.001 inch. Dial and handwheel circumferences shall be permanently and legibly engraved or etched on a nonglare background with graduations that can be read from the operator’s normal operating position.

3.2.2 Reclaimed materials. The machine may contain reclaimed materials to the maximum extent possible provided such materials will not jeopardize the intended use, performance, or design life of the machine. Reclaimed materials shall have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. None of the above shall be interpreted to mean that the use of used, rebuilt, or remanufactured end products are allowed under this specification.

3.2.3 Controls. All mechanical operating controls shall be located conveniently to the operator’s work station.

3.2.4 Safety and health requirements. All parts, components, mechanisms, and assemblies furnished on the machine, whether or not specifically required herein, shall conform with all requirements of 29 CFR 1910. Additional safety and health requirements shall be as specified in detail (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

covers, guards, or other safety devices normally furnished as standard on the manufacturer's commercial machine supplied to the commercial market shall be provided for the point of operation and all other parts of the machine that present safety hazards. Additional guarding dependent on workpiece size and configuration shall be provided when specified and fully described by the procuring activity (see 6.2).

3.2.5 Mercury restriction. The machine shall not contain mercury or mercury compounds nor be exposed to free mercury during manufacture.

3.2.6 Asbestos restriction. Asbestos and materials containing asbestos shall not be used on or in the punching machine.

3.2.7 Environmental protection. During the manufacture, operation, service, transportation, or storage of the machine, and its components materials hazardous to the ecological system as prohibited by Federal state, or local statutes in effect at the point of installation on the date of the contract shall not be used or emitted.

3.2.8 Lubrication. Means shall be provided to ensure lubrication for all moving parts. All oil holes, grease fittings, and filler caps shall be accessible

3.2.9 Interchangeability. To provide for replacement of worn parts, all parts shall be manufactured to definite dimensions and tolerances that will permit installation of replacement parts without modification of the part or machine. All replacement parts shall be interchangeable with their respective original parts, and fit/functions with mating components.

3.3 Construction. The machine shall be constructed of parts which are new, without defects, and free of repairs. The structure shall withstand all forces encountered during operation of the machine to its maximum rating and capacity without permanent distortion, or failure.

3.3.1 Castings and forgings. All castings and forgings shall be free of defects, scale, and mismatching. No processes such as welding, peening, plugging, or filling with solder or paste shall be used for reclaiming any defective part. Such processes may be used only for enhancing surface finish and appearance.

3.3.2 Fastening devices. All fasteners shall be installed to prevent change of tightness. Fastening devices subject to removal or adjustment shall not be permanently installed.

3.3.3 Surfaces. All surfaces shall be clean and free of harmful or extraneous materials. All edges shall be either rounded or beveled unless sharpness is required to perform a necessary function, Except as otherwise specified herein, the condition and finish of all surfaces shall be in accordance with the manufacturer's commercial practice.

3.3.4 Weldi g, brazing, or soldering. Welding, brazing, or soldering shall be employed only where specified in the original design. None of these operations shall be employed as a repair measure for any defective part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

3.3.5 Painting. Unless otherwise specified (see 6.2), the machine shall be painted in accordance with the manufacturer's commercial practice and color l

3.3.6 Threads. All threaded parts used on the machine and its related attachments and accessories shall conform to FED-STD-H28 and the applicable "Detailed Standards" section referenced therein.

3.3.7 Gears. All gears shall be construct from a material suitable for the intended purpose. All drive gears shall have the hardness, surface, finish, and toughness that will enable the gear train to transmit full rated torque without gear damage, failure, or premature deterioration and wear.

3.4 Components. The punching machine shall consist of not less than a frame, turrets, punch holders, die holders, punches and dies, strippers, and ram.

3.4.1 Frame. The frame structure shall be either cast iron, cast steel, or a fabricated steel weldment of the mass, weight, and rigidity to withstand stresses produced when operating the machine at its maximum capacity without permanent deformation or failure. The frame shall be of "C" style configuration, stress relieved, with the overhang column and base forming a workpiece opening or throat. The depth of the throat shall be as specified for the machine sizes listed in table 1. The frame enclosure shall have covered access openings of the size required to facilitate servicing, maintenance, and adjustments of all components contained therein. The frame shall have provisions for securing the machine to a mounting surface. An eye or attachment point shall be provided at or near its balance point on the frame for lifting the machine. The eye or lift point shall be capable of supporting five times the weight of the machine, and its location shall not cause distortion to the frame when the machine is suspended.

3.4.2 Turrets. The machine shall be provided with upper and lower rotating turrets mounted on bearing surfaces between the overhang and base of the "C" type frame. Unless otherwise specified (see 6.2), each turret shall be provided with at least the number of punch stations specified in 1.2. When specified (see 6.2), the turrets shall be synchronized to rotate as a single unit with the punches of the upper turret constantly aligned with the corresponding dies of the lower turret. The machine shall be provided with indexing pins for aligning and locking each punch of the upper turret into punching position with the corresponding dies of the lower turret. The machine shall be provided with means for preventing the ram from being actuated while the turrets are not locked in the punching position.

3.4.2.1 Punch holders. Each punch station of the upper turret shall be provided with a punch holder. The punch holders shall be constructed of alloy steel, and be arranged to securely hold the punch in position. The punch holders of shaped type punches shall be keyed to the turret stations to assure positive alignment with the punches and dies. The punch holders shall be designed to accommodate standard round and shaped hole punches.

3.4.2.2 Die holders. Each punch station of the lower turret shall be provided with a die holder or other suitable means for holding the dies in position. The die holders shall be construct of hardened steel and

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

TABLE I. Sizes and capacities.

ITEM	Requirements											
	SIZE 7	SIZE 9	SIZE 13	SIZE 14	SIZE 15	SIZE 16	SIZE 17	SIZE 18	SIZE 19	SIZE 20	SIZE 21	SIZE 22
Rated capacity, tons	5	8	5	8	10	10	12	12	12	15	15	20
Throat depth, inches	12	12	18	18	18	26	12	26	26	20	26	26
Number of punch stations	10	12	18	18	18	18	15	18	20	18	20	20
Clearance between dies and strippers, inches	7/32	7/16	7/16	7/16	7/16	7/16	7/16	7/16	7/16	1/4	7/16	7/16
Hole punching capacity in 12 ga. (0.1046) thick mild steel, diameter inches	19/32	31/32	23/32	31/32	1-7/32	1-7/32	1-15/32	1-15/32	1-15/32	1-27/32	1-27/32	2-7/16
Maximum hole punching capacity of machine, inches	1.00	2.00	1.50	2.25	2.00	2.25	2.25	2.25	3.00	2.00	3.00	3.50

NOTE: Machine requirements shall be not less than those stated for the size ordered nor greater than the requirements of the next larger size shown. Machines exceeding these requirements may be considered, but it shall be at the discretion of the procuring activity to determine acceptability of non-complying offers.

Source: https://assist.dla.mil -- Downloaded: 2026-02-23T04:31Z
Check the source to verify that this is the current version before use.

precision ground to securely hold the die in such a manner to prevent the die from turning in the turret. The die holders shall be designed to accommodate standard round and shaped hole dies.

3.4.2.3 Punches and dies. Unless otherwise specified (see 6.2), the machine shall be furnished with one set of punches and dies of sizes conforming to the requirements of table II. The punches and dies shall be constructed of tool steel, hardened and ground for accuracy. The punches and dies shall be marked to identify each punch with the corresponding die. When required, additional punches and dies shall be furnished as specified (see 6.2). When specified (see 6.2), the machine shall be furnished with a manually operated nibbling shear. The nibbling action of the shear shall be accomplished by the use of the hand lever actuated ram. The nibbling shear may be used to perform special shape cutouts in mild steel with thickness not more than 12 gauge.

3.4.2.4 Strippers. The machine shall be provided with strippers or other means for automatically releasing the workpiece from the punch when the punches are withdrawn from the dies.

3.4.3 Ram. The pinching action of the machine shall be accomplished by a hand lever actuated ram of either the roller cam type or the pinion shaft, gear segment type. The ram shall be designed to assure that sufficient energy is developed by a single stroke of the hand leveL to accomplish the performance requirements specified herein. The machine shall be provided with means to prevent the hand lever from being actuated while the turrets are not locked in the punch position. The hand lever shall be not more than 36 inches in length.

3.4.4 Worktable. When specified (see 6.2), each machine shall be provided with a steel plate, stress relieved, production worktable with manual adjustment back and side gauges for aligning the workpiece under the ram. The back gauge shall provide workpiece adjustment in the "Y" axis direction to allow adjustment from the ram center through not less than two-thirds of the throat depth. The side gauge shall provide workpiece adjustment in the "X" axis direction to allow adjustment from the ram center to not less than 12 inches to either side of the machine. When specified (see 6.2), each machine shall be provided with a steel plate, stress relieved, precision worktable with micrometer manual adjustment back and side gauges for aligning the workpiece under the ram. The micrometer dial equipped back gauge shall provide precision adjustment to the workpiece in the "Y" axis direction from the ram center through not less than two-thirds the throat depth. The micrometer dial equipped side gauge shall provide workpiece adjustment in the "X" axis direction to allow adjustment from the ram center to not less than 12 inches to either side of the machine.

3.4.5 stylus type workpiece duplicator. When specified (see 6.2), the machine shall be furnished with a stylus type workpiece duplicating gauge for aligning the workpiece under the ram and punch. The gauge shall be a pantograph styled arrangement with a template table, workpiece holding carriage, and hand controlled stylus for locating the punching points of the templates. The worktable shall have provisions for holding templates not less than 18 x 24 inches in size. The carriage shall be provided with not less than three workpiece clamps.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

TABLE II. Punches and Dies.

Diameter of Punches Required (in inches)

SIZE 7	SIZE 9	SIZE 13	SIZE 14	SIZE 15	SIZE 16	SIZE 17	SIZE 18	SIZE 19	SIZE 20	SIZE 21	SIZE 22
1/8	1/8	1/8	5/32	5/32	5/32	1/8	5/32	5/32	5/32	5/32	5/32
3/16	3/16	3/16	3/16	3/16	3/16	3/16	3/16	3/16	3/16	3/16	3/16
1/4	1/4	1/4	7/32	7/32	7/32	1/4	7/32	7/32	7/32	7/32	7/32
5/16	5/16	5/16	1/4	1/4	1/4	5/16	1/4	1/4	1/4	1/4	1/4
3/8	3/8	3/8	9/32	9/32	9/32	3/8	9/32	9/32	9/32	9/32	5/16
7/16	7/16	7/16	5/16	5/16	5/16	1/2	5/16	5/16	5/16	5/16	3/8
1/2	1/2	1/2	3/8	3/8	3/8	5/8	3/8	3/8	3/8	3/8	7/16
5/8	3/4	9/16	7/16	7/16	7/16	3/4	7/16	7/16	7/16	7/16	1/2
3/4	7/8	5/8	1/2	1/2	1/2	7/8	1/2	1/2	1/2	1/2	5/8
	1	3/4	5/8		5/8	1	5/8	5/8	5/8	5/8	3/4
1	1-1/2	13/16	3/4	5/8	3/4	1-1/8	3/4	3/4	3/4	3/4	7/8
	2	7/8	7/8		7/8	1-1/4	7/8	7/8	7/8	7/8	1
		15/16	1	3/4	1	1-1/2	1	1	1	1	1-1/8
		1	1-1/8	7/8	1-1/8	2	1-1/8	1-1/8	1-1/8	1-1/8	1-1/4
		1-1/8	1-1/4	1	1-1/4	2-1/4	1-1/4	1-1/4	1-1/4	1-1/4	1-1/2
		1-1/4		1-1/8				1-1/2	1-1/2	1-1/2	2
		1-3/8	1-1/2	1-1/4	1-1/2		1-1/2	2	1-3/4	2	2-1/4
		1-1/2		1-1/2				2-1/4	2	2-1/4	2-1/2
			2	1-3/4	2		2	2-1/2		2-1/2	3
			2-1/4	2	2-1/4		2-1/4	3		3	3-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

3.4.6 Mounting stand. When specified (see 6.2), the machine shall be furnished with a machine mounting stand. The mounting Stare shall be of steel construct ion, welded "A" frame design, heavy duty, and arranged to support the machine at a working position of not less than 28 inches above the mounting surface. Provisions shall be made for securing the mounting stand to the mounting surface. When specified (see 6.2), the machine shall be provided with a production floor stand with provision for mounting the machine. The floor stand shall be of metal construction, steel plate cabinet design, heavy duty, and arranged to support the machine at a working position of not less than 28 inches above the mounting surface. The floor stand shall provide means for securing the stand to the mounting surface.

3.4.7 Worklight. When specified (see 6.2), an incandescent worklight shall be provided. The fixture shall have an air vented protective reflector shield, an on-off switch, and shall be adjustable to reflect maximum light on the work area. The lamp shall be no less than 75 watts.

3.5 Size and capacity. Unless otherwise specified (see 6.2), the size and capacity of the machine shall be not less than those specified in table I for the machine size specified.

3.6 Performance. The machine shall be capable of performing sheet metal punching operations in the workpiece thickness specified in table I for the size machine required. The machine shall be capable of performing turret punching operations in workpiece of mild steel having "not less than" 50,000 PSI shear strength, without permanently deforming the workpiece.

3.6.1 Additional performance requirements. Performance features required in addition to, or in lieu of, the requirements herein shall be as specified and fully described (see 6.2).

3.7 Standard equipment. Unless otherwise specified, all standard equipment normally furnished with the manufacturer's commercial machine shall be furnished. When specified (see 6.2), required additional equipment shall be furnished and fully described.

3.8 Optional equipment. Optional equipment shall be furnished as specified and shall be fully described (see 6.2).

3.9 Repair parts. Repair parts shall be furnished as specified (see 6.2).

3.10 Marking on plates and charts. All words on plates and charts shall in the English language. Characters shall be engraved, etched, embossed, stamped in boldface on a contrasting background. All plates shall corrosion resistant.

3.10.1 Marking on plates, charts, and decals. All words on plates, charts, and decals shall be in the English language. Characters shall be engraved, etched, embossed, or stamped in boldface on a contrasting background. When these methods are not practical, the instructions shall be applied directly onto the item by environmentally protected decalcomania transfer, a metal wrap-around tag, stenciling, silk screening, or by any other method suitable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

for the use intended. Marking shall be as permanent as the normal life expectancy of the item to which they are applied and shall be capable of withstanding the environmental test and cleaning procedures specified for the item

3.10.2 Lubrication plate. A corrosion resistant lubrication plate shall be securely attached to each machine. Unless otherwise specified (see 6.2), the plate shall contain the following information:

Points of lubricant application
Servicing interval
Type of lubricant
Viscosity
Military or federal specification for each lubricant, (if applicable)

3.10.3 Nameplate. A corrosion resistant nameplate shall be securely attached to each machine. Unless otherwise specified (see 6.2), the nameplate shall contain the information listed below. If the machine is a special model, the model designation shall include the model of the basic standard machine and a suffix identified in the manufacturer's permanent records. The captions listed may be shortened or abbreviate, provided the entry for each caption is clear as to its identity.

Nomenclature
Manufacturer's name
Manufacturer's model designation
Manufacturer's serial number
Contract Number or Order Number
National Stock Number or Plant Equipment Code
Date of manufacture

3.11 Workmanship. Workmanship of the machine and accessories shall meet all requirements specified herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspections. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspections set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

all requirements of the contract. Sampling inspection, as part of Manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4).

b. Quality conformance inspection (see 4.5).

c. Acceptance test (see 4.6).

4.3 Inspection conditions. Unless otherwise specified (see 6.2), all inspections shall be performed in accordance with the test conditions specified in 4.8.1.

4.4 First article inspection. When a first article inspection is required, it shall be applied to the first article submitted in accordance with 3.1. Unless otherwise specified (see 6.2), first article inspection shall consist of the examination in 4.7 and all tests in 4.8. The machine shall pass the examination and all tests to be accepted.

4.5 Quality conformance inspection. Quality conformance inspection shall be applied to each machine prior to being offered for acceptance under the contract. Unless otherwise specified (see 6.2), the quality conformance inspection shall consist of the examination in 4.7, the tests in 4.8, and the inspection in 4.3. The machine shall pass the examination, all tests, and the inspection to be accepted.

4.6 Acceptance test. An acceptance test shall be performed on each machine to ensure conformance with this specification. Unless otherwise specified (see 6.2), the acceptance test shall be performed only after the machine is installed at its final location. The acceptance test shall consist of the examination in 4.7 and all tests in 4.8. The machine shall pass the examination and all tests to be accepted.

4.7 Examination. Each machine and its accessories shall be examined to determine compliance with all requirements of this specification.

4.8 Tests.

4.8.1 Test conditions. All tests shall be performed in an indoor facility with ambient conditions of 41° to 104° Farenheit (F) and 20 percent to 95 percent relative humidity.

4.8.2 Operational test. Each machine shall be hand operated during which time the turrets, punches and dies, indexing pins, ram and hand lever shall be actuated and observed to determine compliance with the requirements specified herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

4.8.3 Performance tests. The machine's performance shall be tested by hand operating the machine to perform punching operations in the maximum workpiece thickness to determine conformance with the requirements of 3.6 and table I. Two holes per punch station of the turret shall be pierced in a maximum thickness test piece as specified in table 1. The force required to perform piercing operations and the resulting holes in the test pieces shall be observed to determine conformance with 3.6.

4.8.4 Additional performance tests. Performance tests required in addition to or in lieu of the requirements of 4.8.3 shall be as specified and fully described (see 6.2).

4.9 Packaging inspection. Packaging of each item shall be inspected to determine compliance with the requirements of section 5.

5. PACKAGING

5.1 Packaging requirements. The requirements for packaging shall be in accordance with MIL-M-18058.

6. NOTES

6.1 Intended use. The machines covered by this specification are intended to incorporate simple design, easy set up, and rapid adjustment for use in short run sheet metal punching operations. A variety of operations may be performed on the same machine without expensive tooling and movement of job to other machines.

6.2 Acquisition requipments. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Size required (see 1.2).

c. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1).

d. First article, if required (see 3.1).

e. Specify system of units for measuring and indicating devices (see 3.2.1).

f. Additional safety and health requirements, if required (see 3.2.4) .

g. Specify configuration of additional point-of-operation guarding, if required (see 3.2.4.).

h. painting, if different (see 3.3.5).

i. Number of punch stations, if different (see 3.4.2).

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

j. Synchronized turret rotation, if required (see 3.4.2).

k. Punches and dies; if different (see 3.4.2.3).

l. Additional punches and dies, if required (see 3.4.2.3).

m. Nibbling shear, if required (see 3.4.2.3).

n. production worktable, if required (see 3.4.4).

0. Precision worktable, if required (see 3.4.4).

p. Stylus type workpiece duplicator, if required (see 3.4.5).

q. Machine mounting stand, if required (see 3.4.6).

r. Production floor stand, if required (see 3.4.6).

s. Worklight, if required (see 3.4.7).

t. Size and capacity, if different (see 3.5).

u. Additional performance features, if required (see 3.6.1).

v. Standard equipment, if different (see 3.7).

w. Specify and fully describe optional equipment, if required (see 3.8).

x. Specify applicable repair parts, if required (see 3.9).

y. Lubrication plate, if different (see 3.10.2).

z. Nameplate, if different (see 3.10.3).

aa. Inspection conditions, if different (see 4.3).

bb. First article inspection, if different (see 4.4).

cc. Quality conformance inspection, if different (see 4.5).

dd. Acceptance test, if different (see 4.6).

ee. Additional performance tests, if required (see 4.8.4).

6.3 Consideration of data requirements. The following data requirements should be considered when this specification is applied on a contract. The applicable Data Item Descriptions (DIDs) should be reviewed in conjunction with the specific acquisition to ensure that only essential data are requested/ provided and that the DIDS are tailored to reflect the requirements

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

of the specification acquisition. To ensure correct contractual application of the data requirements, a Contract Data Requirements List (DD Form 1423) must be prepared to obtain the data, except where DOD FAR Supplement 27.475-1 exempts the requirement for a DD Form 1423.

Reference Paragraph	DID Number	DID Title	Suggested Tailoring
•	•	•	•
•	•	•	•
•	•	•	•

The above DIDs were those cleared as of the date of this specification. The current issue of DOD 5010.12-L, Acquisition Management Systems and Data Requirements Control List (AMSDL), must be researched to ensure that only current, cleared DIDs are cited on the DD Form 1423.

6.3.1 Technical data. It should be specified in the remarks section of the DD Form 1423 that all technical data furnished should be written in the English language.

6.4 First Article. When first article inspection is required, the contracting officer should provide specific guidance to offerors whether the item(s) should be a first article sample, a first production item, or a standard production item from the contractor's current inventory and the number of items to be tested as specified in 4.4. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examinations, approval of first article test results and disposition of first articles. Invitations for bids should provide that the Government reserves the right to waive the requirment for samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract.

6.5 Definitions.

6.5.1 Inch-pound units. Inch-pound units are a system of measures based on the yard and pound commonly used in the United States of America and defined by the National Institute of Standards and Technology. Inch-pound units having the same names in other countries may differ in magnitude.

6.5.2 Metric units. Metric units are a system of basic measures defined by the International System of Units based on "Le Systeme International d'Unites (SI)," of the International Bureau of Weights and Measures. These unit are described in ASTM E 380 and IEEE 268 (MIL-STD-961).

6.6 Measurement system. In this specification, all measurements, dimensions, sizes, and capacities are given in inch-pound units. These measurements may be converted to metric units through the use of the conversion factors and methods specified in FED-STD-376.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

6.7 Cross-reference of classification. Classification changes from the previous issue of this specification are as follows:

MIL-P-80008C	MIL-P-80008D
Size 6	Size 6 (Deleted)
Size 8	Size 8 (Deleted)
Size 10	Size 10 (Deleted)
Size 11	Size 11 (Deleted)
Size 12	Size 12 (Deleted)
	Size 13 thru 22 (New sizes)

6.8 Changes from previous issues. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.


6.9 Safety health requirements. The 29 CFR 1910 limits only the total hazard level (noise, radiation, electromagnetic emissions, noxious vapors, air contaminants and heat) of the environment in which a machine will operate. It does not limit the hazard level of individual machines in an operating environment. The procuring activity should analyze the existing hazard level in the proposed operating environment and specify additional requirements necessary to integrate this new machine into its future environment.

6.10 Training. Training required by the procuring activity should be provided as specified in the contract.

6.11 Warranty. Warranty requirements shall be as specified by the procuring activity in the contract.

6.12 Inspection location. The contractor should identify in his response to the solicitation the location where inspection and tests are to be performed l

6.13 Part or Identifying Number (PIN). The PIN to be used for the hand operated, turret type, metal, machine acquired to this specification is created as follows:

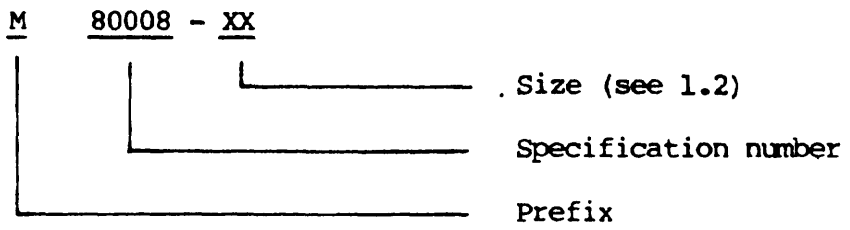

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

6.14 Subject term (key word) listing.

Punching
Turret

Custodians:
Army - AL
Air Force - 99

Review activities:
Air Force - 84

User activities:
Navy - SH, OS
Army - AV

Preparing activity:
DLA-IP

Project (3445-0115)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge (*DO NOT STAPLE*), and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEFENSE LOGISTICS AGENCY
Commander
Defense Industrial Plant Equipment Center
ATTN: DIPEC-SSG
Memphis, TN 38114-5051

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 4966 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEFENSE LOGISTICS AGENCY

Commander
Defense Industrial Plant Equipment Center
ATTN: DIPEC-SSG
Memphis, TN 38114-5051

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T04:31Z
Check the source to verify that this is the current version before use.