MI L-R-50326B (AR)
30 October 1979
SUPERSEDING
MIL-R-50326A
15 April 1971

MILITARY SPECIFICATION

REGULATOR, VOLTAGE: 10548987

This specification is approved for use by the U.S. Army Armament Research and Development Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers a 23-volt regulator, part of converter assembly F10549013 used in PP6324/TPM-22, part of Radar Test Set AN/TPM-22, and in Power Supply Subassembly PP4812/VPS-2, part of Radar Set AN/VPS-2.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

MILITARY

MIL-F-13926	Fire Control Materiel: General Specification Governing the Manufacture and Inspection of
MIL-P-14232	Parts, Equipment and Tools for Army Materiel, packaging and Packing of
MIL-I-45607	Inspection Equipment, Acquisition, Maintenance and Disposition of
MIL-C-46357	Computer, Gun Direction: M18 Manufacturing Processes and Inspection of

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Command, Attn. DRDAR-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance Terms and Definitions
MILI-STD-810	Environmental Test Methods

DRAWINGS

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND (ARRADCOM)

F10548987	23 Volt Regulator

PACKAGING DATA SHEET

10548987	Packaging of 23 Volt Regulator

(Copies of specifications, standards, drawings, and packaging data sheets required by the suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Fabrication. The 23-volt regulator shall be manufactured in accordance with Drawing F10548987 and drawings pertaining thereto.

3.2 General specifications. Where applicable, the 23-volt regulator shall meet the requirements of MIL-F-13926 and MIL-C-46357 as follows:

3.2.1 MIL-F-13926.

a. Order of precedence
b. Dimensions and tolerances
c. Inorganic protective surface finishings
d. Part identification and marking
e. Workmanship
f. Soldering electrical connections

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.2.2 MIL-C-46357.

a. Etched circuit assemblies
b. Wiring
c* Threaded fasteners
d. Marking
e. Finishes

3.3 Environmental service conditions.

3.3.1 Vibration. The 23-volt regulator shall be mounted on the vibration table in normal service position. The 23-volt regulator shall meet the requirements of 3.4 and 3.5 after being subjected to continuous vibration for 2 hours along each of three mutually perpendicular axes within the frequency range of 10 to 40 hertz (Hz) and a half amplitude excursion of 1/64 inch. The rate of change of frequency at each frequency range shall not exceed 1 Hz per second. Vibration tests shall be conducted under ambient room conditions.

3.3.2 Shock. The 23-volt regulator shall not suffer damage and shall meet the requirements of 3.4 and 3.5 after being subjected to 18 impact shocks, consisting of three shocks in opposite directions along each of the three mutually perpendicular axes. The shock impulses shall have an acceleration of 15 gravity units (G) and a pulse duration of 11 + 1 milliseconds (rns). The G value of each impulse shall be w~thin ~ 10 percent when measured with a 0.2 to 250 Hz filter and the maximum G shall occur at approximately 5.5 ms.

3.3.3 Altitude.

3.3.3.1 Operating. The 23-volt regulator shall meet the requirements of 3.4 and 3.5 during and after exposure to barometric pressure encountered at 10,000 feet above sea level (20.6 inches Hg) .

3.3.3.2 Nonoperating. The 23-volt regulator shall meet the requirements of 3.4 and 3.5 after exposure for not less than 1 hour to barometric pressure encountered at 40,000 feet above sea level (5.5 in. Hg).

3.3.4 Temperature.

3.3.4.1 Operating. The 23-volt regulator shall meet the requirements of 3.4 and 3.5 when stabilized thermally at any temperature between -40°F and +155°F. The adjusted output voltages shall be allowed to vary + 5% at temperature extremes.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T20:21Z
Check the source to verify that this is the current version before use.

The nominally adjusted maximum currents shall be allowed to increase 5% of the specified maximum value at temperature extremes.

3.3.4.2 Nonoperating (storage) . The 23-volt regulator **shall** not suffer permanent damage when subjected to not less than **4** hours at each temperature-extreme of -65°F and +160°F and shall meet the requirements of 3.4 and 3.5 when returned to room ambient.

3.3.5 Humidity (nonoperating) . The 23-volt regulator shall meet the requirements of 3.4 and 3.5 after exposure to an atmosphere with ; relative humidity of 94 ~ 4 percent for a period of not less than 10 days.

3.4 Electrical. Each conductor shall be electrically continuous as specified on the schematic diagram of the 23-volt regulator.

3.5 Performance. The 23-volt regulator shall produce results as given in paragraph 3.5.1 and 3.5.2 when supplied with the following:

32 + 6 volts direct current (Vdc), regulated to ~ 0.5 percent[a]~etwee~ Pi-6 (+)~t, Pi-8 (+), Pi-7 (-) and Pi-9 (-).

b. 20 + 10% kilohertz (kHz), 90 ~ 5% Volt (V) peak-to-peak square wave between Pi-l and Pi-2 and between Pi-3 and Pi-4. 0

3.5.1 Output terminals 1371-E72.

3.5.1.1 Output voltage level potentiometer R2. R2 shall control the level of output voltage between E71 (+) and E72 (-). The nominal output voltage shall be 23.00 ~ 0.06 Vdc with a load current of 1.20 amperes direct current (Adc).

3.5.1.2 Current limit potentiometer R17. R17 shall establish the point at which the current limit circuitry becomes effective; With a s.hort applied between E71 and E72, maximum current drain shall be controlled by R17 and associated circuitry and shall not exceed 1.8 Adc. The output shall automatically recover after removal of the short circuit.

&/ The information in parentheses refers to polarity applied to this terminal. This notation shall be applied throughout this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

3.5.1.3 Voltage regulation, line. The output voltage shall not vary more than + 0.23 V with an input voltage variation from 26 to 38 Vdc and a constant load current of 1.2 Adc.

3.5.1.4 Voltage regulation, load. With a constant input voltage of 32 + 6 Vdc, the output voltage shall not vary more than + 0.23 V when the output current is varied from 0 to 1.20 Adc.

3.5.1.5 Output ripple. The ripple shall not exceed 0.23 V peak-to-peak when the input voltage is 32 + 0.32 Vdc and the load current is 1.2 Adc. Exclude high-frequency spikes which occur at approximately 25 usec. intervals.

3.5.2 Output terminals E73 - E74.

3.5.2.1 Output voltage level potentiometer R25. R25 shall control the level of output voltage between E73 (+) and E74 (-). The nominal output voltage shall be 23.00 ~ 0.06 Vdc with a load current of 1.20 Adc.

3.5.2.2 Current limit potentiometer R40. R40 shall establish the point at which the current limit circuitry becomes effective. With a short applied between E73 and E74, maximum current drain shall be controlled by R40 and associated circuitry and shall not exceed 1.8 Adc. The output shall automaticall~ recover after removal of the short circuit.

3.5.2.3 Voltage regulation, line The output voltage shall not vary more than ~ 0..23 V with an input voltage variation from 26 to 38 Vdc and a constant load current of 1.20 Adc.

3.5.2.4 Voltage regulation, load. With a constant input voltage of 32 ~ 6 Vdc, the output voltage shall not vary more than ~ 0.23 V when the output current is varied from 0 to 1.20 Adc .

3.5.2.5 Output ripple. The ripple shall not exceed 0.23 V peak-to-peak when the input voltage is 32 ~ 0.32 Vdc and the load current is 1.2 Adc. Exclude high-frequency spikes which occur at approximately 25 usec. intervals.

3.6 First Article Inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any other facilities suitable for the performance of the inspection requirements specified herein unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 General provisions. The component and subassembly inspection requirements of MIL-F-13926 form a part of the quality assurance provisions of this specification. Definitions of inspection terms shall be as listed in MIL-STD-109.

4.2 First article (initial production) submission. The requirement for first article approval and the responsibility (G&ernment or contractor) for ~~rst article testing shall be as specified in the contract. The sample for first article approval tests shall consist of three 23-volt regulators manufactured in the same manner, using the same materials, equipment, processes and procedures as used in regular production. All parts and materials, including packaging and packing, shall be obtained from the same source of supply as used in regular production.

4.2.1 Government testing. When the Government is responsible for conducting first article approval tests, the contractor? prior to submitting the sample to the Government, shall inspect the sample to ensure that it conforms to all the requirements of the contract and submit a record of this inspection with the sample, including certification of conformance for materials.

4.2.2 Contractor testing. When the contractor is responsible for conducting first article approval tests, the sample shall be inspected by the contractor for all the requirements of the contract. The sample and a record of this inspection, including certification for materials, shall be submitted to the Government for a~roval. The Government reserves the right to witness the contractor's inspection.

4.3 Inspection prOvkiOIM.

4.3.1 Submission of product. Unless otherwise specified by the contracting officer, inspection lot size, lot formation and presentation of lots shall be in accordance with "Submission of Product" provisions of MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026t0-22T20:21Z
Check the source to verify that this is the currentversion before use.

4.3.2 Examination and tests.

4.3.2.1 Components and subassemblies. All components and subassemblies shall be inspected in accordance with the inspection provisions contained in Supplementary Quality Assurance Provision (SQAP) listed in the technical data package (TDP). In the absence of SQAP'S, the applicable quality assurance provisions of MIL-F-13926 shall apply.

4.3.2.2 Final acceptance inspection. Subsequent to first article approval, examination and tests related to Section 3 herein shall be performed on a single defect (individual characteristic) basis in accordance with MIL-STD-105 and the sampling plans specified in 4.3.2.3 and 4.4 herein. Examination' and test for packaging and marking shall be in accordance with MIL-P-14232 and Section 5 herein. The tabulated classification of defects in 4.3.2.3 and 4.4 shall constitute the minimum inspection to be performed by the supplier after first article approval and prior to Government acceptance or rejection by item or lot.

4.3.2.3 Functional tests. The requirements and tests in Table I shall be inspected on a 100 percent basis. All examinations and tests shall be conducted at standard ambient temperatures (60°F to 90°F).

TABLE I. CLASSIFICATION OF DEFECTS
(100 percent inspection)

NO.	CHARACTERISTIC	REQUIREMENT	TEST PROCEDURE
CRITICAL:	NONE		
MAJOR :			
101.	Electrical	3.4	4.6.2
102.	Performance	3.5	4.6.3
MI NOR:	NONE		

4.3.3 Acceptance and rejection. Rejected lots shall be screened for all defective characteristics. Removal or correction of defective units and resubmittance of rejected lots shall be in accordance with "Acceptance and Rejection" as specified in MIL-STD-105.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.4 Special sampling. One 23-volt regulator shall be selected at random by a Government representative as a control sample from each 100-produced. The control sample shall meet the requirements and tests in Table II. Three 23-volt regulators shall be selected at random by a Government representative as a control sample from each 50 Produced or from each month's production, whichever occurs first; The control samples shall meet the requirements and tests in Table III.

TABLE II. SPECIAL SAMPLING

NO.	CONTROL TEST	REQUIREMENT	TEST PROCEDURES
301.	Fabrication	3.1	Applicable drawings - Visual
302.	General specifications	3.2	MIL-F-13926 & MIL-C-46357 - Visual

TABLE III. SPECIAL SAMPLING, ENVIRONMENTAL

NO.	CONTROL TEST	REQUIREMENT	TEST PROCEDURE
303.	Vibration	3.301	4.6.1.1
304.	Shock	3.3.2	4.6.1.2
305.	Altitude	3.3.3	4.6.1.3
306.	Temperature	3.3.4	4.6.1.4
307.	Humidity (nonoperating)	3.3.5	4.6.1.5

4.4.1 Failure of sample. Should any one item of a special sampling fail to meet the specified test requirements, acceptance of the product shall be suspended by the Government until necessary corrections have been made by the contractor and a re-submitted sample has been approved (see 4.3.3).

4.5 Inspection equipment. Except as otherwise provided for by the contract, the contractor shall supply and maintain inspection equipment -in accordance with the applicable requirements of MIL-I-45607.

4.5.1 Government furnished inspection equipment. Where the contract provides for Government furnished test equipment, supply and maintenance of test equipment shall be in accordance with the applicable requirements of MIL-I-45607.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.5.2 Contractor furnished inspection equipment.

4.5.2.1 Government design. Unless otherwise specified in the contract, all inspection equipment specified by drawing number in specifications or SQAP forming a part of the contract shall be supplied by the contractor in accordance with applicable technical data listed in the TDP.

4.5.2.2 Contractor design. The contractor shall design and supply inspection equipment compatible with the "Test Methods and Procedures" specified in 4.6 of this specification and with the component inspection procedures specified in "Examination" and "Test Facilities" requirements of MIL-F-13926. Since tolerance of test equipment is normally considered to be within 10 percent of the product tolerance for which it is intended, this inherent error in the test equipment design must be considered as part of the prescribed product tolerance limit. Thus, concept, construction, materials, dimensions, and tolerances used in-the design of test equipment shall be so selected and controlled as to ensure that the test equipment will reliably indicate acceptability of a product which does not exceed 90 percent of the prescribed tolerance limit and permit positive rejection when nonconforming. Construction shall be such as to facilitate routine calibration of test equipment.

4.5.2.3 Test equipment. In conjunction with 4.5.2.2, the standard test equipment listed in Table IV shall be utilized in performing the applicable tests of 4.6.

TABLE IV. TEST EQUIPMENT LIST

ITEM NUMBER		DESCRIPTION
1.	Signal generator	Capable of producing a 20 ± 10% kHz, 90 ± 5% V peak-to-peak square wave.
2.	Power supply	Dc, 26 to 38 V, 2 A, regulated to 0.5%.
3.	Voltmeter	Dc, 0 to 30 V, 0.01% accuracy, 20,000 ohms/volt or greater.
4.	Oscilloscope	Input sensitivity: 20 mV/cm. Input impedance: 1 megohm. Vertical passband: dc to 1 MHz. Horizontal deflection: 5 us/cm.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

TABLE IV. TEST EQUIPMENT LIST (CONT'D)

ITEM NUMBER	DESCRIPTION
5. Ammeter	Dc, 0 to 2 A, 1% accuracy.
6. Resistive load	Variable 0 to 25 ohms, 100W.

4.6 Test methods and procedures.

4.6.1 Environmental. Environmental tests shall be conducted in accordance with the general requirements and test methods of MIL-STD-810 except as specified herein. Testing equipment used in environmental tests shall be in accordance with "Test Facilities and Apparatus" requirements of MIL-STD-810. After performing requirements of paragraphs 4.6.2 and 4.6.3 at room ambient conditions, nominal settings shall be established with no further adjustments at environmental extremes. Voltage and current specifications shall be allowed to degrade per 3.3.4.1.

4.6.1.1 Vibration. This test shall be performed as specified in Procedure VIII, Method 514 of MIL-STD-810 as modified by paragraph 3.3.1 herein. After vibration, the 23-volt regulator shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.1.


4.6.1.2 Shock. This test shall be performed as specified in Procedure 1, Method 516 of MIL-STD-810 except that shock pulses shall be 11.0 ms and 15 G. After the shock impulses, the 23-volt regulator shall be tested as specified in 4.6.2 and 4.6.3 to determine compliance with 3.3.2.

4.6.1.3 Altitude (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 500 of MIL-STD-810 except that the operating altitude shall be limited to 10,000 feet (20.6 in. Hg). Operation of Step 4 shall be the performance tests specified in 4.6.3 herein. Nonoperating test of 40,000 feet (5.5 in. Hg) shall also be performed.

4.6.1.4 Temperature.

4.6.1.4.1 High (operating and nonoperating). This test shall be performed as specified in Procedure I, Method 501 of MIL-STD-810. The temperature of Step 3 shall be maintained for not less than 4 hours. The temperature of Step 4 shall be +1550 F. In Step 5, the temperature shall be maintained for 4 hours and the 23-volt regulator shall be tested in accordance with 4.6.2 and 4.6.3 during this time.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

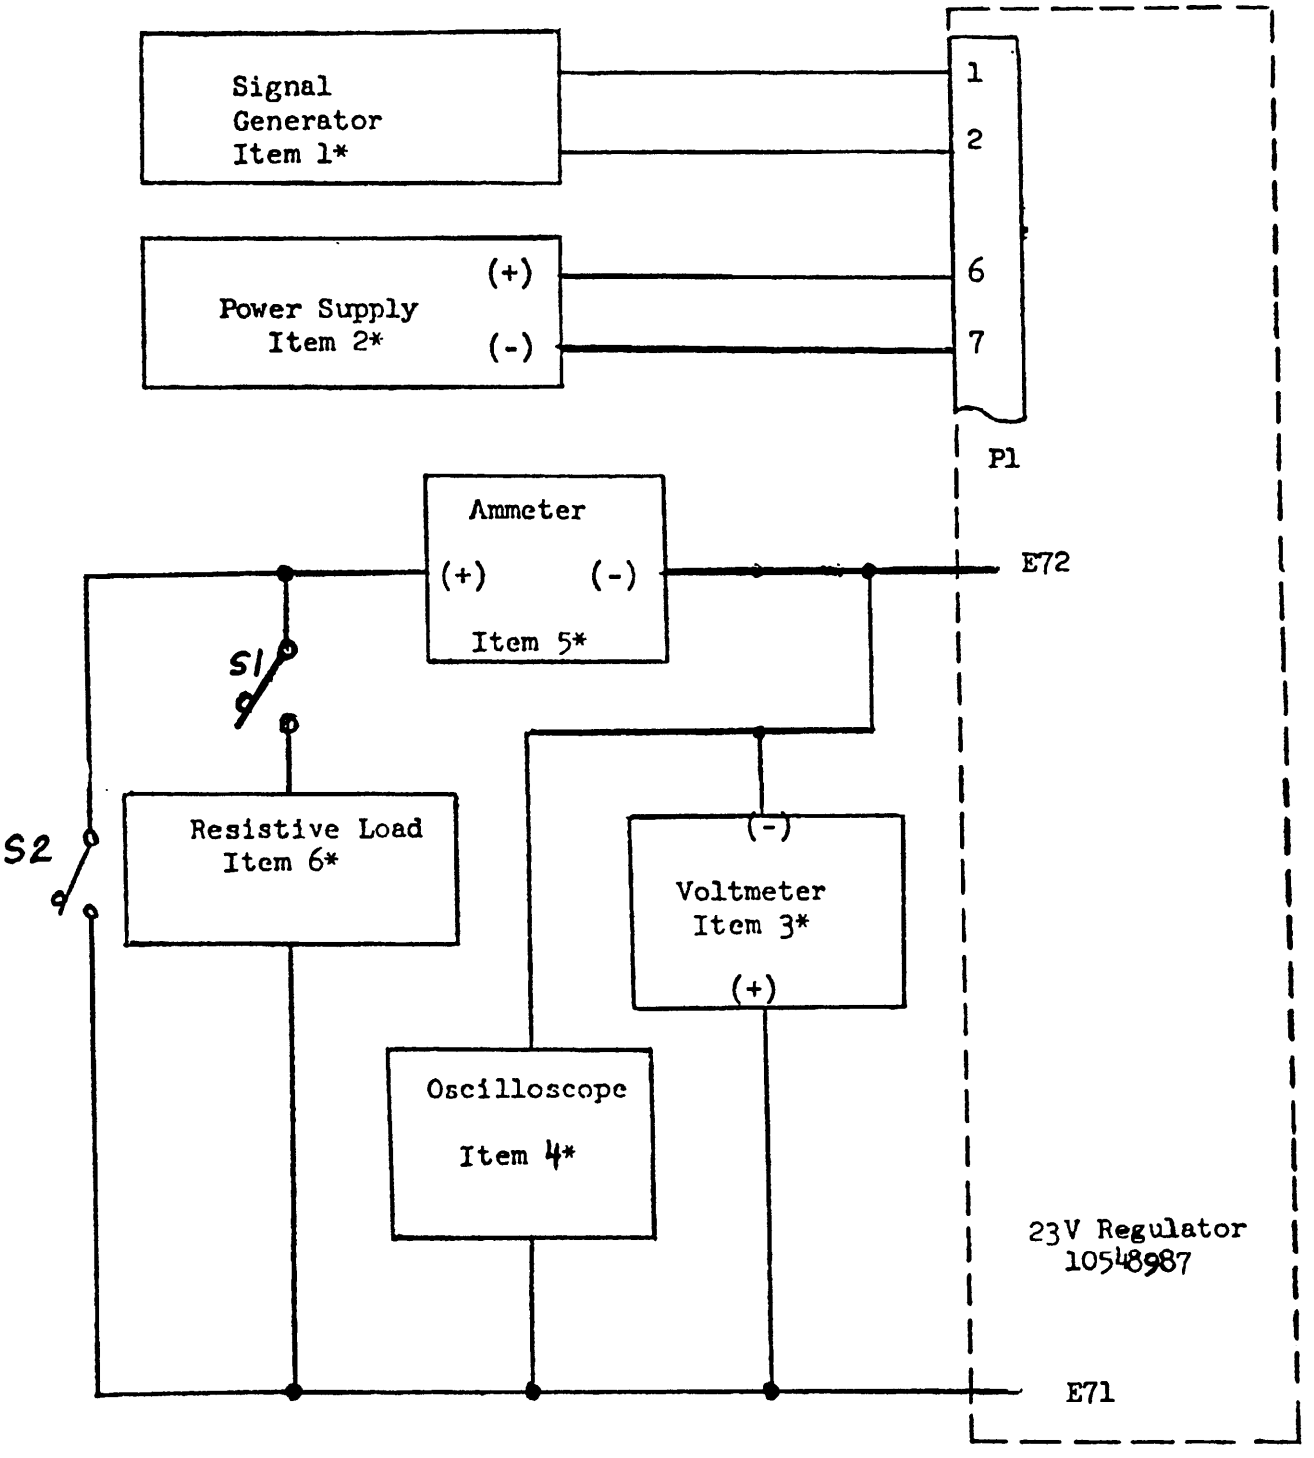

*Refer to 4.5.2.3

FIGURE 1. 23-VOLT REGULATOR TEST SETUP FOR E71 AND E72.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

4.6.1.4.2 "Low (operating and nonoperating). This test shall be performed as specified in Procedure 1, Method 502 of MIL-STD-810. The-temperature of Step 2 shall be -65°F maintained for not less than 4 hours. The temperature of Step 4 shall be -40°F. In Steps 5 and 7, the 23-volt regulator shall be tested in accordance with 4.6.2 and 4.6.3.

4.6.1.5' Humidity (nonoperating) . This test shall be performed in accordance with procedure II, Method 507 of MIL-STD-810 The 23-volt regulator shall be tested in accordance with 4.6.3.

4.6.2 Electrical. Continuity shall be inspected by standard measuring equipment and visual examination for compliance with . 3.4.

4.6.3 Performance. The selected 23-volt regulators shall be tested as follows:

4.6.3.1 Output terminals E71-E72. The following tests shall be performed with test equipment connected to the 23-volt regulator as shown in Figure 1.

4.6.3.1 1 Output voltage level potentiometer R2. Using Item 1, apply a 20 + 10% kHz, 90 ± 5% volt peak-to-peak square wave to Pi-l and P1=2. Using Item 2, apply 32 ± 6 Vdc between , P1-6 (+) and P1-7 (-). With switch S1 open and using Item 3, verify that the voltage between E71 (+) and E72 (-) can be adjusted to 23.00 ± 0.06 Vdc with R2.

4.6.3.1.2 Current limit potentiometer R17. Perform the following steps in sequence:

a. Set up conditions specified in 4.6.3.1.1.

b. Adjust R2 for a voltage indication of 23.00 ± 0.06 V.

c. Adjust R17 fully CCW.

d. Close load switch S1 (See -Figure 1).


e. Close short switch S2 (See Figure 1).

f. Adjust R17 CW until the output current equals 1.8 Adc.

g. Open S2.

h. vary the resistive load to obtain a current indication of 1.2 Adc.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

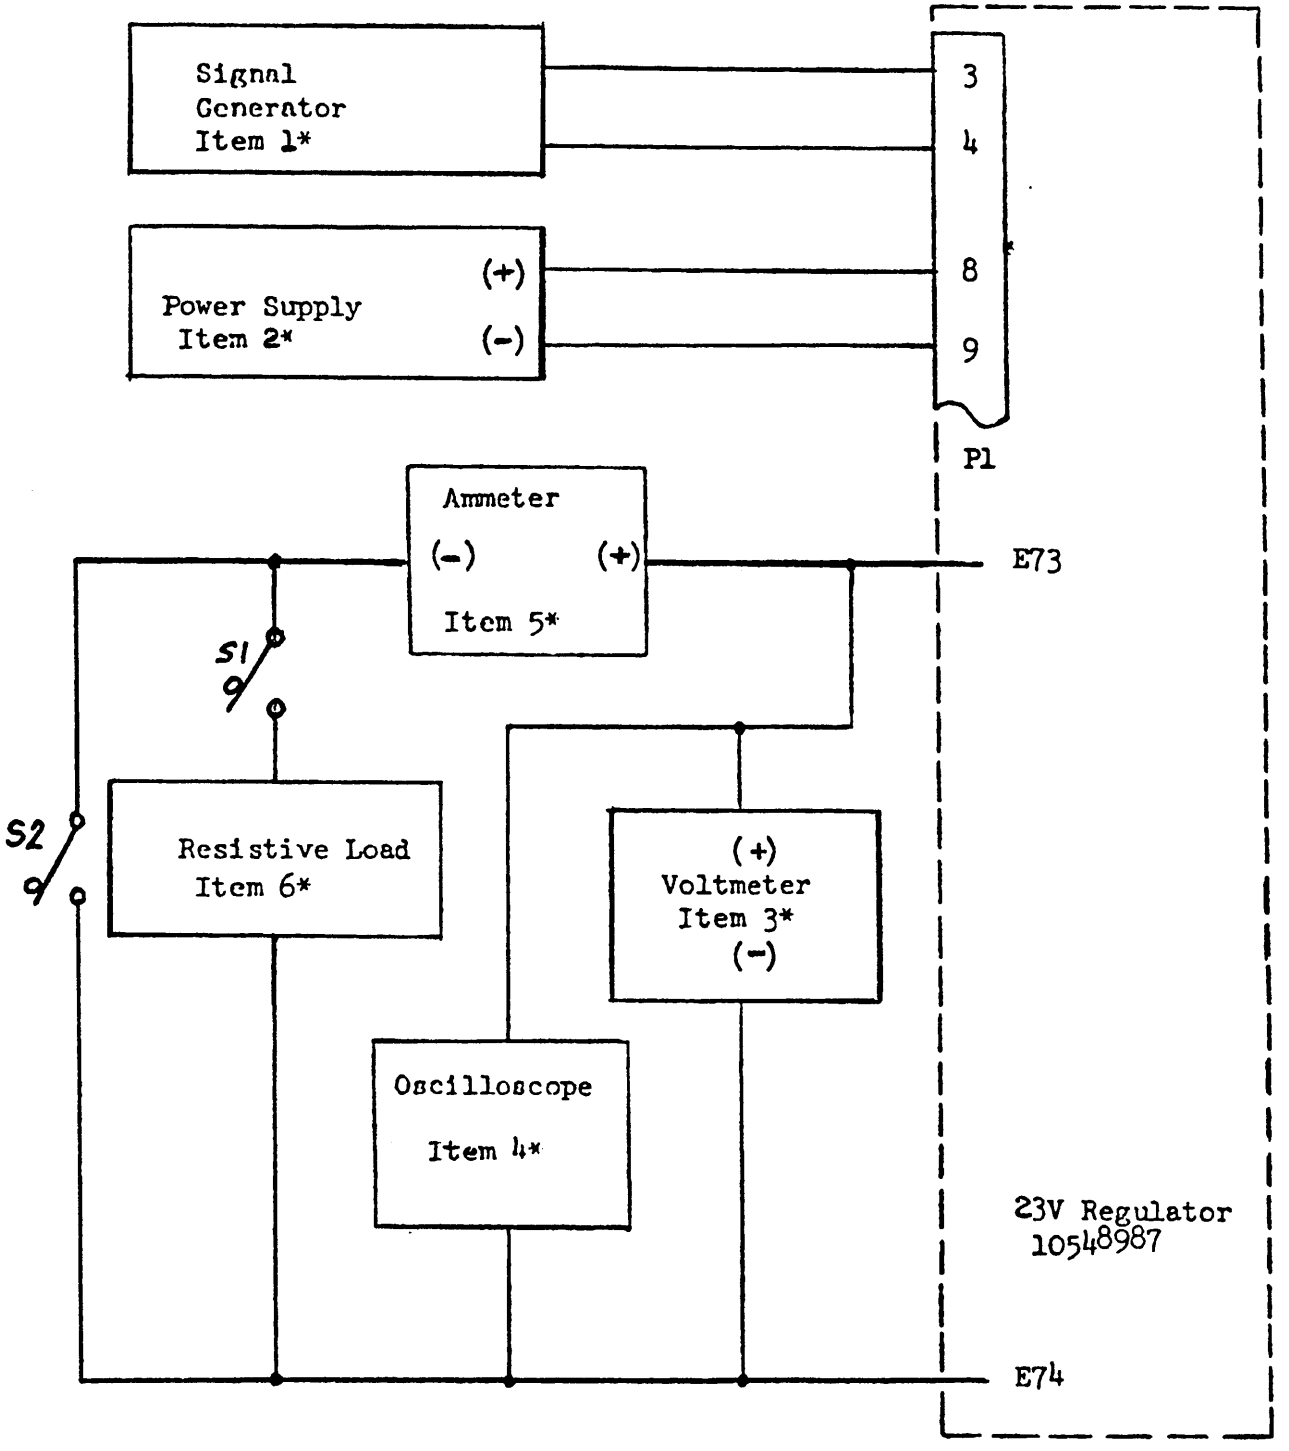

*Refer to 4.5.2.3

FIGURE 2. 23-VOLT REGULATOR TEST SETUP FOR E73 AND E74.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

i. Record the voltmeter indication using Item 3.

j. Close S2 momentarily, then open.

k. Using Item 3, verify that the output automatically returns to within + 0.06 volts of the level in "i" above.

4.6.3.1.3 Voltage regulation, line. With R2 and R17 adjusted as specified in 4.6.3.1.2, adjust resistive load, Item 6, for a current indication of 1.2 Add 'Vary input dc, Item 2, from 26 to 38 Vdc. Using Item 3 verify that the output voltage does not vary more than ± 0.23 Vdc.

4.6.3.1.4 Voltage regulation, load. With R2 and R17 adjusted as specified in 4.6.3.1.2, set input voltage, Item 2, to 32 ± 6 Vdc. Adjust resistive load, Item 6, for maximum resistance and open switch S1. Record voltage indication using Item 3. Close switch S1 and vary the resistive load to obtain 1.2 Adc. Using Item 3, verify that the output voltage varies no more than ± 0.23 V.

4.6.3.1.5 Output ripple. With input voltage, Item 2, set for 32 ± 0.32 Vdc and with R2 and R17 adjusted as specified in 4.6.3.1.2, adjust the resistive load for a current indication of 1.2 Adc. Using Item 4, verify that the ripple does not exceed " 0.23 V peak-to-peak excluding high-frequency spikes which occur at approximately 25 usec. intervals.

4.6.3.2 Output terminals E73-E74. The following tests shall be performed with test equipment connected to the 23-volt regulator as shown in Figure 2.

4.6.3.2.1 Output voltage level potentiometer R25. Using Item 1, apply a 20 + 10% kHz, 90 ± 5% volt peak-to-peak square wave to P1-3 and P1-4. Using Item 2, apply 32 ± 6 Vdc between P1-8 (+) and P1-9 (-). With switch S1 open and using Item 3, verify that the voltage between E73 (+) and E74 (-) can be adjusted to 23.00 ± 0.06 vdc with R25.

4.6.3.2.2 Current limit potentiometer R40. perform the following steps in sequence:

a. Set up conditions specified in 4.6.3.2.1.

b. Adjust R25 for a voltage indication of 23.00 ± 0.06 Vdc.

c. Adjust R40 fully CCW.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

d. Close load switch S1 (See Figure 2).

e. Close short switch S2 (See Figure 2).

f. Adjust R40 CW until the output current equals 1.8 Adc.

g* Open S2.

h. Vary the resistive load to obtain a current indication of 1.2 Adc.

i. Record the voltmeter indication using Item 3.

L Close S2 momentarily, then open.

k. Using Item 3, verify that the output automatically returns to within + 0.06 volts of the level in "i" above.

4.6.3.2.3 Voltage regulation, line. With R25 and R40 adjusted as specified in 4.6.3.2.2, adjust resistive load, Item 6 for a current indication of 1.2 Adc. Vary input dc, Item 2, from 26 to 38 Vdc. Verify, using Item 3, that the output voltage does not vary more than ± 0.23 Vdc.

4.6.3.2.4 Voltage regulation, load. With R25 and R40 adjusted as specified in 4.6.3.2.2, set input voltage, Item 2, to 32 + 6 Vdc. Adjust resistive load, Item 6, for maximum resistance and open switch Sl. Record the voltage indication using Item 3. Close switch S1 and vary the resistive load to obtain 1.2 Adc. Using Item 3, verify that the output voltage does not vary more than ± 0.23 V.

4.6.3.2.5 Output ripple. Set input voltage, Item 2, for 32 + 0.32 Vdc and with R25 and R40 adjusted as specified in 4.6.3.2.2, adjust the resistive load for a current indication of 1.2 Adc. Using Item 4, verify that the ripple does not exceed 0.23 V peak-to-peak excluding high-frequency spikes which occur at approximately 25 usec. intervals.

5. PREPARATION FOR DELIVERY

5.1 Packaging, packing, and marking. Packaging, packing, and marking shall be in accordance with Packaging Data Sheet 10548987. The level of protection shall be as specified in the procurement document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

6. NOTES .

6.1 Intended use. The 23-volt regulator is used in Power Supply Subassembly F10549O13, a part of Power Supply PP4812\VPS-2, part of Radar Set AN/VPS-2. The 23-volt regulator is also used in the PP6324/TPM-22, part of Test Set AN/TPM-22. The 23-volt regulator provides the necessary voltages for functional operation of Radar Set AN/VPS-2 and provides the necessary test voltages in the AN/TPM-22 for functional checkout of Radar Set AN/VPS-2.

6.2 Ordering data. Procurement documents should specify the following:

a. Title, number , and date of this specification.

b. Applicable packaging data sheet number (See 5.1).

c. Selection of applicable level of preservation packaging and packing.

d. Level of protection required.

e. Applicable stock number.

f. Requirement for first article submission.

6.3 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the change.

Custodian:
ARMY-AR

Preparing Activity:
ARMY-AR

Project No. 1285-A481

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-R-50326B REGULATOR, VOLTAGE: 10548987

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US ARMY ARMAMENT RESEARCH & DEVELOPMENT COMM
ATTN: DRDAR-QAF
DOVER,NJ 07801

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T20:21Z
Check the source to verify that this is the current version before use.