OO-H-103b
September 3, 1965

SUPERSEDING
Int. Fed. Spec. OO-H-00103a (Navy-Ships)
June 15, 1964 and
Fed. Spec. OO-H-103
September 17, 1943

FEDERAL SPECIFICATION

HAMMERS, ELECTRIC, PORTABLE AND HAMMER-DRILLS, ELECTRIC, PORTABLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers one type of portable electric hammers and one type of hammer-drills.

1.1.1 *Federal specification coverage.* Federal specifications do not cover all types and styles of electric hammers and hammer-drills which are commercially available, but only those which are generally used by the Federal Government.

1.2 Classification.

1.2.1 *Types, classes, and styles.* Hammers, electric, portable, and hammer-drills, electric, portable, shall be furnished in the following types, classes, and styles, as specified (see 6.2):

Type I—Hammers, electric, portable.
Class 1—A.C.-D.C. (motor driven).
Style A—For 0.495 inch diameter tool shanks.
Style B—For commercial shank tools.
Class 2—A.C. only (electromagnetic).
Style A—For 0.495 inch diameter tool shanks.
Style B—For commercial shank tools.
Type II—Hammer-drills, electric, portable.

2. APPLICABLE SPECIFICATIONS, STANDARDS, AND OTHER PUBLICATIONS

2.1 Specifications and standards. The following specifications and standards, of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein:

Federal Specifications:

J-C-175—Cable Assembly, Power, Electrical, (3-Wire, 3-Prong, Grounding Plug Connector, for 125-Volt Equipment).
W-C-596—Connector, Plug, Electrical; Connector, Receptacle, Electrical.
SS-A-281—Aggregate, (for) Portland-Cement-Concrete.
SS-C-192—Cement, Portland.

Federal Standard:

Fed. Std. No. 123—Marking for Domestic Shipment (Civilian Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

City, Mo., Dallas, Denver, San Francisco, Los Angeles, and Seattle, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specifications:

MIL-H-15424—Hand Tools; Packaging of.
MIL-I-43121—Interference Reduction for Electric Hand Tools.

Military Standards:

MIL-STD-105—Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129—Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 **Other publications.** The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Underwriter's Laboratories, Inc. (UL) Standard:

UL-45—Electric Tools.

(Applications for copies should be addressed to the Underwriter's Laboratories, Inc., 207 East Ohio Street, Chicago 11, Ill.; 161 Sixth Avenue, New York 18, N. Y.; or Sansome Street, San Francisco 11, Calif.)

3. REQUIREMENTS

3.1 **Qualification.** The portable electrical hammers and hammer-drills furnished under this specification shall be a product which has been tested, and passed the qualification tests specified herein, and has been listed on or approved for listing on the applicable qualified products list.

3.2 **Illustrations.** The illustrations shown herein are descriptive, not restrictive, and are not intended to preclude the purchase of hammers or hammer-drills otherwise conforming to this specification.

3.3 **Design.** The hammers and hammer-drills shall be of the manufacturer's latest design. The design shall be such as to provide convenient and safe operation. All parts of the hammer or hammer-drills shall be new, designed and constructed to meet the requirements listed herein. All parts subject to wear, breakage and distortion shall be easily accessible for adjustment and repair.

3.3.1 *Lubrication.* All bearings (except sealed-for-life type), mating gears, and sliding parts shall be provided with means for lubrication. All oil holes, grease fittings, and filler caps shall be easily accessible. Each hammer or hammer-drill shall be furnished completely lubricated.

3.3.2 *Interchangeability.* All parts of the hammer or hammer-drill from the same manufacturer shall be manufactured to such standards as will permit replacement or adjustment without modification of parts.

3.4 **Construction.** The hammer or hammer-drill shall be complete so that when connected to a source of power, it can be used for those operations for which it is designed.

3.4.1 *Castings and forgings.* All castings and forgings shall be free from defects, scale and mismatching.

3.4.2 *Welding, brazing or soldering.* Welding, brazing, or soldering shall be employed only where those operations are included in fabrication of the original design. These operations shall not be used as repair measures by the manufacturer.

3.4.3 *Fastening devices.* All screws, pins, bolts, and similar parts shall be installed with means for preventing loss of tightness.

3.4.4 *Surfaces.* All exposed surfaces shall be smooth and all edges shall be either rounded or beveled. The surfaces shall be plated,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

painted, or otherwise finished according to the manufacturer's standard practice.

3.5 **Components.** The following components, when used, shall conform to the requirements specified for those components.

3.5.1 *Housing.* The working mechanism shall be enclosed in a compact cast aluminum alloy, steel or impact-resistant iron (or combination thereof) housing designed to resist the entrance of dust, dirt and other foreign matter. The housing shall incorporate a handle which shall permit easy operation of the trigger switch when the operator is wearing heavy gloves. The housing shall be designed to prevent the percussion or reciprocating mechanism lubricant from entering the motor compartment.

3.5.2. *Cable assembly.* Unless otherwise specified (see 6.2), each hammer and hammer-drill shall be furnished with a cable assembly not less than 7 feet in length, conforming to type I of J-C-175. The plug connector shall conform to the dimensions for style D of W-C-596.

3.5.3 *Switch.* A readily accessible, self-contained, enclosed, double pole (or contact) switch with an enclosure of impregnated asbestos board, molded plastic or similar material, shall be installed in the handle. The switch shall be of the automatic release type. The switch shall be capable of interrupting the stalled motor current at full rated voltage for 50 consecutive contacts at intervals of 10 seconds, without flashing to the case and sticking or burning of the contacts.


3.5.4 *Motors.* When a rotating type motor is used, it shall be of the universal type, conforming to the requirements of UL 45. All motor components shall be protected against vibration and chaffing of insulation.

3.5.5 *Nozzles.* Nozzles shall be of alloy steel, heat treated to a hardness of not less than 53 on the Rockwell "C" scale or equal. Nozzles for type I, class 1, style A and type I, class 2, style A hammers shall be designed for use of the tool shank shown in figure 1. Nozzles for type I, class 1, style B and type I, class 2, style B hammers shall be the manufacturer's standard for size furnished.

3.5.6 *Pistons and rams.* All pistons, rams and other components having a striking surface in the impact mechanism of the hammer or hammer-drill shall have a hardness on the impacting surfaces of not less than 53 on the Rockwell "C" scale.

3.5.7 *Rectifiers.* When rectifiers are used in the design of the hammer, they shall be integral with the hammer and not in a separate case. Ventilation shall be provided to the rectifier enclosure when needed to keep the rectifiers operating within the temperature rating recommended by the rectifier manufacturer.

3.5.8 *Bearings.* Armature shaft bearings shall be of the ball or roller type. Intermediate and output shaft bearings shall be either ball, roller, or needle except that a sleeve bearing may be used on the connecting rod of the hammer and spindle of the hammer-drills.

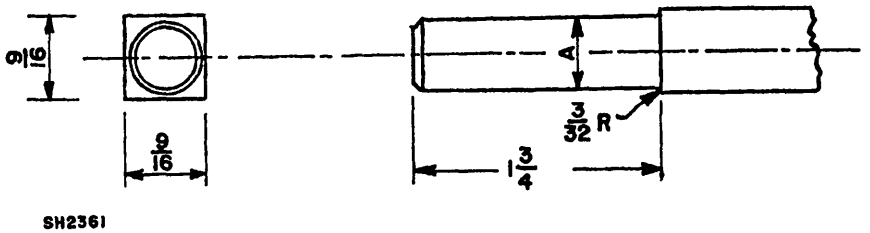

Diameter of shank at A, 0.495 inch; tolerance ±0.002 inch.
Inside diameter of bushing, 0.500 inch; tolerance, ±0.001 inch.

FIGURE 1. Hammer shank

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

3.5.9 *Gears and shafts.* All gears (except worm gears) and all motor shafts having machine cut teeth or spirals shall be of alloy steel and heat treated. All worm gears shall be bronze.

3.6 **Type I hammers.** Type I hammers shall be of the impact type only and shall be supplied in class 1 for a.c. or d.c. operation and class 2 for a.c. operation only. Type I hammers shall have a closed grip handle.

3.6.1 Type I, class 1 hammers shall be powered by a universal (a.c.-d.c.) type of motor. The driving force from the motor shall be transmitted to the driving ram by a drive linkage. Class 1 hammer components shall comply with the requirements specified herein and shall conform to table I. The hammer shall be of single unit design construction and not an attachment impact mechanism for mounting in a drill chuck. Type I, class 1 hammers shall be similar to figure 2.

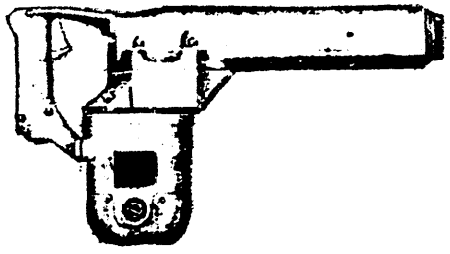


FIGURE 2. Type I, class 1 hammers

3.6.2 *Type I, class 2 hammers.* Type I, class 2 hammers shall be of the electromagnetic type for operation on 115 volt, a.c. current only. The hammer shall be of single unit construction. The hammer shall have two electromagnets which shall energize alternately, causing the free floating piston to reciprocate, striking the tool shank. A stop shall be provided for stopping ram movement away from the chisel. All type I, class 2 hammers drawing in excess of 400 watts shall have a fan for cooling the windings. Type I, class 2 hammers shall conform to table II and be similar to figure 3.

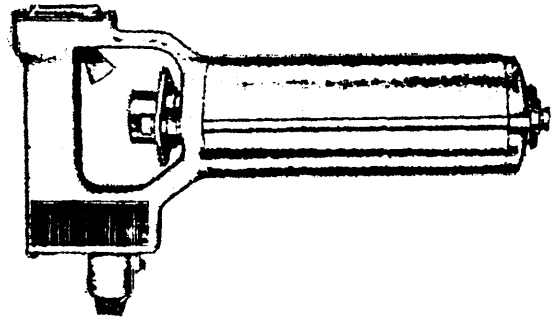


FIGURE 3. Type I, class 2 hammers

3.7 **Type II hammer-drills.** Type II hammer-drills shall consist, essentially, of an electric drill powered by an a.c./d.c. type motor and an impact mechanism for impacting the drill. The impact mechanism shall be integral to the drill and not a separate unit

TABLE I. *Type I, class 1 hammers*

Style and size	Drilling capacity (min.)	Power consumption watts (max.)	Overall length (max.)	Net weight pounds (max.)	Blows per minute (min. & (max.)	Metal chipping rate (min.)	Demolition rate (min.)
	Inches		*Inches*				
Style A Size 1		450	17	17	1500 to 3600	5 grams per min.	
Style B							
Size 1/2	1/2	450	13	6	2200 to 2700	—	10 cubic inches per minute
Size 1	1	600	19-1/2	17	1600 to 2500	—	25 cubic inches per minute
Size 1-1/2	1-1/2	1200	23	21	1900 to 2500	—	50 cubic inches per minute
Size 2	2	1800	24	33	1600 to 2000	—	80 cubic inches per minute

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:58Z
Check the source to verify that this is the current version before use.

TABLE II. *Type I, class 2 hammers*

Style and size	Drilling capacity (min.)	Power consumption watts (max.)	Overall length (max.)	Net weight (max.)	Blows per minute (min.)	Metal chipping rate (min.)	Demolition rate (min.)
	Inches		*Inches*	*Pounds*			
Style A Size 1		200	18	12	3300	5 grams per min.	
Style B Size 1/2	1/2	200	13	12	3300	—	10 cubic inches per minute
Size 1	1	400	16	18	3300	—	20 cubic inches per minute
Size 1-1/2	1-1/2	1000	17	24	3300	—	50 cubic inches per minute
Size 2	2	1200	18	26	3300	—	80 cubic inches per minute

connected to the drill by chucking in a drill chuck. Type II hammer-drills shall conform to table III. Size 1 hammer-drills shall have an end handle with a pistol or closed grip. Size 2 hammer-drills shall have a pistol or closed grip handle with one side handle. Size 3 hammer-drills shall have a breast plate end handle, side handle with switch and an auxiliary side handle. Additional handles shall be optional. Type II, sizes 1 and 2 hammer-drills shall have a disengagable impact mechanism to allow use as a conventional drill and shall have an adjustable rod type depth gage. Each type II, sizes 1 and 2 hammers shall have a three jaw drill chuck of not less than the minimum size specified in table III. Type II hammers shall be similar to figure 4.

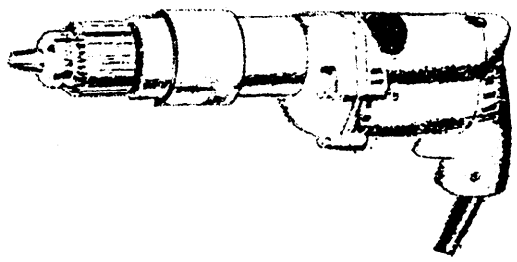


FIGURE 4. Type II, hammer-drills

TABLE III. *Type II, hammer-drills*

Size	Weight (max.)	Length (max.)	Drill cap steel (min.)	No load speed (max.) r.p.m.	Full load speed (min.) r.p.m.	Maximum masonry		Watts continuous duty (min.)	Drill chuck size (min.)	Drilling rate 1-2-4 concrete, core or twist as applicable (min.)
						Twist drill cap. 1-2-4 concrete at least	Core drill cap. 1-2-4 concrete at least			
	Pounds	*Inches*								
1	8	12	1/4	2000	800	1/2	—	250	1/4	5 inches per minute
2	15	22	1/2	1500	450	3/4	—	400	1/2	5 inches per minute
3	23	24	*	900	600	*	4	1000	*	2 inches per minute

* Geared key type chucks not provided.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

3.8 Performance. Each hammer and hammer-drill shall be capable of passing the applicable tests for type, class, style, and size as specified in section 4.

3.9 Voltage. Each hammer and hammer-drill shall operate on 115 volt current ± 6 percent unless otherwise specified (see 6.2).

3.10 Temperature rise. For the type I class 1 hammers and type II hammer-drills, the temperature rise of the motors shall not exceed the limits allowed in UL 45. For the type I, class 2 hammers, the temperature rise of solenoid enclosures shall not exceed 55°C. at the end of 30 continuous operating minutes.

3.11 Radio-interference suppression. Unless otherwise specified (see 6.2), each hammer or hammer-drill shall be designed to insure that generated and propagated radio-interference does not exceed the limits specified in MIL-I-43121.

3.12 Dielectric requirements. Each hammer and hammer-drill shall be insulated or otherwise constructed to withstand a test voltage of 1250 volts between the current carrying components and all outside surfaces.

3.13 Fungus proofing. When required, fungus proofing shall be as specified (see 6.2).

3.14 Carrying case. Each hammer and hammer-drill shall be provided with the manufacturer's standard metal or fiberboard carrying case, of sufficient size to contain the hammer or hammer-drill, maintenance tools and accessories. The case shall have a hinged cover, carrying handle, and closing fastener, The case shall hold the hammer or hammer-drill firmly in a fixed position.

3.14.1 *Marking, case.* The case shall be permanently marked with the following information (to be supplied in the contract or order):

Item name.
Voltage and current.
Size.

3.15 Identification plate. A metal nameplate, permanently and legibly marked to include the following information shall be securely attached to the hammer or hammer-drill:

Manufacturer's name or trademark.
Manufacturer's model number.
Manufacturer's serial number.
Current characteristics (voltage and type).
Frequency.
Full load current.

3.16 Spare parts, accessories, and repair tools. Each hammer or hammer-drill shall be furnished with such chucks, wrenches, dust shields, tool retaining springs, drift-keys, and spare parts as are normally furnished commercially with the hammer or hammer-drill supplied. One can of oil or grease shall be included in addition to that lubricant in the hammer. Each item shall be in the carrying case. Each hammer using rubber yokes shall be supplied with three extra yokes.

3.17 Handbook of instruction. One copy of the manufacturer's standard handbook of instructions and spare parts list shall be furnished, packed in the carrying case.

3.18 Drills, core bits, adapters, and other tooling. When specified (see 6.2) the following optional equipment shall be furnished in the sizes specified:

Star drills.
Chisels and blanks.
Masonry drills.
Core bits, adapters, tubes, and couplings.
Extensions.
Turning handles.

3.19 Workmanship. The hammers and hammer-drills shall be of the best quality, free from imperfections which will adversely affect the general appearance, function, or serviceability.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1 Responsibility for inspection. Unless otherwise specified in the contract or pur-

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:58Z
Check the source to verify that this is the currentversion before use.

chase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Qualification tests[1]. Qualification tests shall be conducted at a laboratory satisfactory to the Bureau of Ships. Qualification tests shall consist of the examination of 4.4 and the tests of 4.5.1 through 4.6.4.

4.2.1 *Samples for qualification tests.* One copy of the manufacturers drawing together with one sample hammer or hammer-drill for each type, class, style and size for which qualification approval is desired shall be submitted for qualification tests.

4.2.2. *Prior radio-interference suppression approval.* Prior to application for qualification tests, complete radio-interference tests shall be performed by the manufacturer or a commercial test laboratory to determine compliance with the requirements of 3.11. Three copies of the test report shall be furnished to the Bureau of Ships for review and approval.

4.3 Sampling for quality conformance inspection.

4.3.1 *Lot.* All portable electric hammers or hammer-drills of the same type, class, style, and size offered for delivery at one time shall be considered a lot for quality conformance inspection.

4.3.2 *Quality conformance inspection.* A random sample of hammers or hammer-drills shall be selected from each lot in accordance with MIL-STD-105 at inspection level II.

4.3.2.1 *Examination.* Each of the sample hammers or hammer-drills selected in accordance with 4.3.2 shall be examined to verify compliance with this specification. Any hammer or hammer-drill containing one or more defects shall not be offered for delivery. If the number of defective hammers or hammer-drills exceeds an acceptable quality level (AQL) of 2.5 percent, this shall be cause for rejection of the entire lot represented by the sample.

4.4 Quality conformance tests. Hammers or hammer-drills selected in accordance with 4.3.2 shall be subjected to the tests of 4.5. Any hammer or hammer-drill containing one or more defects shall not be offered for delivery. If the number of defective hammers or hammer-drills exceeds the AQL of 2.5 percent, this shall be cause for rejection of the entire lot represented by the sample.

4.5 Test procedures.

4.5.1 *Temperature rise and dielectric tests.* The sample hammers or hammer-drills shall be tested to determine compliance with 3.10 and 3.12, as applicable.

4.5.2 *Operational test.* The sample hammers or hammer-drills shall be operated at its rated current for a period of not less than 30 continuous minutes to determine compliance with tables I, II, and III, as applicable, for operating characteristics.

4.6 Qualification tests.

4.6.1 *Type I hammers.*

4.6.1.1 *Chipping test, type I, style A of classes 1 and 2 hammers.* The hammers shall be tested for compliance with the requirements of tables I and II using a chipping hammer testing machine. The test conditions shall be a 3/64-inch deep cut on the edge of a 1/8-inch thick plate under 25 pounds feed pressure. Failure to chip at 5 grams per minute shall be cause for rejection. The test plate shall have the following properties:

[1] Application for qualification tests shall be made in accordance with "Provisions Governing Qualification" (see 6.3 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:58Z
Check the source to verify that this is the currentversion before use.

Physical Properties

Rockwell hardness	B80
Tensile strength	60,000 p.s.i.
Yield point	45,000 p.s.i.
Elongation	31 percent

Chemical Analysis

Element	*Percent*
Carbon	0.22
Manganese	.45
Silicon	.01
Chromium	.02
Nickel	.03
Phosphorous	.009
Sulphur	.02

4.6.1.2 *Demolition test, type I, class 1, style B and class 2, style B.* The hammer, fitted with a bull point or demolition chisel, shall be used to demolish a test slab conforming to 4.7. The bull point may be sharpened or replaced as required. Failure of the hammer to meet the demolition rate requirements of tables I and II as applicable, leaving pieces no larger than 1/2 cubic foot in size, shall constitute failure of this test.

4.6.1.3 *Endurance test, type I hammers.* An endurance test shall be conducted on each type I hammer, with a pendulum weighing 136 pounds swinging freely on ball bearings and designed to mount the hammer at the center of percussion. The machine provides a mass behind the hammer, a constant pressure on the blunt chisel, and a freedom of movement for recoil. The test shall be operated for a total of 80 hours in 8-hour periods during which the hammers shall be cycled on 15 minutes, off 5 minutes.

4.6.2 *Qualification tests, type II hammer-drills.*

4.6.2.1 *Drilling tests, type II hammer-drills.* Type II, sizes 1 and 2 hammer-drills shall be fitted with a masonry type twist drill of the size shown in table III for 1-2-4 concrete and used to drill 3 holes. Drilling time to be of one minute duration each in a test slab conforming to 4.7. Failure to maintain the drill rate specified shall be cause for rejection. Type II, size 3 hammer-drills shall be tested using a carbide tipped core drill 1-1/2 inches in diameter. Failure to maintain a drilling rate of 2 inches per minute shall be cause for rejection.

4.6.2.2 *Service test, type II hammer-drills.* After successful completion of the drilling test, type II hammer-drills shall be subjected to a 150-hour service test by using in actual service, and the total time used recorded, until a total of 150 hours of service time is completed, or a simulated service test of drilling in mild steel 1/2 inch thick at maximum drill capacity for 40 holes, and then hammer-drilling through 4-inch cement blocks for 20 holes with a carbide tipped masonry rotary drill of maximum rated size. These simulated tests shall be run alternately (10 cycles) for a total of 400 holes in metal and 200 holes in cement.

4.6.3 *Qualification test monitoring.* The chipping test of 4.6.1.1, endurance test of 4.6.1.2, and drilling test of 4.6.2.1, shall be monitored by appropriate meters for determination of power consumption. Spot checks shall be made using a stroboscopic light or other similar means for determination of blows per minute or revolutions per minute as applicable.

4.7 **Concrete test block.** The demolition tests of 4.6.1.2 and drilling tests of 4.6.2.1 shall be conducted on a test slab 4 feet long, 2 feet wide, and 1 foot thick. The test slab to consist of one part cement conforming to SS-C-192; two parts fine aggregate conforming to SS-A-281; and four parts coarse aggregate conforming to SS-A-281, size number 57. The test block shall be allowed to set for 28 days prior to use.

4.8 **Inspection of preservation, packaging, packing, and marking for shipment and storage.** Preservation, packaging, packing, and marking for shipment and storage shall be examined to determine conformance with the documents referenced in section 5 or as specified in the contract or order.

Source: https://assist.dla.mil - Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, and packing. Unless otherwise specified (see 6.2), preservation, packaging, and packing shall be in accordance with the requirements for "grinder, electric, portable, general use" in accordance with MIL-H-15424.

5.2 Marking.

5.2.1 *Military requirements.* Marking for shipment shall be in accordance with MIL-STD-129.

5.2.2 *Civil agencies requirements.* Marking for shipment shall be in accordance with the standard marking of Fed. Std. No. 123.

6. NOTES

6.1 Intended use. Hammers, electric, covered by this specification are suitable for scaling, chipping, calking, drilling, channeling, gouging, breaking, and vibrating operations on metal, stone, clay, wood, and cemented surfaces. Hammer-drills are for using spiral flute and core-type masonry drills to percussion-drill holes in the various forms of masonry construction, including reinforced concrete.

6.2 Ordering data. Purchasers should exercise any desired options offered herein and procurement documents should specify the following:

(*a*) Title, number, and date of this specification.
(*b*) Type, class, style, and size required (see 1.2.1 and tables I, II, and III).
(*c*) Whether the hammer or hammer-drill shall be for operation on a current different from that specified (see 3.9).
(*d*) Cable assembly requirements, if different (see 3.5.2).
(*e*) If radio-interference suppression is not required (see 3.11).
(*f*) Whether fungus proofing is required and give requirements (see 3.13).
(*g*) Optional equipment when required (see 3.18).
(*h*) Preservation, packaging, and packing requirements, if different (see 5.1).
(*i*) Marking requirements (see 5.2.1 and 5.2.2).

6.3 With respect to products requiring qualification, awards will be made only for such products as have, prior to the time set for opening of bids, been tested and approved for inclusion in Qualified Products List QPL OO-H-103, whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification, in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the qualified products lists is the Chief of the Bureau of Ships, Department of the Navy, Washington 25, D. C., and information pertaining to qualification of products may be obtained from that activity. Application for qualification tests shall be made in accordance with "Provisions Governing Qualification" (see 6.4).

6.4 Copies of "Provisions Governing Qualification" may be obtained upon application to Commanding Officer, Naval Supply Depot, 5801 Tabor Avenue, Philadelphia 20, Pennsylvania.

6.5 Transportation description. Transportation descriptions and minimum weights applicable to this commodity are:

Rail:

Tools, electric, not otherwise indexed by name.
Carload minimum weight 30,000 pounds.

Motor:

Tools, electric, not otherwise indexed.
Truckload minimum weight 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.

MILITARY CUSTODIANS:

Army—GL
Navy—SH
Air Force—69

Review activities:

Army—GL, EL
Navy—SH
Air Force—69

User Activities:

Army—MO
Navy—MC

Preparing activity:

Navy—SH

Copies of this specification may be purchased for 10 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:58Z
Check the source to verify that this is the current version before use.