OO-R-421B
June 9, 1976
SUPERSEDING
Fed. Spec. OO-R-421A
February 21, 1958

FEDERAL SPECIFICATION

RIVETER, PNEUMATIC, JAM AND HAMMER; AND HOLDER-ON, PORTABLE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers portable pneumatic tools for use in riveting and rivet holding.

1.1.1 Federal specification coverage. Federal specifications do not include all types, classes, styles, and sizes of the commodity indicated by the title of this specification, but cover only those most generally used by the Federal Government.

1.2 Classification.

1.2.1 Types, classes, and sizes. Portable pneumatic tools shall be of the following types, classes, and sizes, as specified (see 6.2):

Type I - Structural (hot rivets) riveting hammer.
- Size 5 - 3/8 to 3/4 inch diameter rivet
- Size 6 - 1/2 to 7/8 inch diameter rivet
- Size 8 - 3/4 to 1-1/8 inch diameter rivet
- Size 9 - 1 to 1-1/4 inch diameter rivet

Type II - Aircraft riveting hammer.
- Class 1 - Fast hitting.
  - Size 1 - 5/32 inch diameter rivet
- Class 2 - Slow hitting.
  - Size 2 - 1/8 inch diameter rivet
  - Size 3 - 3/16 inch diameter rivet
  - Size 4 - 1/4 inch diameter rivet
  - Size 5 - 3/8 inch diameter rivet

Type III - Jam riveter.
- Size 1 - 3/8 to 3/4 inch diameter rivet
- Size 2 - 1/2 to 1 inch diameter rivet

Type IV - Holder-on.
- Size 1 - Long
- Size 2 - Short

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of the specification to the extent specified herein.

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from the Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles and Seattle, WA.

(Federal Governmant activities may obtain copies of Federal Specifications, Standards and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Bureau of Standards (NBS) Handbook:

H28 - Screw Thread Standards for Federal Services.

(Application for copies should be addressed to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402.)

American National Standards Institute (ANSI) Standard:

S5.1 - Test Code for the Measurement of Sound from Pneumatic Equipment.

(Application for copies should be addressed to the American National Standards Institute, Inc., 1430 Broadway, New York, New York 10018.)

3. REQUIREMENTS

3.1 Qualification. Portable pneumatic riveting tools, furnished under this specification, types I and II only, shall be products which are qualified for listing on the applicable qualified products list at the time set for opening of bids (see 4.3 and 6.3).

3.2 Illustrations. The illustrations herein are descriptive, and not restrictive, and are not intended to preclude the purchase of riveters otherwise conforming to this specification.

3.3 Construction. Tools shall be of high-grade material suitable for the purpose intended (see 1.1), and shall be of rugged construction so as to withstand, without injury, treatment likely to be encountered under general service conditions found in shipyard and structural work. Tools shall be reliable and effective when operated with compressed air lines at pressures between 80 and 100 pounds per square inch gage (lb/in^2g). Tools shall be self-contained, readily accessible for adjustment or replacement of parts, and of convenient size and shape for ease of operation under service conditions.

3.3.1 Parts. Parts which require lubrication shall be properly enclosed so as to prevent entrance of foreign particles and leakage of lubricant. Working parts exposed to wear shall be of sufficient hardness to withstand the service required. Parts shall be properly finished by machining or grinding to dimensions within limits established by good commercial practice. Similar parts shall be interchangeable and of good fit when assembled with relative parts of the same size, type, and make of tool.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:59Z
Check the source to verify that this is the current version before use.

3.3.2 Materials. The materials used in the construction of all components shall be capable of completing the examinations and tests specified herein. All components shall be new and unused. Repaired or reconditioned components shall not be acceptable.

3.3.3 Driver retainer. Except for type IV, a driver retainer of sufficient size and durability to comply with the test requirement (see 4.6.3), shall be attached to the barrel of the tool.

3.4 Air-inlet connection. The air-inlet connection shall consist of a well-secured brass or ferrous fitting having internal National Pipe Thread (NPT) threads conforming to NBS H28.

3.5 Strainer. Tools shall be fitted with an air strainer or screen which shall be effective in retaining solid particles in the compressed air supply. The strainer shall be of such design that it can be readily removed for cleaning.

3.6 Identification markings. Each tool shall be marked in a permanent and legible manner showing at least the following: The manufacturers' name or registered trade mark, model number, size, and maximum no load speed.

3.7 Type I, structural (hot rivets) riveting hammers. Type I hammers shall be capable of driving hot rivets of the range of diameters specified in table I when operated at an air pressure of 80 to 100 lb/in^{2}g, be similar to figure 1 and conform to the applicable data shown in table I.

Table I - Type I, riveting hammers, dimensions.

Size number of hammer	Range of diameters of rivets Inches	Weight[1/] (max) Pounds	Length overall (approx) Inches	Diameter of piston (approx) Inches	Stroke of piston (approx) Inches	Air consumption (max) scfm
5	3/8 to 3/4	20	18	1-1/16	5	40
6	1/2 to 7/8	21	19	1-1/16	6	40
8	3/4 to 1-1/8	23	21	1-1/16	8	45
9	1 to 1-1/4	25	22	1-1/16	9	45

1/ The maximum weight allowed is exclusive of rivet set.

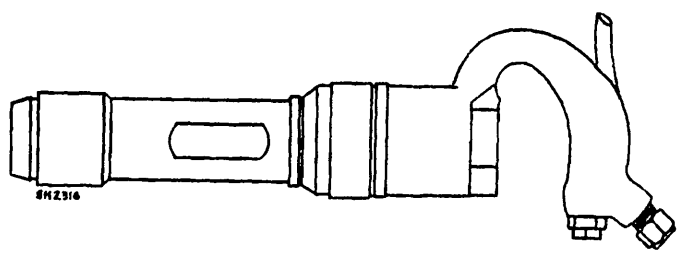


Figure 1 - Type I, structural (hot rivets) riveting hammer.

3.7.1 Handle. The handle shall be of the open or closed style, as specified (see 6.2). The handle and cylinder barrel shall be locked together, in such a manner that they will not become loose in service.

3.7.2 Throttle. A nonleaking throttle shall be provided for controlling and regulating air supply to tool. Throttle shall automatically and positively shut off air supply to tool when released. Throttle valving shall be provided with either "O" rings or gaskets that shall prevent air leakage in the open or closed position. Throttle shall be of the conventional outside lever type, similar to figure 1.

3.7.3 Barrel and piston. The barrel and piston shall be of hardened steel suitable for the purpose intended. Barrels shall be fully heat-treated to a Rockwell hardness of not less than 48 nor more than 55 on the C scale.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

3.7.4 Nozzle. Nozzle shall have an inside diameter 1.220 ± 0.001 inch and be suitable for use with rivet sets having dimensions as shown in figure 2.

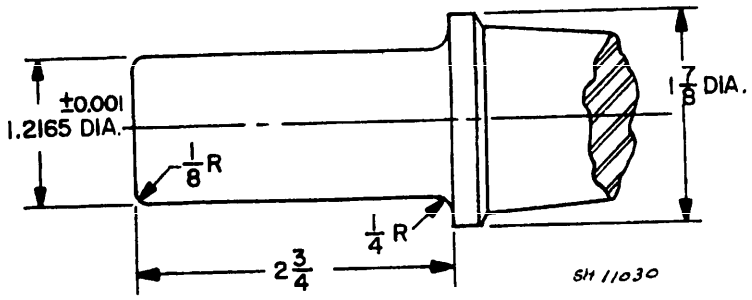


Figure 2 - Rivet set shank for types I, III, and IV.

3.7.5 Air inlet. Size of air inlet connection shall be 3/8 inch NPT.

3.8 Type II, aircraft riveting hammers. Type II, classes 1 and 2 aircraft riveting hammers shall be capable of driving cold rivets of the range of diameters specified in table II when operated at an air pressure of 80 to 100 lb/in^{2}g be similar to figure 3, and conform to the applicable data shown in table II.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:59Z
Check the source to verify that this is the currentversion before use.

Table II - Type II, aircraft riveting hammers.

Size no. of hammer	Capacity[1] rivet size, inch	Weight[2] with inline handle, pounds (max)	Weight[2] with steel pistol grip handle, pounds (max)	Length with inline handle, inches (max)	Length with pistol grip handle, inches (max)	Piston		Nozzle[3] inside diameter inch	Air consumption scfm (max)	Impact frequency blows/min (min-max)	Shank size
						Stroke, inches (approx)	Diameter inch (approx)				
					Class 1 - Fast hitting						
1	5/32	3	4	6-1/2	9	1-2	5/8	0.405	16	4200-5500	Fig. 4A
					Class 2 - Slow hitting						
2	1/8	3-1/4	5	7-1/2	10-1/4	2-3	1/2 or 9/16	.405	14	2300-2900	Fig. 4A
3	3/16	3-3/4	5-1/2	8-1/2	11-1/2	3-4	1/2 or 9/16	.405	15	1500-2100	Fig. 4A
4	1/4	4	6	9-1/2	12	4 to 5-1/2	1/2 or 9/16	.405	16	1300-1800	Fig. 4A
5	3/8	6	8	12	15	5-1/2 to 7	3/4	.501	22	800-1500	Fig. 4B

[1] For aluminum, dural, and soft iron cold rivets.

[2] The maximum weight allowed is exclusive of rivet set.

[3] Tolerance ± 0.001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

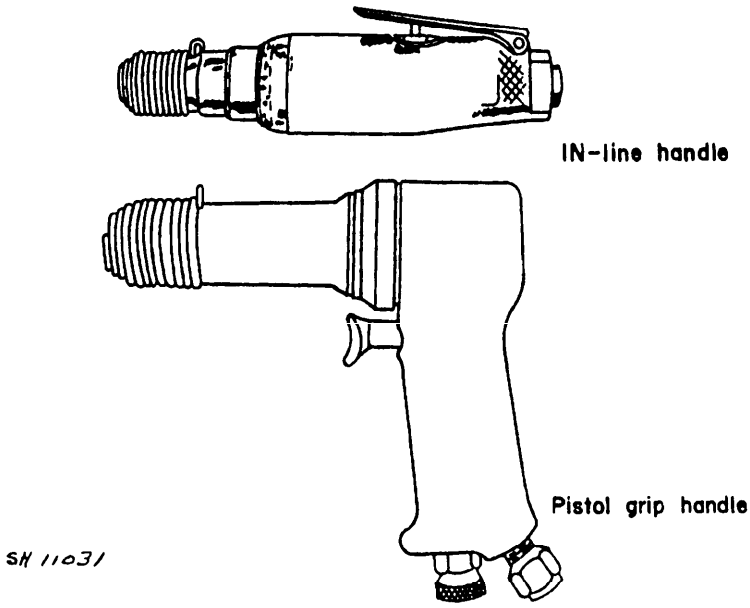


Figure 3. Type II, aircraft riveting hammers.

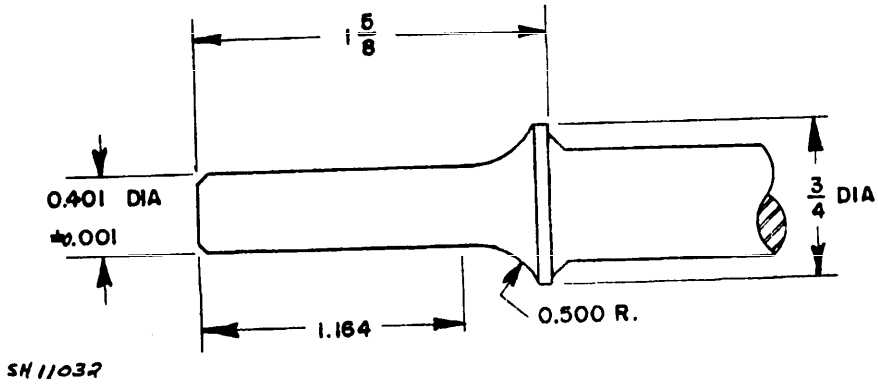


Figure 4a. Small rivet set shank - for type II hammers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

OO-R-421B

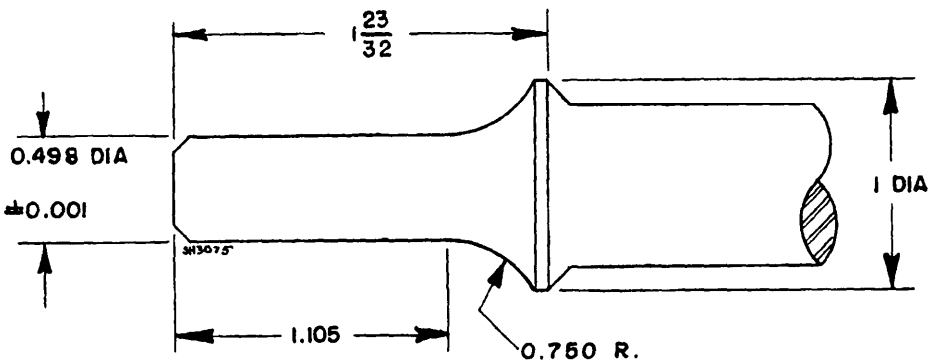


Figure 4b - Large rivet set shank - for type II hammers.

NOTE: All dimensions are in inches.

3.8.1 Handle. The handle shall be of the inline style or of the pistol grip style, as specified (see 6.2), and as shown in figure 3. The handle and cylinder barrel shall be locked together in such a manner that they will not come loose in service.

3.8.2 Throttle. Throttle shall conform to the requirements of 3.7.2, with the exception that the pistol grip type riveting hammer shall have an inside trigger type throttle.

3.8.3 Barrel and piston. The barrel and piston shall be fully heat-treated to a Rockwell hardness of not less than 48 nor more than 55 on the C scale.

3.8.4 Nozzle. The inside diameter of the nozzle shall be of the applicable size indicated in table II and shall be suitable for use with the applicable rivet set shown in figures 4a or 4b.

3.8.5 Air inlet. The air inlet connection for aircraft riveting hammers shall be internal 1/4-inch NPT size.

3.9 Type III, jam riveters. Type III jam riveters shall be suitable for use in riveting between channels or in confined or narrow spaces. Jam riveters shall conform to the applicable data shown in table III and shall be capable of driving rivets of the respective range of diameters specified when operated at an air pressure of 80 to 100 lb/in^2g and shall be similar to figure 5.

Table III - Type III, jam riveters.

Size number of riveter	Range of diameters of rivets	Weight (max)	Length overall (closed) (approx)	Travel of cylinder from shell	Diameter of piston	Stroke of piston	Air consumption (max)
	Inch	Pounds	Inches	Inches	Inches	Inches	scfm
1	3/8 to 3/4	37	14	2 to 5-1/2	1-7/32 to 1-3/4	2 to 5	40
2	1/2 to 1	70	21	4 to 6	1-1/8 to 1-3/4	6 to 8	45

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

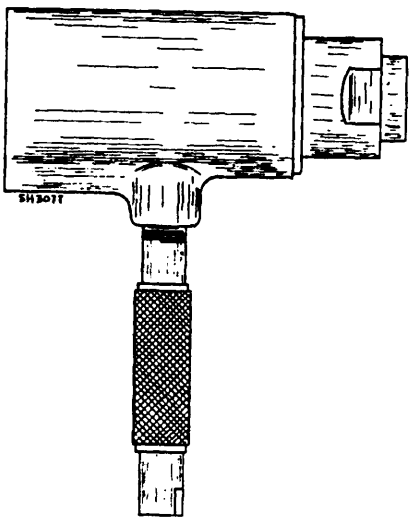


Figure 5 - Type III, jam riveter.

3.9.1 Construction. Jam riveters shall be of the valve type and shall consist of an outer shell which houses a movable steel cylinder. The movable steel cylinder shall act as a plunger as well as a cylinder, through which shall pass a tool-steel riveting piston. The movable cylinder shall also hold the rivet set. The operation shall be such that when air is admitted into the shell, the cylinder will extend from the shell until firm contact is made on the rivet head, at which time the riveting piston shall come automatically into operation. The plunger cylinder shall have an inside diameter suitable for use with rivet set shank as shown in figure 2.

3.9.2 Throttle. Throttle shall conform to the requirements of 3.7.2 with the exception that throttle shall be of the sleeve type, similar to figure 5.


3.9.3 Air inlet. The air connection shall be 3/8 inch NPT.

3.10 Type IV, holders-on. Type IV holders-on shall be suitable for use in backing rivets, conform to the data in table IV and be similar to figure 6.

Table IV - Type IV, holders-on.

Size of holders-on	Weight (maximum)	Length overall (closed) (approx)	Travel of Plunger from cylinder	Diameter of plunger
	Pounds	Inches	Inches	Inches
1 - long	26	12	4 to 6	3 to 3-1/8
2 - short	26	8	1-3/4 to 4	3 to 3-1/2

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:59Z
Check the source to verify that this is the current version before use.

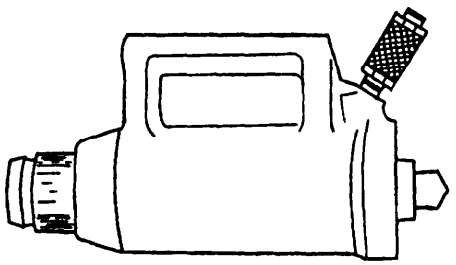

SH 11033

Figure 6 - Type IV, holder-on.

3.10.1 Construction. Holders-on shall be fitted with a suitable grip handle in addition to the throttle handle, and the closed end of each cylinder shall be fitted with a hardened, tool-steel, threaded center point. Holders-on shall be furnished with center or offset pistons, as specified (see 6.2). Holders-on shall consist primarily of a cylinder fitted with a hardened-steel plunger. The operation shall be such that when air is admitted into the cylinder the plunger will extend from the cylinder until the rivet set carried in the plunger sets firmly on the head of the rivet to be driven and remains so set until the air pressure is released. Provisions shall be made for:

(a) Retaining plunger in cylinder.
(b) Preventing leakage of air by plunger.
(c) Retaining of rivet set in plunger.

3.10.2 Characteristics. Holders-on shall be furnished in two sizes, long and short, as specified (see 6.2). Either size shall be suitable for backing up all sizes of rivets up to 1-1/4 inches in diameter when operated at an air pressure of 80 to 100 lb/in^2g. The plunger for each size of holders-on shall have an inside diameter to accommodate the rivet-set shank shown in figure 2.

3.10.3 Air inlet. The air inlet connection shall be 3/8-inch NPT.

3.10.4 Throttle. Throttle for holders-on shall conform to the requirements of 3.9.2, with the exception that when throttle is released, provisions shall be made for automatic bleeding of air from cylinder.

3.11 Sound pressure levels. The sound pressure levels measured at an unobstructed distance of one meter shall not exceed 95 decibels (dB) for types I, III, IV, and 90 dBA for type II on the A weighted scale in any prescribed location (see 4.7).

3.12 Carrying case. Each riveter, jam hammer, and holder-on shall be provided with the manufacturer's standard metal or durable plastic carrying case, of sufficient size to contain the riveter, jam hammer, holder-on, maintenance tools, and accessories. The case shall have a hinged cover, carrying handle, and closing fastener. The case shall hold the riveter, jam hammer, or holder-on firmly in a fixed position.

3.13 Technical manual. One copy of the manufacturer's standard technical manual of instructions and spare parts list shall be furnished, packed in the carrying case.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:59Z
Check the source to verify that this is the current version before use.

3.14 Workmanship. Workmanship of the riveters shall be such that the tools shall be free of any defects which would adversely affect the operation, efficiency, serviceability, or life expectancy of the tools. All components shall be new and machined to tolerances which insure ease of interchangeability.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

(a) Qualification inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

4.3 Qualification tests. Qualification tests for types I and II only shall be conducted at a laboratory satisfactory to the Naval Ship Engineering Center. Qualification tests shall consist of the examinations of 4.5 and the tests of 4.6, 4.7, and 4.8. Application for Qualification tests shall be made in accordance with "Provisions Governing Qualification SD-6" (see 6.3 and 6.3.1).

4.3.1 Qualification sample. The manufacturer shall submit for testing, one tool complete with technical manual, parts lists, and one extra rivet set for each type, class, and size riveter for which qualification tests have been authorized.

4.4 Quality conformance inspection. The quality conformance inspections shall consis of all the examinations specified in 4.5 and the test specified in 4.6.2.

4.4.1 Inspection lot. All riveters or holders-on of the same type, class, and size, presented at one time, shall be considered a lot for the purpose of acceptance inspection and test.

4.4.2 Sampling procedures. Sampling for conformance inspections shall be in accordance with MIL-STD-105, inspection level II, with an Acceptable Quality Level (AQL) of 1.5 percent defective. A sample unit shall be one tool with carrying case.

4.5 Examinations. Each sample unit shall be examined for conformance to the requirements specified in 3.3 thru 3.6 and the dimensions and weight specified in applicable table.

4.6 Test procedures.

4.6.1 Operational performance tests. Types I, II, and III riveters shall be subjected to a test to determine compliance with the requirements for air consumption (see table I, II, or III as applicable). Type IV holders-on shall be subjected to tests to determine its ability to firmly set and hold the set against the rivet head until pressure is released.

4.6.1.1 Type II, aircraft riveters. Aircraft riveters shall be subjected to a test to determine compliance with impact frequency requirements of table II.

4.6.2 Performance test conditions.

4.6.2.1 All performance tests shall be conducted with compressed air at 90 lb/in^2g measured at the end of the hose attached to the air meter. Pressure shall be maintained at 90 lb/in^2g during performance tests.

4.6.2.2 Air consumption shall be determined with either a liquid displacement meter or a flowmeter of common type. Test shall be conducted with rivet set held against a plate.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:59Z
Check the source to verify that this is the currentversion before use.

4.6.2.3 Impact frequency, for type II aircraft riveters, shall be determined using a "Askania" hand vibrograph or a suitable vibrometer. Test shall be conducted with rivet set held against a plate.

4.6.2.4 Test samples shall be connected to the air supply by means of a 10-foot length of 5/8 inch inside diameter hose having a 0.250 inch inside diameter coupling for type II and a 0.375 inch inside diameter coupling for types I, III, and IV.

4.6.3 Driver retainer test. Each tool complete with driver and retainer shall be connected to rated power source and operated "free in air" (other than under load), for a 20 second duration. Any separation of the driver or retainer from the tool shall constitute failure of this test.

4.6.4 Air leakage test. Riveters shall be tested for tightness. Riveters shall be connected to a system consisting of a 0.25 cubic foot air receiver, valving as necessary and a 0-300 lb/in^2g range pressure gage. System shall be pressurized with air or nitrogen to 150 lb/in^2g with throttle in the closed position and isolated for a period of 15 minutes. At the end of 15 minutes, maximum pressure drop permitted shall be no more than 50 lb/in^2g.

4.7 Sound pressure level test. The sound pressure level test shall be conducted in accordance with the applicable provisions of S5.1 except as modified herein. The acceptable limits shall be as specified in 3.11.

4.7.1 Acoustical calibration. The entire instrumentation system shall be calibrated before each test series allowing a minimum instrument warm-up period of 5 minutes if transistorized and 1/2 hour if vacuum tube. Recalibration shall be performed if any instrument adjustment is necessary during progress of the test.

4.7.2 Background sound level. The ambient noise level shall be at least 10 dB less than the measurement taken with the tool running in all tool and microphone orientations. In addition, the sound produced by the energy absorbing device, used in the "on load" test, must be at least 10 dBA below the machine's own sound output.

4.8 Service tests. A service test shall be conducted to determine durability of the tool and all components, ease of operation, and general serviceability. Service tests shall consist of tests in 4.8.1 and 4.8.2.


4.8.1 A simulated test shall be conducted for 150 hours. Test sample shall be placed in testing machine, see figure 7, and operated for 10 seconds on and 30 seconds off.

4.8.2 After completion of test in 4.8.1, tool shall be given a 4 hour practical service test to determine ease of operation.

4.8.3 Examination after service test. Upon completion of the service test, the tool shall be disassembled and the various parts examined. Any tool having broken, cracked, or deformed parts shall be rejected. Tools satisfactorily completing the service test shall again be subjected to the performance tests of 4.6.1, 4.6.2, 4.6.3, and 4.6.4 and shall conform to the applicable requirements of this specification.

4.9 Inspection of preparation for delivery. Sample packages and packs and the preservation and packaging, packing, and marking for shipment and storage shall be in accordance with the requirements of section 5 and the documents specified therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

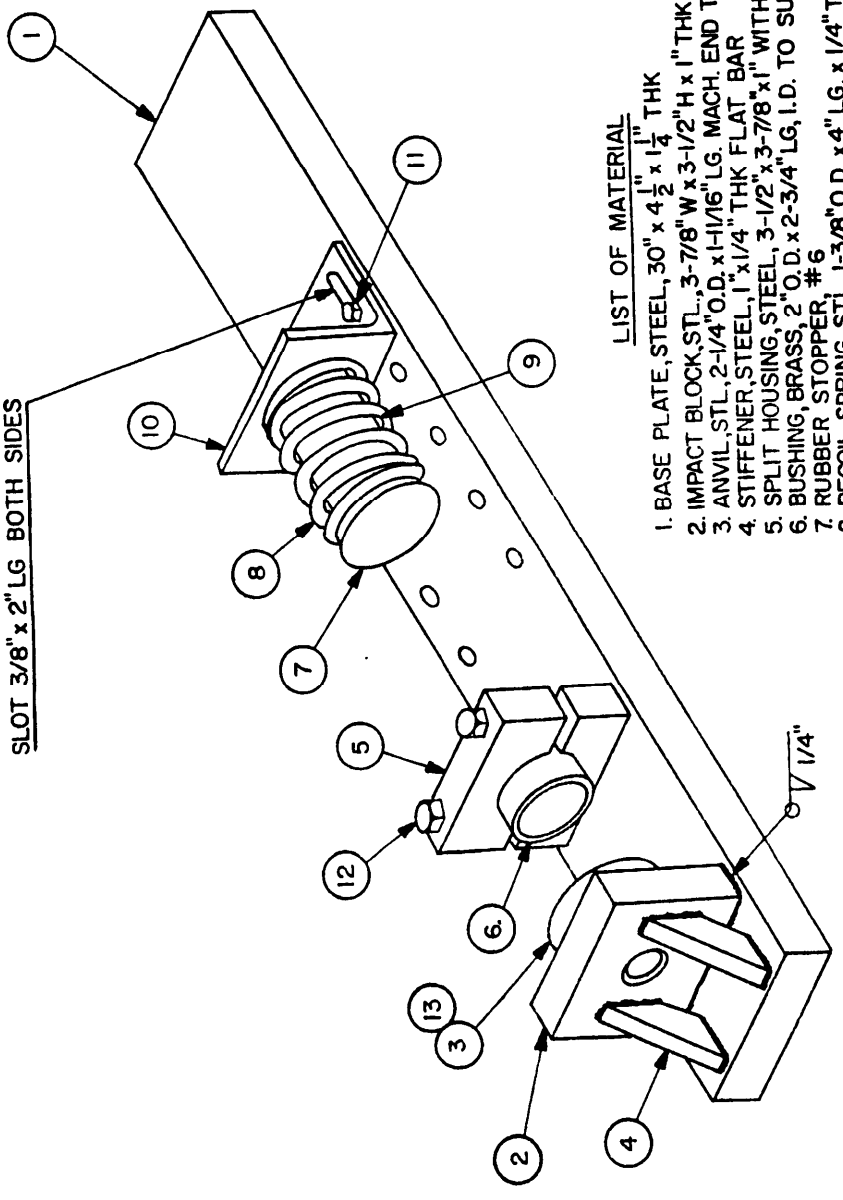

LIST OF MATERIAL

1. BASE PLATE, STEEL, 30" x 4 1/2" x 1 1/4" THK
2. IMPACT BLOCK, STL., 3-7/8" W x 3-1/2" H x 1" THK W/ 1-1/8" HOLE
3. ANVIL, STL., 2-1/4" O.D. x 1-11/16" LG. MACH. END TO 1-1/8" O.D. x 1" LONG
4. STIFFENER, STEEL, 1" x 1/4" THK FLAT BAR
5. SPLIT HOUSING, STEEL, 3-1/2" x 3-7/8" x 1" WITH 2" HOLE
6. BUSHING, BRASS, 2" O.D. x 2-3/4" LG, I.D. TO SUIT RIVETER
7. RUBBER STOPPER, #6
8. RECOIL SPRING, STL., 1-3/8" O.D. x 4" LG. x 1/4" THK, 2-1/4 COILS/INCH
9. GUIDE, STL., 3/4" I.P.S. PIPE, 3" LG.
10. RECOIL PLATE, STL., 3" ANGLE IRON, 4" LG.
11. BOLT, STL., 5/16" N.C. ONE EACH SIDE
12. BOLT, STL., 1/2" N.C. ONE EACH SIDE
13. IMPACT WASHER, RUBBER, 2-1/2" O.D. x 1-1/8" HOLE x 1/8" THK.

Figure 7 - Service testing machine for riveting hammers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing, and marking. The riveters shall be preserved, packaged, packed, and marked in accordance with PPP-P-40. Preservation and packaging shall be level A, B, or C as specified (see 6.2), packing shall be level A, B, or C as specified (see 6.2), and marking shall be for civil agencies or military agencies as specified (see 6.2). When specified (see 6.2), the gross weight for levels A and B packing shall not exceed 200 pounds.

6. NOTES

6.1 Intended use. The portable pneumatic tools covered in this specification are intended for use in riveting and rivet holding.

6.2 Ordering data.

6.2.1 Procurement requirements. Procurement documents should specify the following:

(a) Title, number, and date of this specification.
(b) Type, class, and size of pneumatic tool required (see 1.2.1).
(c) Style of handle for riveting hammers (see 3.7.1 and 3.8.1).
(d) Whether pistons (holders-on) are to be of the center or offset type (see 3.10.1) and whether long or short sizes are required for holders-on (see 3.10.2).
(e) Size of pneumatic tool required (see applicable table and 3.10.2).
(f) Level of preservation and packaging, packing and marking required (see 5.1).
(g) When maximum gross weight should not exceed 200 pounds (see 5.1).

6.3 With respect to products requiring qualification, awards will be made only for products which are at the time set for opening of bids, qualified for inclusion in applicable Qualified Products List QPL 00-R-421, whether or not such products have actually been so listed by that date. The attention of the suppliers is called to this requirement, and manufacturers are urged to arrange to have the products that they propose to offer to the Federal Government tested for qualification in order that they may be eligible to be awarded contracts or orders for the products covered by this specification. The activity responsible for the Qualified Products List is the Naval Ship Engineering Center, Prince George's Center, Center Building, Hyattsville, Maryland 20782, and information pertaining to qualification of products may be obtained from that activity. Application for Qualification tests shall be made in accordance with "Provisions Governing Qualification SD-6" (see 6.3.1).

6.3.1 Copies of "Provisions Governing Qualification SD-6" may be obtained upon application to Commanding Officer, Naval Publications and Forms Center, 5801 Tabor Avenue, Philadelphia, Pennsylvania 19120.

Custodians:
Army - GL
Navy - SH
Air Force - 84

Review activities:
Army - GL
Navy - SH
Air Force - 84

User activities:
Army - ME
Navy - CG, MC

Preparing activity:
Navy - SH
(Project 5130-0224)

Orders for this publication are to be placed with General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 40 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
OO-R-421B, Riveter, Pneumatic, Jam & Hammer; & Holder-On

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A
☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?
   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

S/N 0102-014-1802

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:59Z
Check the source to verify that this is the current version before use.

FOLD

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF NAVY

DOD 316

U.S.MAIL

COMMANDER
NAVAL SHIP ENGINEERING CENTER
CENTER BUILDING - SEC 6124
PRINCE GEORGES CENTER
HYATTSVILLE, MARYLAND 20782

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:59Z
Check the source to verify that this is the current version before use.