MILITARY STANDARD

AUTOMATED ENGINEERING
DOCUMENT PREPARATION SYSTEM

SCREWS

TO ALL HOLDERS OF DOD-STD-35-17A(MI):

1. THE F OLLOWING PAGES OF DOD-STD-35-17A(MI) HAVE BEEN REVISED AND SUPERSEDE THE PAGES LISTED:

NEW PAGE	DATE	SUPERSEDED PAGE	DATE
1	17 March 1980	1	26 July 1978
2	26 July 1978	(Reprinted without change)	26 July 1978
17	17 March 1980	17	26 July 1978
18	26 July 1978	(Reprinted without change)	26 July 1978
21	17 March 1980	21	26 July 1978
22	26 July 1978	(Reprinted without change)	26 July 1978
29	17 March 1980	29	26 July 1978
35	26 July 1978	(Reprinted without change)	26 July 1978
36	17 March 1980	36	26 July 1978
37	17 March 1980	37	26 July 1978
38	26 July 1978	(Reprinted without change)	26 July 1978
41	26 July 1978	(Reprinted without change)	26 July 1978
42	17 March 1980	42	26 July 1978
43	17 March 1980	43	26 July 1978
44	17 March 1980	44	26 July 1978
45	17 March 1980	45	26 July 1978
46	26 July 1978	(Reprinted without change)	26 July 1978
51	26 July 1978	(Reprinted without change)	26 July 1978
52	17 March 1980	52	26 July 1978
53	17 March 1980	53	26 July 1978
54	17 March 1980	54	26 July 1978
55	17 March 1980	55	26 July 1978
56	26 July 1978	(Reprinted without change)	26 July 1978
71	26 July 1978	(Reprinted without change)	26 July 1978
72	17 March 1980	72	26 July 1978
73	17 March 1980	73	26 July 1978
74	26 July 1978	(Reprinted without change)	26 July 1978
99	26 July 1978	(Reprinted without change)	26 July 1978

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

2. THE FOLLOWING PAGES HAVE BEEN ADDED:

NEW PAGE	DATE	NEW PAGE	DATE
99a	17 March 1980	99g	17 March 1980
99b	17 March 1980	99h	17 March 1980
99c	17 March 1980	99i	17 March 1980
99d	17 March 1980	99j	17 March 1980
99e	17 March 1980	99k	17 March 1980
99f	17 March 1980	99l	17 March 1980

3. RETAIN THIS NOTICE PAGE AND INSERT BEFORE THE TABLE OF CONTENTS.

4. Holders of DOD-STD-35-17A(MI) will verify that page changes and additions indicated above have been entered. The notice page will be retained as a check sheet. This issuance, together with appended pages is a separate publication. Each notice is to be retained by stocking points until the Military Standard is completely revised or canceled.

Custodians:
Army - MI

Review activities:
Army - AT
Army - AV
Army - ER
Army - ME
Army - MR
Army - SG
Army - CR

User activity:
Army - AR

Preparing activity:
Army - MI

(Project EDS-A308)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Screws.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (DOD-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in DOD-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. It is recommended that MIL-STD-1251, Screws and Bolts Preferred for use in Military Materiel be reviewed prior to using this dash-numbered part book.

The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE's for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE I. TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SCREW, BONE	150002	MIL-S-36653	82 DEG CTSK HD PILOT POINT
SCREW, CAP, SLOTTED AND HEXAGON HEAD	150003	FF-S-85	SLTD AND PLAIN
		MS18153	HEX HEAD, DR, GRADE 8, CAD PLATE, UNF-2A
		MS18154	HEX HEAD, DR, GRADE 8, CAD PLATE, UNC-2A
		MS35295	HEX HEAD, MED CARBON STEEL, PLAIN, UNC-2A
		MS35307	HEX HEAD, CRES-PSVT, UNC-2A
		MS35308	HEX HEAD, CRES-PSVT, UNF-2A
		MS35309	HEX HEAD, NAVAL BRASS, PLAIN FINISH, UNC-2A
		MS35310	HEX HEAD, NAVAL BRASS, PLAIN FINISH, UNF-2A
		MS35311	HEX HEAD, NI-CU ALLOY, PLAIN FINISH, UNC-2A

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SCREW, SHOULDERED, SLOTTED	150024	MIL-S-21472	HEXAGON, ALLOY STEEL
		MS51975	SOCKET HEAD, HEX, ALY STL, CAD PL, UNC-3A
SCREW, STRUCTURAL, AIRCRAFT	150001	MIL-S-7839	AIRCRAFT
SCREW, TAPPING, THREAD FORMING	150018	FF-S-107	DRIVE, CUTTING
		MS51861	PAN HD TYPE AB
		MS51862	FLAT HD, 82 DEG TYPE AB
		AN530	ROUND HEAD, SPACED THREAD
		AN531	FLAT HEAD, 82 DEG, SPACED THREAD
SCREW, TAPPING, THREAD ROLLING	150019	MS51863	PAN HEAD CROSS RECESSED
		MS21207	FLAT, 100 DEG, SPACED THREAD
SCREW, THUMB	150020	FF-T-305	SHOULDERED
		AN254	THUMB, NECKED
		MS21316	FLAT POINT CAD PLATED, UNC-2A
SCREW, WASHER HEAD	150021	MS9206	STEEL,.138-40 AMS6304 UNJF-3A
		MS9207	STEEL,.164-36 AMS6304 UNJF-3A
		MS9216	STEEL,.164-36 AMS6304 UNJF-3A

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX. (CONT)

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
SCREW, WASHER HEAD	150021 (CONT)	MS9563	PD SHK,.138-40 AMS5731
		MS9564	DRILLED,.164-36
		MS9572	PD SHK, SILVER PLATED, UNJF-3A
		MS9573	PD SHK, SILVER PLATED,.164-36. UNJF-3A
		MS9694	AMS5708,.138-40 UNJF-3A
		MS9695	AMS5708,.164-36 UNJF-3A
		MS9712	DRILLED, SIL PL AMS5708 .138-40
		MS9713	DRILLED, SIL PL AMS5708,.164-36
		MS9730	PD SHK, CRES, AMS5643 .138-40
		MS9731	PD SHK, CRES, .164-36,UNJF-3A
		MS9739	DRILLED, CRES, .138-40,UNJF-3A
		MS9740	DRILLED, CRES, AMS5643 .164-36
		MS9748	TITANIUM, .138-40 AMS4967
		MS9749	PD SHK, AMS4967 .164-36
		MS9883	AMS5616,.138-40 UNJF-3A

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

2. REFERENCED DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this standard to the extent specified herein.

SPECIFICATIONS

FEDERAL

FF-S-85	Screw, Cap, Slotted and Hexagon Head
FF-S-92	Screw, Machine, Slotted, Cross Recessed or Hexagon Head
FF-S-107	Screw, Tapping and Drive

MILITARY

MIL-I-17214	Indicator, Permeability, Low MU(Go-No-Go)

STANDARDS

FEDERAL

FED-STD-151	Metal, Test Methods

MILITARY

DOD-STD-35	Automated Engineering Document Preparation System
MIL-STD-130	Identification Marking of Military Property
MIL-STD-1251	Screws and Bolts Preferred for use in Military Materiel
MIL-STD-1312	Fasteners, Test Methods

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this standard to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

ANSIB46.1	Surface Texture
ANSIB18.6.4	Slotted and Recessed Head Tapping Screws and Metallic Drive Screws

(Application for copies should be addressed to American National Standards Institute (ANSI), 1430 Broadway, New York, N.Y. 10018.)

ASTMA370	Method and Definitions for Mechanical Testing of Steel Products
ASTME8	Tension Testing of Metallic Materials, Methods Of
ASTME10	Method of Test for Brinell Hardness of Metallic Materials
ASTME18	Rockwell Hardness and Rockwell Superficial Hardness of Metallic Materials, Test For
ASTME151	Tension Tests of Material at Elevated Temperatures with Rapid Heating and Conventional or Rapid Strain Rates, Recommended Practice For
ASTME380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race St., Philadelphia, Pa. 19103.)

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

TABLE III. TABULATION CANDIDATES.

CODE	COLUMN HEADING	CODE	COLUMN HEADING	CODE	COLUMN HEADING
1600	US THREAD (DES)	1601	US THREAD (DOC DES)	1611	US THREAD RH OR LH
1612	TOP PANEL GRIP MIN INCHES	1614	TOP PANEL GRIP MIN MILLIMETER	1616	TOP PANEL GRIP MAX INCHES
1618	TOP PANEL GRIP MAX MILLIMETER	1620	PANEL/STR GRIP MIN INCHES	1622	PANEL/STR GRIP MIN MILLIMETER
1624	PANEL/STR GRIP MAX INCHES	1626	PANEL/STR GRIP MAX MILLIMETER	1630	SI THREAD (DES)
1632	SI THREAD (DOC DES)	1634	SI THREAD RH OR LH	6996	NOM WT EA OUNCES
6997	NOM WT EA POUNDS	6998	NOM WT EA GRAMS	6999	NOM WT EA KILOGRAMS
7021	MAX WT EA GRAMS	7022	MAX WT EA OUNCES	7023	MAX WT EA POUNDS
7024	MAX WT EA KILOGRAMS	7041	MAX WT PER 100, OUNCES	7042	MAX WT PER 100, POUNDS
7043	MAX WT PER 100, GRAMS	7044	MAX WT PER 100, KILOGRAMS	1900	HARDNESS (DES)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE.
	PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER.
	PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER.
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGREES.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTERNATIONAL SYSTEM OF UNITS (SI) OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CLASSIFICATION	
IN ACCORDANCE WITH THE BASE DOCUMENT	
TYPE (DESIGNATION)	1670
GRADE (DESIGNATION)	1672
CLASS (DESIGNATION)	1674
STYLE (DESIGNATION)	1676
COMPOSITION (DESIGNATION)	1678
TEMPERATURE RATING	
MAXIMUM SERVICE (DEGREES CELSIUS)	4905

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1670	TYPE. TYPE 1670 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1672	GRADE. GRADE 1672 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1674	CLASS. CLASS 1674 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1676	STYLE. STYLE 1676 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
1678	COMPOSITION. COMPOSITION 1678 IN ACCORDANCE WITH THE BASE DOCUMENT SHALL APPLY.
4905	THE MAXIMUM SERVICE TEMPERATURE RATING SHALL BE 4905 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, DOD-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7572
(FEET)	7573
(YARDS)	7574
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577
(METERS)	7578
ILLUSTRATIONS	
(NUMBER), SEE APPENDIX A	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, DOD-STD-35)	

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

MATERIAL(S). MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

FINISH(S). FINISH(S) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)

7580 METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

1680 BEARING SURFACE OF SHOULDER. THE DEVIATION OF THE SHOULDER BEARING SURFACE FROM THE 90 DEGREE CENTRAL AXIS OF THE SCREW SHALL BE NOT GREATER THAN 1680 DEGREES.

COLOR.

1682 THE COLOR SHALL BE 1682.

1684 COLOR DESIGNATION 1684 SHALL APPLY.

1686 THE COLOR SHALL BE IN ACCORDANCE WITH 1686.

1688 COLOR CLASS NUMBER 1688 SHALL APPLY.

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
KNURLING	
PER DOCUMENT (DOC DES)	1700
TYPE (SELECT ONE)	
SPIRAL.	1704
DIAMOND.	1706
90 DEGREE "V".	1708
CLASS (SELECT ONE)	
FINE.	1710
MEDIUM.	1712
COARSE.	1714
THREAD DESIGNATION (SELECT ONE)	
U.S.	
THREAD (DESIGNATION)	1600
PER DOCUMENT (DOC DES)	1601
THREAD DIRECTION (RH OR LH)	1611
MODIFIED THREAD (DESIGNATION)	1613

NOTE: US THREADS MAY INCLUDE NOMINAL SIZE (MAJOR DIAMETER IN DECIMALS), NUMBER OF THREADS PER INCH, THREAD SERIES SYMBOLS, AND CLASS SYMBOLS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	KNURLING.
1700	KNURLING SHALL BE IN ACCORDANCE WITH 1700.
1704	KNURLING SHALL BE OF THE SPIRAL TYPE.
1706	KNURLING SHALL BE OF THE DIAMOND TYPE.
1708	KNURLING SHALL BE OF THE 90 DEGREE V TYPE.
1710	KNURLING SHALL BE OF THE FINE CLASS.
1712	KNURLING SHALL BE OF THE MEDIUM CLASS.
1714	KNURLING SHALL BE OF THE COARSE CLASS.
	THREAD DESIGNATION.
1600	THE THREAD(S) SHALL BE 1600.
1601	THE THREAD(S) SHALL BE IN ACCORDANCE WITH 1601.
1611	THE THREAD DIRECTION SHALL BE 1611.
1613	THE MODIFIED THREAD SHALL BE 1613.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
THREAD DESIGNATION (CONT)	
SI	
PER DOCUMENT (DOC DES)	1630
THREAD (DESIGNATION)	1632
THREAD DIRECTION (LH OR RH)	1634
MINIMUM TOP PANEL GRIP THICKNESS (SELECT ONE)	
(INCHES)	1612
(MILLIMETERS)	1614
MAXIMUM TOP PANEL GRIP THICKNESS (SELECT ONE)	
(INCHES)	1616
(MILLIMETERS)	1618
MINIMUM PANEL/STRUCTURE GRIP THICKNESS (SELECT ONE)	
(INCHES)	1620
(MILLIMETERS)	1622

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1630	THE THREAD(S) SHALL BE IN ACCORDANCE WITH 1630.
1632	THE THREAD(S) SHALL BE 1632.
1634	THE THREAD DIRECTION SHALL BE 1634.
	TOP PANEL GRIP THICKNESS.
1612	THE TOP PANEL GRIP THICKNESS SHALL BE NOT LESS THAN 1612 INCH(S).
1614	THE TOP PANEL GRIP THICKNESS SHALL BE NOT LESS THAN 1614 MILLIMETERS.
1616	THE TOP PANEL GRIP THICKNESS SHALL BE NOT GREATER THAN 1616 INCH(S).
1618	THE TOP PANEL GRIP THICKNESS SHALL BE NOT GREATER THAN 1618 MILLIMETERS.
	PANEL/STRUCTURE GRIP THICKNESS.
1620	PANEL/STRUCTURE GRIP THICKNESS SHALL BE NOT LESS THAN 1620 INCH(S).
1622	PANEL/STRUCTURE GRIP THICKNESS SHALL BE NOT LESS THAN 1622 MILLIMETERS.

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN AND CONSTRUCTION (CONT)	
MAXIMUM PANEL/STRUCTURE GRIP THICKNESS (SELECT ONE)	
(INCHES)	1624
(MILLIMETERS)	1626
WEIGHT	
MAXIMUM WEIGHT PER UNIT (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7022
(POUNDS)	7023
SI (SELECT ONE)	
(GRAMS)	7021
(KILOGRAMS)	7024
MAXIMUM WEIGHT PER 100 (SELECT ONE)	
U.S. (SELECT ONE)	
(OUNCES)	7041
(POUNDS)	7042

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2185	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2185.
2187	BENDING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FF-S-92.
2173	CARBURIZATION AND DECARBURIZATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2173.
2174	CARBURIZATION AND DECARBURIZATION. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2176	THE DECARBURIZED DEPTH SHALL BE NOT GREATER THAN 2176 INCH(S).
2177	THE DECARBURIZED DEPTH SHALL BE NOT GREATER THAN 2177 MILLIMETER(S).
2178	THE PERCENT OF THE SECTIONAL THICKNESS SHALL BE NOT GREATER THAN 2178 PERCENT.
2175	THE DECARBURIZATION OF THE THREAD AREA SHALL BE NOT GREATER THAN THE LIMITS SHOWN IN FF-S-85.
2161	CARBURIZATION AND DECARBURIZATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2161.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CARBURIZATION AND DECARBURIZATION (CONT)	
TEST METHODS (CONT)	
PER FF-S-85.	2163
CHEMICAL ANALYSIS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2250
AS FOLLOWS:	2252
SUPPLIER CERTIFICATION.	2254
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2260
PER DOCUMENT (DOC DES)	2262
METHOD (NUMBER)	2264
HARDNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1893
HARDNESS (DESIGNATION)	1900

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2163	CARBURIZATION AND DECARBURIZATION. TESTING SHALL BE IN ACCORDANCE WITH FF-S-85.
2250	CHEMICAL ANALYSIS. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2250.
2252	CHEMICAL ANALYSIS. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2254	SUPPLIER CERTIFICATION MAY BE ACCEPTED IN LIEU OF A SPECIFIC CHEMICAL ANALYSIS.
2260	CHEMICAL ANALYSIS. TESTING SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2260.
2262	CHEMICAL ANALYSIS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2262.
2264	TEST METHOD 2264 SHALL APPLY.
1893	HARDNESS. THE HARDNESS SHALL BE IN ACCORDANCE WITH THE BASE DOCUEMENT, EXCEPT 1893.
1900	HARDNESS. THE HARDNESS SHALL BE 1900.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HARDNESS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1881
PER DOCUMENT (DOC DES)	1885
TEST METHOD (NUMBER)	1887
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4798
NO CORROSION OR DAMAGE.	4799

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1881	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1881.
1885	HARDNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1885.
1887	TEST METHOD 1887 SHALL APPLY.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	4788
PER MIL-STD-1312, TEST 3.	4881
TEST DURATION (HOURS)	4816
HYDROGEN EMBRITTLEMENT	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2147
AS FOLLOWS:	2148
NO EMBRITTLEMENT FROM PLATING PROCESS.	2149
EMBRITTLEMENT RELIEF PER PLATING DOCUMENT.	2151
EMBRITTLEMENT SHALL BE MINIMIZED.	2154
SUPPLIER CERTIFICATION.	2156

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2410	STRESS RUPTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2410.
2412	STRESS RUPTURE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH TEST 10 OF MIL-STD-1312.
2414	THE NOMINAL TEST LOAD SHALL BE 2414 THOUSAND POUNDS PER SQUARE INCH.
2416	THE NOMINAL TEST LOAD SHALL BE 2416 MEGAPASCAL(S).
2418	THE TEST TEMPERATURE SHALL BE 2418 DEGREES CELSIUS.
2420	THE TEST TEMPERATURE TOLERANCE SHALL BE PLUS OR MINUS 2420 DEGREES CELSIUS.
2422	THE TEST DURATION SHALL BE 2422 HOUR(S).
2087	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2087.
2089	SURFACE DEFECTS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE LIMITATIONS OF FF-S-85.
2092	SURFACE DEFECTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2092.
2094	SURFACE DEFECTS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH FF-S-85.

Reprinted without change

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SURFACE ROUGHNESS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2073
AS FOLLOWS:	2074
MAXIMUM ROUGHNESS HEIGHT, ARITHMETICAL AVERAGE	
SCREW HEAD AND SHANK (SELECT ONE)	
(MICROINCHES)	2076
(MICROMETERS)	2078
SCREW THREAD (SELECT ONE)	
(MICROINCHES)	2080
(MICROMETERS)	2082
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	2090
PER ANSIB46.1.	2096

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.


CHAR CODE	STANDARD PARAGRAPH
2073	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2073.
2074	SURFACE ROUGHNESS. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
2076	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SCREW HEAD AND SHANK SHALL BE NOT GREATER THAN 2076 MICROINCH(S).
2078	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SCREW HEAD AND SHANK SHALL BE NOT GREATER THAN 2078 MICROMETER(S).
2080	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SCREW THREAD SHALL BE NOT GREATER THAN 2080 MICROINCH(S).
2082	THE ARITHMETICAL AVERAGE ROUGHNESS HEIGHT OF THE SCREW THREAD SHALL BE NOT GREATER THAN 2082 MICROMETER(S).
2090	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2090.
2096	SURFACE ROUGHNESS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH ANSIB46.1.


Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)


CHARACTERISTIC NAME	CHAR CODE
TENSILE STRENGTH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT EXCEPT ____	1775
AS FOLLOWS:	1776
MINIMUM ULTIMATE TENSILE STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1778
(MEGAPASCALS)	1780
MINIMUM TENSILE YIELD STRENGTH (SELECT ONE)	
(THOUSAND POUNDS PER SQUARE INCH)	1782
(MEGAPASCALS)	1784
MAXIMUM REDUCTION IN AREA (PERCENT)	1786
MINIMUM PROOF STRENGTH (SELECT ONE)	
(POUNDS)	1785
(NEWTONS)	1788

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

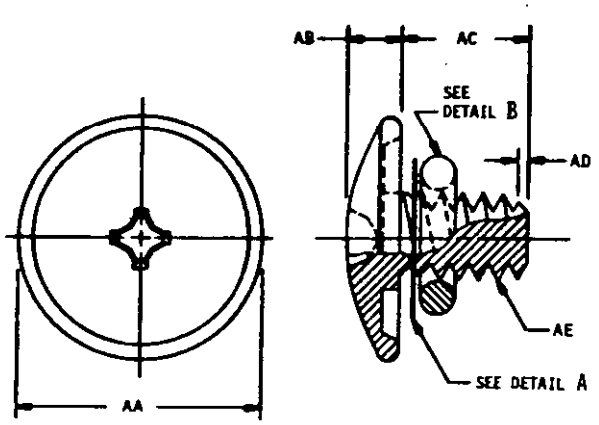




DETAIL A




DETAIL B

150-01-29

Reprinted without change
Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

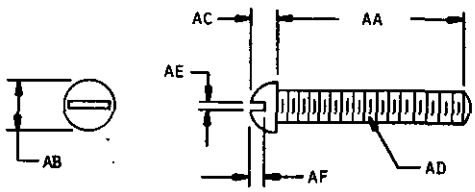


150-01-30

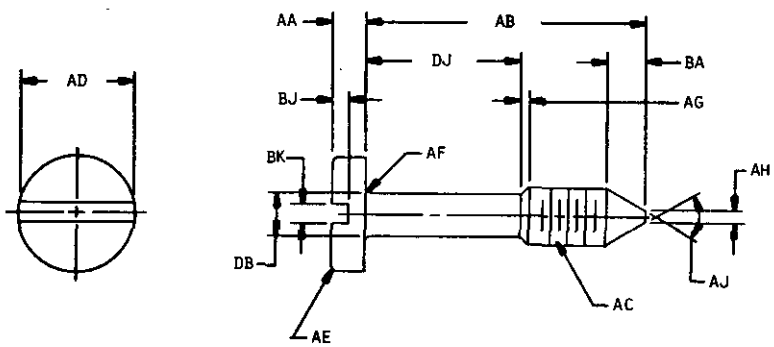


150-01-31

New page

Source: https://assist.dla.mil -- Downloaded: 202640-23T20:54Z
Check the source to verify that this is the currentversion before use.

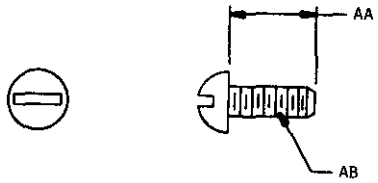


150-01-32

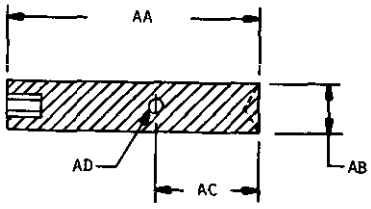


150-01-33

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

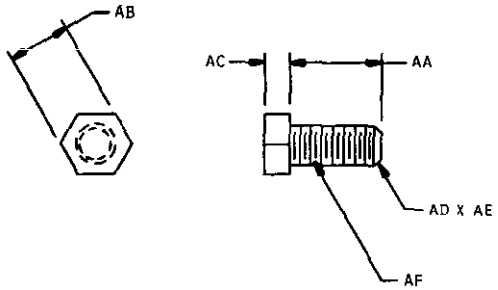


150-01-34

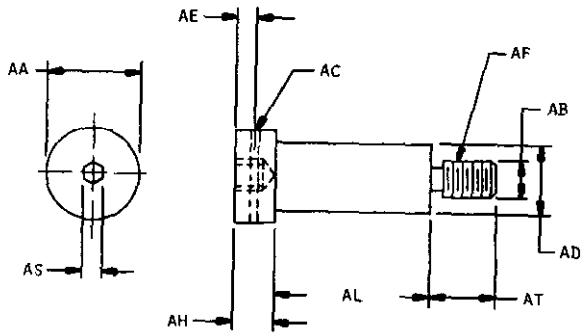


150-01-35

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

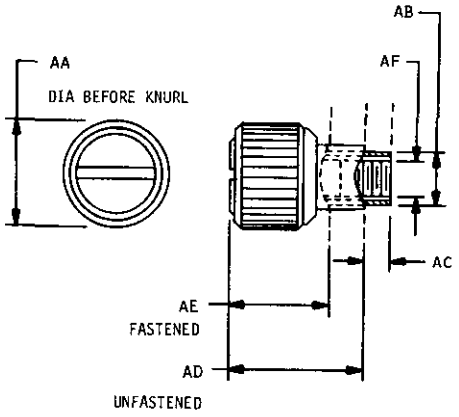


150-01-36

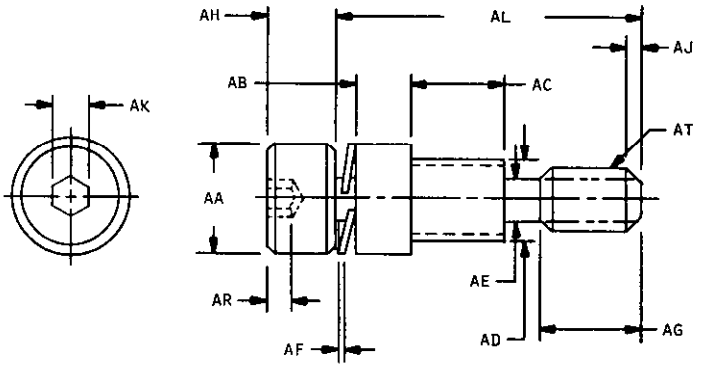


150-01-37

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

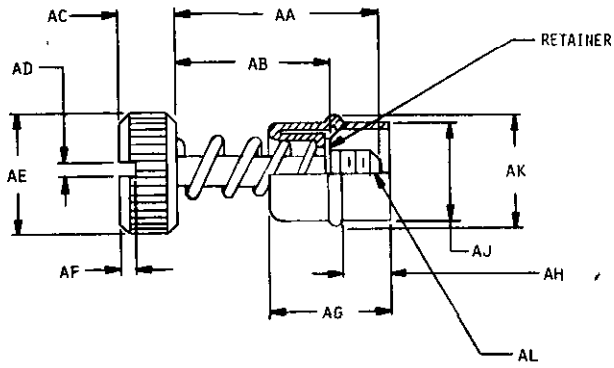


150-01-38

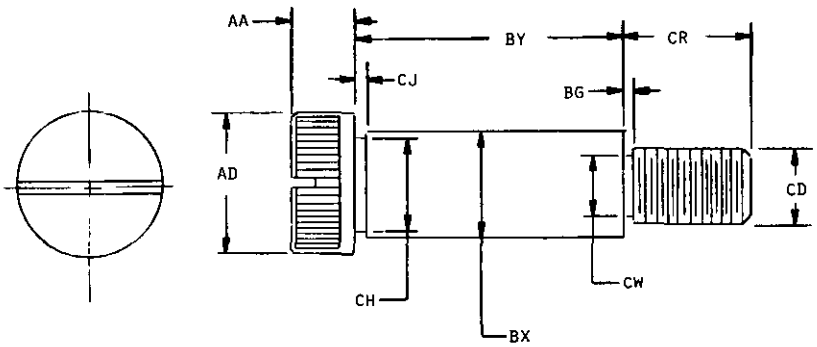

150-01-39

New page


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

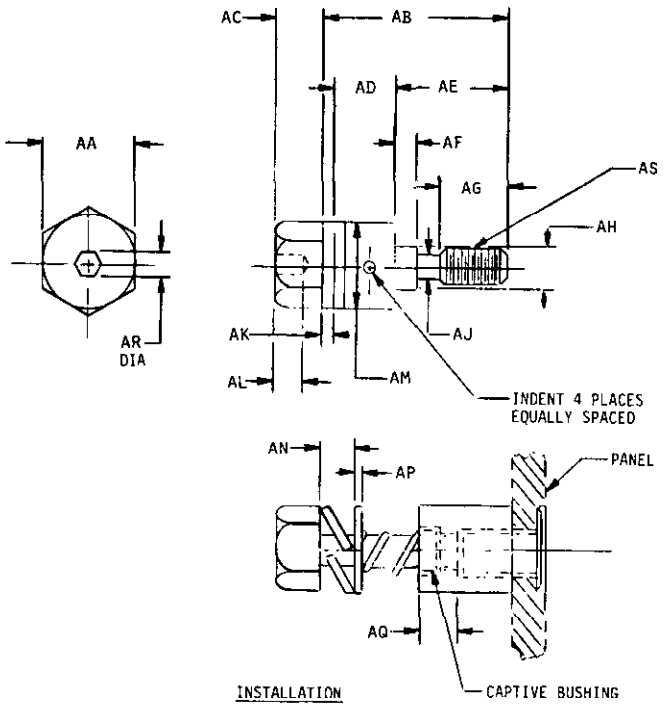


150-01-40

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

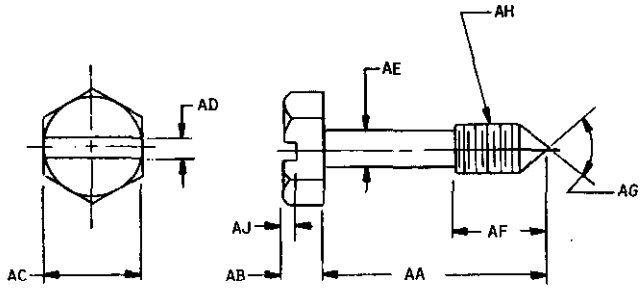


150-01-41

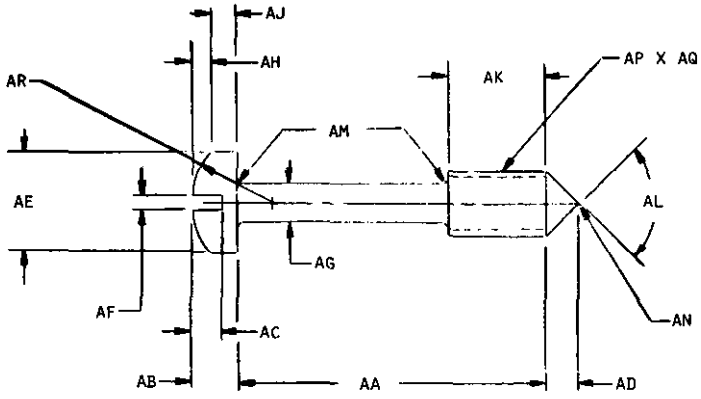


150-01-42

New page

Source: https://assist.dla.mil -- Downloaded: 202610-23T20:54Z
Check the source to verify that this is the current version before use.

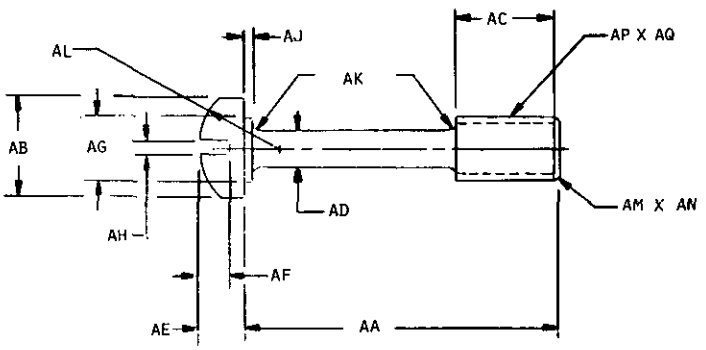


150-01-43

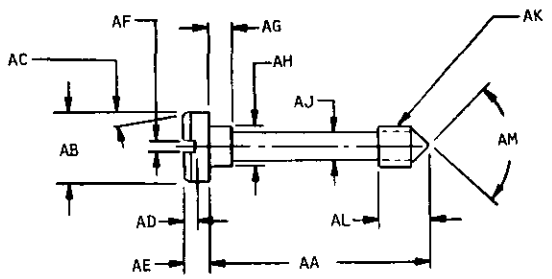


150-01-44

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

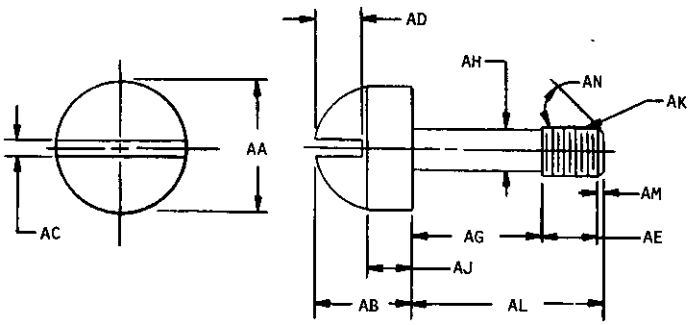


150-01-45

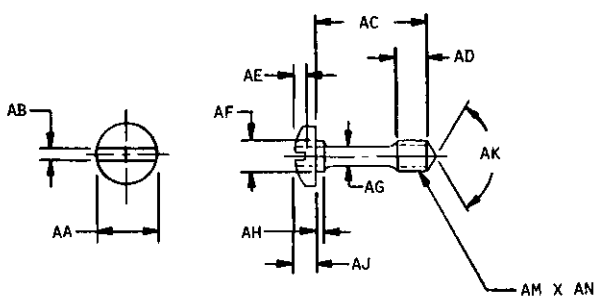


150-10-2

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

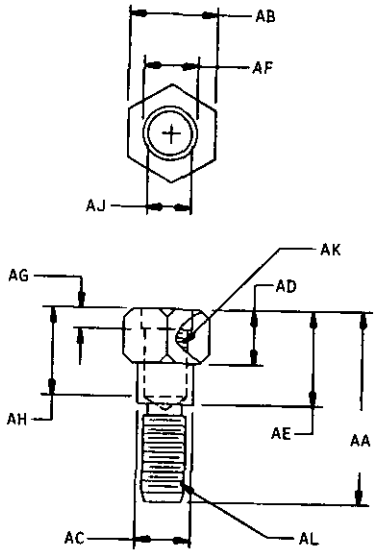


150-11-1

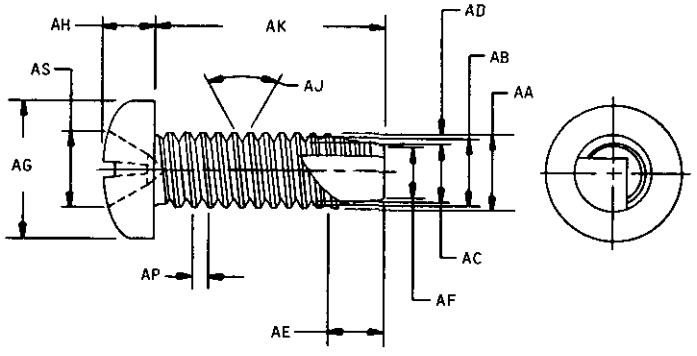


150-12-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

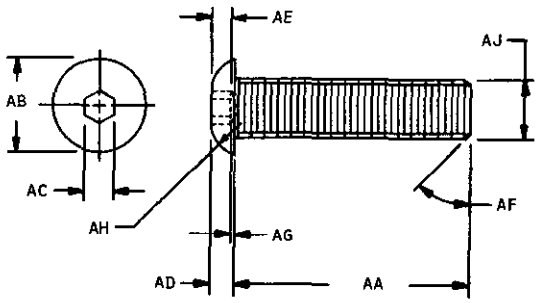


150-13-1

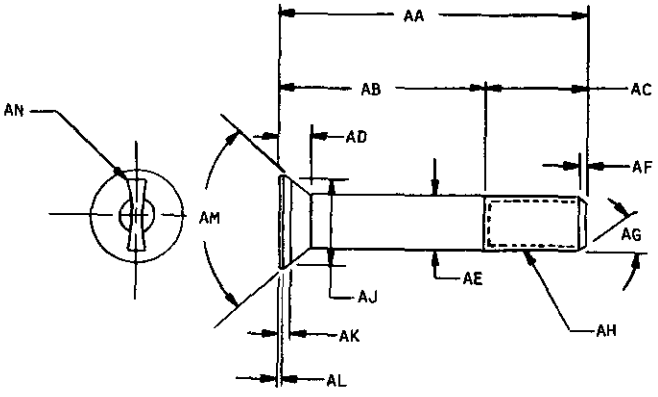

150-14-1

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.

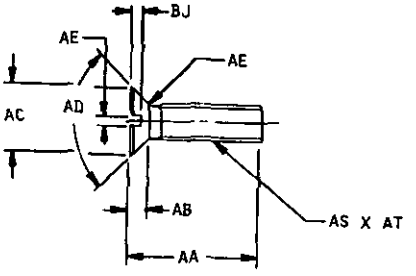

150-14-2

New page

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:54Z
Check the source to verify that this is the current version before use.