| NOT MEASUREMENT |
| SENSITIVE |

MIL-C-52913A
19 January 1989
SUPERSEDING
MIL-C-52913
5 October 1976

MILITARY SPECIFICATION

CONTROL, ELECTRONIC ACCESS

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers an electronic device for control of access, in accordance with DOD 5220.22-M, to interior sensitive classified areas.

1.2 Classification. The electronic access controls covered by this specification is classified by the following types, input voltage, styles, and optional monitoring components as specified (see 6.2).

TYPES

Type I - Weather resistant switch panel.
Type II - Non-weather resistant switch panel.

INPUT VOLTAGES

Voltage A - 115 Volts (V), 50 to 60 Hertz (Hz), single phase.
Voltage B - 220V, 50 Hz, single phase.

STYLES

Style 1 - Electric door strike for use with standard mortise-type locks having a latch bolt.
Style 2 - Electric door strike for use with cylindrical (bored) type mortise locks having a latch bolt.
Style 3 - Electric door strike for use with deadbolt type latch.
Style 4 - Electric door strike for use with rim-type or surface-type installation.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commanding Officer (Code 156), Naval Construction Battalion Center, Port Hueneme, CA 93043-5000, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 6350


DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T21:39Z
Check the source to verify that this is the current version before use.

OPTIONAL MONITORING COMPONENTS

Option A - Equipped with an annunciator and buzzer system for visitors.
Option B - Equipped with an alarm and alarm system bypass.
Option C - Equipped with an annunciator and buzzer system and an alarm and alarm bypass system.
Option N - Not equipped with any optional monitoring components.

1.2.1 Part identification number (PIN). The electronic access controls furnished under this specification should be identified by a PIN consisting of the "M" prefix and basic specification number, followed by a code number. The code number identifies the type, input voltage, style, and optional monitoring components as shown in the following example:

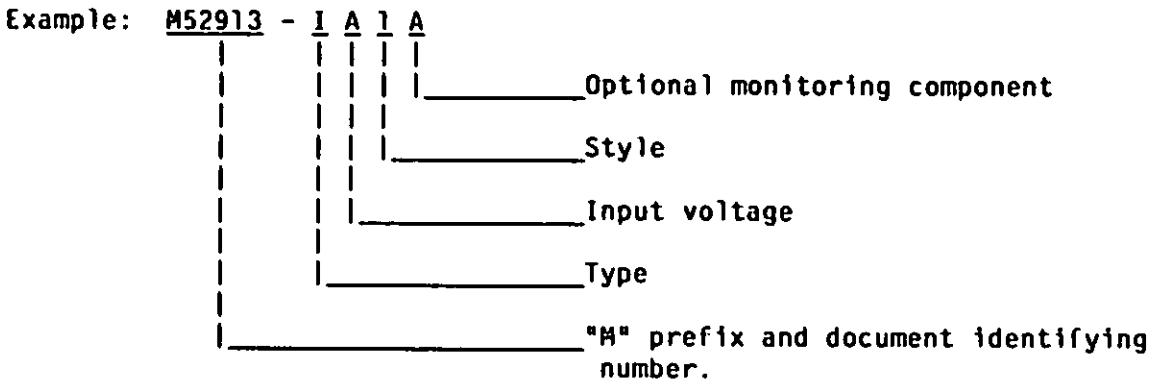

The above example identifies an electronic access control equipped with a weather resistant switch panel; operates on 115V, 50 Hz, or 60 Hz, single phase input voltage; provided with an electric door strike for use with standard mortise-type locks having a latch bolt; and equipped with an annunciator and buzzer system for visitors.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

MILITARY

MIL-E-17555 - Electronic and Electrical Equipment, Accessories, and Provisioned Items (Repair Parts): Packaging of.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

MIL-V-173 - Varnish, Moisture-and-Fungus-Resistant (for Treatment of Communications, Electronic, and Associated Equipment).
MIL-S-901 - Shock Tests, HI (High Impact); Shipboard Machinery, Equipment and Systems, Requirements for.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-454 - Standard General Requirements for Electronic Equipment.
MIL-STD-461 - Electromagnetic Emission and Susceptibility Requirements for the Control of Electromagnetic Interference.
MIL-STD-462 - Electromagnetic Interference Characteristics, Measurement of.
MIL-STD-810 - Environmental Test Methods.

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.1.2 Other Government documents. The following other Government documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

DEPARTMENT OF DEFENSE (DOD)

DOD 5220.22-M - Industrial Security Manual for Safeguarding Classified Information.

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington, DC 20402.)

2.2 Non-Government publications. The following document(s) form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents which is current on the date of the solicitation (see 6.2).

BUILDERS HARDWARE MANUFACTURING ASSOCIATION (BHMA)

BHMA A156.5 - Standard for Auxiliary Locks and Associated Products.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the currentversion before use.

(Application for copies should be addressed to the Builders Hardware Manufacturing Association, Inc., 60 East 42nd Street, New York, NY 10165.)

NATIONAL ELECTRICAL MANUFACTURERS ASSOCIATION (NEMA)

NEMA ICS 6 - Enclosures for Industrial Controls and Systems.
NEMA ICS 250 - Enclosures for Electrical Equipment (1000 Volts Maximum).

(Applications for copies should be addressed to the National Electrical Manufacturers Association, 2101 L Street, N.W., Washington, DC 20037.)

STEEL DOOR INSTITUTE (SDI)

SDI-100 - Recommended Specification - Standard Steel Doors and Frames.

(Applications for copies should be addressed to the Steel Door Institute, 712 Lakewood Center North, 14600 Detroit Avenue, Cleveland OH 44102.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein (except for associated detail specifications, specification sheets or MS standards), the text of this specification takes precedence. Nothing in this specification, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Description. The electronic access control (referred to in this specification as the control unit) shall consist of a switch panel (see 3.9), an electronic control box (see 3.10), with power and control cables (see 3.11), a 24V direct current (dc) standby power system (see 3.13), and an electrically released door strike (see 3.14) with mounting hardware and monitoring devices. When specified, the control shall meet the environmental shock requirements of 3.6.2. The control shall operate for a minimum of 100,000 continuous cycles at 6 cycles per minute. The control shall meet all applicable requirements of DOD 5220.22-M for supplanting and supplemental electronic, mechanical, and electromechanical access control devices.

3.2 Standard commercial product. The control shall, as a minimum, be in accordance with the requirements of this specification and may be the manufacturer's standard commercial product. Additional or better features which are not specifically prohibited by this specification but which are a part of the manufacturer's standard commercial product, shall be included in the control being furnished. A standard commercial product is a product which

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

has been sold or is being currently offered for sale on the commercial market through advertisements or manufacturer's catalogs, or brochures, and represents the latest production model.

3.3 Samples for testing.

3.3.1 Bid samples. Unless otherwise specified (see 6.2), each bidder shall furnish with the bid, four samples of the complete access control they propose to furnish under contract for inspection and testing as required sections 3 and 4 of this specification. The test samples and results become the property of the Government and are not returnable to maintain the integrity of test procedures. Other special requirements may be imposed by the Government on individual and subsequent contracts.

3.3.2 First article. When specified in the contract or purchase order, (see 6.2), two samples shall be subjected to first article inspection (see 4.2.1 and 6.4). As specified in the contract when bid sample testing is waived (see 6.2), four samples shall be furnished for first article testing and approval. Tested units and detailed results become the property of the Government top maintain the integrity of test procedures.

3.4 Materials. Materials used shall be free from defects which would adversely affect the performance or maintainability of individual components or of the overall assembly. Materials not specified herein shall be of the same quality used for the intended purpose in commercial practice. Unless otherwise specified herein, all equipment, material, and articles incorporated in the work covered by this specification are to be new and fabricated using materials produced from recovered materials to the maximum extent possible without jeopardizing the intended use. The term "recovered materials" means materials which have been collected or recovered from solid waste and reprocessed to become a source of raw materials, as opposed to virgin raw materials. Unless otherwise specified, none of the above shall be interpreted to mean that the use of used or rebuilt products are allowed under this specification.

3.5 Interchangeability. All units of the same classification furnished with similar options under a specific contract shall be identical to the extent necessary to insure interchangeability of component parts, assemblies, accessories, and spare parts.

3.6 Environmental requirements.

3.6.1 Storage. The control shall not be damaged by storage in any ambient temperature of -30 degrees Fahrenheit (°F) [-34 degrees Celsius (°C)] for 6 hours, nor in an ambient temperature of +160°F (+71°C) with relative humidity of from 10 to 85 percent for a period of 4 hours.

3.6.2 Operational. The control shall be designed to operate in any ambient temperature from -25°F (-32°C) to +110°F (+43°C) and when specified (see 6.2) shall operate without malfunction in low 5 percent to 80 percent

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

relative humidity atmosphere. When specified (see 6.2), the control shall meet the shock requirements for class II subsidiary components of grade A equipment items as specified in MIL-S-901.

3.7 Safety. The control shall meet the safety requirements of MIL-STD-454, Requirement 1.

3.8 Control operation. Within 3.0 seconds after the correct code (sequence of four numbers) is entered at the switch panel, the control shall activate the door lock release for a preset length of time. The control design shall allow user selection of entry codes by selection of four numbers out of a possible 10 numbers resulting in more than 5,000 different code combinations. The lock release timer shall be adjustable from 3.0 to 30.0 seconds in steps of not greater than 5.0 seconds. The control shall be designed to ignore input signals between the switch panel and the control box for a preset error delay penalty period, when an incorrect or out-of-sequence number is entered. The error delay penalty timer shall be continuously adjustable from 10.0 to 60.0 seconds in steps at not greater than 5.0 seconds. The control shall be designed to prevent acoustic or inductive reading and decoding of the coded entry operations. The control shall operate with a power input of 115V, 50 or 60 Hz, single phase or 220V, 50 Hz, single phase as specified (see 6.2). Upon loss of normal input power, the control shall automatically switch over to the 24 Vdc standby power system and continue to operate normally for a period of not less than 8 hours. The control shall include a code bypass capability (see 3.12), and when specified (see 6.2), it shall include an annunciator and buzzer system or an alarm and alarm bypass system (see 3.15) or both. The control shall be designed to protect internal components against damage from electrostatic discharge entering through the switch panel, enclosures or wires.

3.9 Switch panel. The switch panels (types I and II) shall allow input of the entry code to the control by manual selection of digits numbered 0 through 9. The panel shall be configured so that input of the code is shielded from overt observation by unauthorized personnel. The panel shall be designed so that it can be removed only from within the secured area. All necessary hardware for mounting the switch panel on a wall adjacent to the secured area shall be included.

3.9.1 Weather resistant switch panel assembly. When type I controls are specified (see 6.2), the switch panel shall be designed to operate as specified herein when installed in locations which are not protected from the weather. The assembly shall be designed, and fabricated to meet the test requirements of NEMA standard publications ICS 6 and ICS 250 for type 3, 3R, 3S, 4, or 4X enclosures.

3.10 Control box. The control box shall contain solid-state circuitry. The electrical output of the control box shall be variable and manually or automatically selectible to power 3, 6, 12, or 24 Vdc electric door strikes without damage to the strike. The control box shall deliver not less than 450.0 milliamperes continuously into a 2.0 $\pm$ 0.1 ohms resistive load during

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:39Z
Check the source to verify that this is the current version before use.

the latch open time period. Provisions shall be made for installation of the control box on a wall within the secured area. The external wiring connections, and adjustment controls shall be contained in a compartment behind a door which has provision for locking with a shackle-type padlock. Removal of the control box from the wall shall not be required for access to this compartment. The control box case shall be made of stamped steel or cast metal.

3.11 Cables. Cables and connectors shall be approved for the purpose intended by a nationally recognized testing agency such as Underwriters Laboratories, Incorporated, indicating conformance to all applicable requirements of the agency. Conductors for the power input and power output cables shall be not smaller than number 20 American wire gage size. Unless otherwise specified (see 6.2), the control shall be equipped with one 10-foot length of each of the following cables:

a. Power input cable with 2 pole, 3 wire grounding-type plug or molded power supply and cable assembly for connection to a 115V, 50 or 60 Hz, power source.

b. Control cable for connection of the switch panel to the control box.

c. Three-conductor power output cable for connection of the control box to the electric door strike.

3.12 Code bypass. A code bypass shall be provided to allow the operator, within the secured area, to momentarily close the circuit releasing the strike or other door unlocking device. Door-open time shall be limited as specified in 3.10. A pushbutton or foot-type switch shall be provided for actuating the bypass as specified (see 6.2).

3.13 24 Vdc standby power system. A 24 Vdc standby power system with rechargeable cells and an automatic battery charger shall be provided and may be separately housed. The standby power system shall allow the control to operate normally and the latch to be opened for 30.0 seconds at not less than 6 times per hour for not less than 8.0 continuous hours of standby operation. Circuits shall be provided from the standard ac input power that will maintain the standby power system in a fully charged condition and shall provide automatic switching to the standby power system upon failure of the ac input power. No manual adjustments shall be required to the charger or control box upon restoration of the standard ac input power (see 6.2).

3.14 Electric door strikes. Electric door strikes shall be of the electrical-release type and shall be fully compatible with the electrical output characteristics of the electronic control box specified in 3.10. When specified (see 6.2), electric door strikes shall be provided with a monitoring switch. Door strikes shall be reversible for use on left-hinged or right-hinged doors. The electric door strike shall be one of the following styles as specified (see 6.2). Unless otherwise specified, strikes shall conform to BHMA A156.5.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the currentversion before use.

a. Style 1: Mortise-type installation for use with standard mortise-type entrance lock having a latch bolt. Latch bolt cannot be operated outside secured area. A cover (fish) plate shall be provided over the latch bolt mechanism to prevent operation from exterior.

b. Style 2: Mortise-type installation for use with cylindrical (bored) type mortise locks having a latch bolt. Dimensions of the lock front shall conform to SDI-100 for lock strike installation in steel door frames. Latch bolt cannot be operated outside secured area. A cover (fish) plate shall be provided over the latch bolt mechanism to prevent operation from exterior.

c. Style 3: Mortise-type installation for use with deadbolt type latch. Latch bolt cannot be operated outside secured area. A cover (fish) plate shall be provided over the latch bolt mechanism to prevent operation from exterior.

d. Style 4: Rim-type or surface-type installation for use with rim lock having a latch bolt. Latch bolt cannot be operated outside secured area. A cover (fish) plate shall be provided over the latch bolt mechanism to prevent operation from exterior.

3.15 Optional monitoring components. When specified (see 6.2), the control shall be furnished with optional monitoring components. When optional monitoring components are required, the control shall be provided with one of the three following options as specified.

a. Option A: Annunciator and buzzer system for a visitor to request entrance to the secured area. The annunciator button shall be mounted on the switch panel and wired through the control cable to the control box. The buzzer may be mounted separately from the control box and powered by a circuit in the control box.

b. Option B: Alarm and alarm system bypass. The system shall activate an alarm signal if the door to the secured areas is not closed within the normal lock-release period or is forced open. The bypass shall permit exit to be accomplished by operation of a push button without activating the alarm circuit.

c. Option C: Equipped with the annunciator and buzzer system and the alarm and alarm system bypass.

3.16 Electromagnetic interference suppression. When specified (see 6.2), the control shall meet the UMO5 limits for conducted and radiated emissions as specified in MIL-STD-461 for class C3 group I equipment.

3.17 External radio frequency source protection. Radio frequency signals from any source external to the access control system shall not cause unwanted operation of the strike.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

3.18 Fungus resistance. When specified (see 6.2), electrical components and circuit elements, including terminal and circuit connections, shall be coated with varnish conforming to MIL-V-173, except that:

a. Components and elements inherently inert to fungi or in hermetically sealed enclosures need not be coated.

b. Current-carrying contact surfaces, such as relay contact points, shall not be coated.

3.19 Identification plate. An identification plate will be furnished by the contracting officer for each control. The contractor shall stamp all necessary data in the blank spaces of the plate provided for that purpose, and securely affix a plate to each control in a conspicuous place with nonferrous screws, rivets, or bolts not less than 1/8-inch in diameter. The applicable nomenclature contained in the contract item description shall be placed in the top blank.

3.20 Treatment and painting. Unless otherwise specified (see 6.2), the control shall be treated and painted in accordance with the manufacturer's standard practice. All surfaces of the control other than corrosion-resisting steel shall be protected against corrosion and present a neat appearance.

3.21 Workmanship. Workmanship shall be in accordance with MIL-STD-454, Requirement 9. These requirements are applicable to wiring, welding, brazing, plating, riveting, finishes, machine operations, screw assemblies, and freedom of parts from burrs, sharp edges, or any other damage of defect that could make a part (or equipment) unsuitable for the purpose intended.

3.21.1 Soldering. There shall be no cold solder joints, all solder connections shall be free from residual flux and shall conform to the standard U.S. commercial practice for soldering in electronic equipment.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practic to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Component and material inspection. Components and materials shall be inspected in accordance with all the requirements specified herein and in referenced documents.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. Bid sample inspection (see 4.2.1).
b. First article inspection (see 4.2.2).
c. Quality conformance inspection (see 4.2.3).

4.2.1 Bid sample inspection. When required the bid sample consisting of four complete access control units, conforming to the requirements of section 3 shall be subjected to the examination of 4.4 and the tests of 4.5.

4.2.2 First article inspection. The first article inspection shall be performed on two units when a first article is required (see 3.3 and 6.2). When bid sample testing is waived, four samples shall be subjected to a complete first article testing. This inspection shall include the examination of 4.4, the tests of 4.5 and when specified (see 6.2) the packaging inspection of 4.7 (see 6.2). The first article may be either a first production item or a standard production item from the supplier's current inventory provided the item meets the requirements of the specification and is representative of the design, construction, and manufacturing technique applicable to the remaining items to be furnished under the contract.

4.2.3 Quality conformance inspection. The quality conformance inspection shall include the examination of 4.4, the tests of 4.5, and the packaging inspection of 4.8. This inspection shall be performed on the samples selected in accordance with 4.3.

4.3 Sampling. Sampling and inspection procedures shall be in accordance with MIL-STD-105. The unit of product shall be one control. All controls offered for delivery at one time shall be considered a lot for the purpose of inspection. (See 6.5.)

4.4 Examination. Each control shall be examined for compliance with the requirements specified in section 3 of this specification. Any redesign or modification of the contractor's standard product to comply with specified requirements, or any necessary redesign or modification following failure to meet specified requirements shall receive particular attention for adequacy and suitability. This element of inspection shall encompass all visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

examinations and dimensional measurements. Noncompliance with any specified requirements or presence of one or more defects preventing or lessening maximum efficiency shall constitute cause for rejection.

4.5 Tests. Bid samples and first article units shall be subjected to the tests of 4.6 through 4.6.6. Production units shall be subjected to the tests of 4.6.2, 4.6.3, and the tests of 4.6.4 when optional components are provided (see 3.15).

4.6 Test methods.

4.6.1 General. Prior to commencing the tests of 4.6.2, the control unit to be tested shall be stored in both controlled humidity and temperature environments as specified in 3.6.1. The entire series of tests shall be conducted once under high temperature conditions and again under low temperature conditions as specified in 3.6.2. Electric door strikes utilized in testing the control shall conform to the requirements of 3.14. Failure of any part of the tests conducted at these temperatures shall be cause for rejection. Instrumentation shall be utilized to verify the time and electrical characteristics specified in 3.8 and 3.10.

4.6.2 Special. Conduct the following tests in succession with the control attached to the electric door strike.

a. Set up an access code by random selection of four numbers.

b. Adjust the lock-release timing circuit to limit the lock-release time to six randomly selected positions in the range of 3.0 seconds to 30.0 seconds. With the penalty timing circuit adjusted to a penalty delay time of 10.0 seconds, operate the control system not less than five times at each of the lock-release positions to demonstrate satisfactory opening and closing of locking device.

c. Change the code successively to three other combinations and repeat (b) above with each combination. Nonconformance to the applicable requirements of section 3 shall constitute failure of the control.

d. With the penalty delay time adjusted at 10.0 seconds, operate the switch panel not less than 20 times using incorrectly sequenced inputs.

e. Repeat (d) above with the penalty delay time adjusted at 15.0 seconds, 30.0 seconds, 45.0 seconds, and 60.0 seconds. Nonconformance to 3.8 and 3.10 shall constitute failure of the control.

f. Using a 2.0 $\pm$ 0.1 ohms resistive load, operate the control not less than five times to determine that the latch delivers the current as specified in 3.10.

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

g. Using the 24V electric strike, set the lock-release time to 30.0 seconds, remove the standard ac input power and input the access code once every 10.0 mninutes for not less than 8.0 hours. Verify that the electric strike opens after each code entry. Failure of the latch to release after each code entry shall constitute failure of the control.

h. Life cycle test. The key pad switch panel control unit and strike shall be mechanically cycled 100,000 times at the rate of 6 cycles per minute (minimum). This test is to be conducted with the control unit and a heavy duty 24V strike connected as an operating system. Failure of the strike shall not constitute failure of the unit.

i. Humidity test. With the unit set-up and adjusted as in step 4.6.2.b above and subject the unit to the environmental humidity test method 507.1, procedure IV of MIL-STD-810. The ability of the unit to operate without malfunction as required in 4.6.2.b while in the high humidity condition shall constitute meeting the humidity operation requirement.

4.6.3 Shock tests. When specified in the contract (see 6.2), the control shall be subjected to the type B test of MIL-S-901. The control shall operate as intended in section 3 after the test.

4.6.4 Optional components. When optional components are required (see 3.15), each shall be installed and tested at the high and low temperatures specified in 4.6.1. Failure of the optional component or nonconformance to the requirements of 3.15 shall constitute failure of the control.

4.6.5 Electromagnetic interference suppression. When electromagnetic interference suppression is required (see 3.16 and 6.2), the control shall be tested for conducted and radiated emissions as specified herein.

4.6.5.1 Conducted emissions. The control shall be subjected to test method CE03 specified in MIL-STD-462, except that the broadband electromagnetic emissions shall not appear on the power heads in the frequency range of 50 kilohertz (kHz) to 50 megahertz (MHz) in excess of the levels shown on figure 10-1 of MIL-STD-461.

4.6.5.2 Radiated emissions. The control shall be subjected to test method RE02 specified in MIL-STD-462, except that the broadband electromagnetic emissions shall not be radiated in the frequency range of 150 kHz to 400 MHz in excess of the limits shown for curve 2 on figure 10-2 of MIL-STD-461.

4.6.6 External radio frequency source protection. The control shall be attached to a non-conducting fixture that simulates spatial relationships of a typical installation. Subject to the powered and operational control to pulsed and continuous RF fields to demonstrate immunity from false openings

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

caused by radio frequency interference. The radio frequency range shall be varied between 100 to 400 MHz with field strengths not less than 10.0V per meter. False activation of the latch shall constitute failure of the control.

4.7 Inspection of packaging. The sampling and inspection of the preservation, packing, and marking shall be in accordance with the requirements of section 4 of MIL-E-17555.

5. PACKAGING

5.1 Preservation, packing, and marking. Preservation, packing, and marking shall be in accordance with MIL-E-17555, with the level of preservation and level of packaging as specified (see 6.2).

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. Electronic access controls are intended for use in establishing internal exclusion areas within the secure or controlled area during working hours.

6.2 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When bid samples are not required (see 3.3.1).
d. If machine is required to be configured in a specific measurement system (US or SI), state required system.
e. If measuring and indicating devices are required to be graduated in a specific measurement system (US or SI), state required system.
f. When first article is required and number of units required (see 3.3.2).
g. When resistance to high impact and operation in humid climate is required. Specify operating conditions for testing (see 3.6.2 and 4.6.3).
h. When optional components are required and, if required, which optional monitoring components are to be furnished (see 3.8 and 3.15).
i. Power input voltage for the control (see 3.8 and 3.11a).
j. When weather resistant switch panel is to be provided (see 3.9.1).
k. Length of cables, of other than as specified (see 3.11).
l. Type of switch to be provided with code bypass (see 3.12).

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

m. Style of electric door strike required (see 3.14).
n. When monitoring switch is required (see 3.14.).
o. Optional monitoring components required (see 3.15).
p. When electromagnetic interference suppression is required (see 3.16 and 4.6.4).
q. When electrical components shall be varnished (see 3.18).
r. Treatment and painting, if other than specified (see 3.20).
s. When a first article sample and inspection is required, the first article sample is to receive the packaging inspection (see 4.2.2).
t. Level of preservation and level of packing required (see 5.1).

6.3 Data requirements. When this specification is used in an acquisition and data are required to be delivered, the data requirements shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (CDRL), incorporated into the contract. When the provisions of DOD FAR Supplement, Part 27, Sub-Part 27.475-1 (DD Form 1423) are invoked and the DD Form 1423 is not used, the data should be delivered by the contractor in accordance with the contract or purchase order requirements.

6.4 Bid sample and first article. When the bid sample and first article inspection is required, the unit(s) should be a first production or first article sample as specified in 4.2.1 and 4.2.2. The bid sample should consist of 4 units, and first article consist of 2 units. When the bid samples are waived, the first article should consist of 4 units. The contracting officer should include specific instructions in acquisition documents regarding arrangements for examination, test, and approval of the test units. Invitations for bids should provide that the Government reserves the right to waive the requirement for bid samples or samples for first article inspection to those bidders offering a product which has been previously acquired or tested by the Government, and that bidders offering such products, who wish to rely on such production or test, must furnish evidence with the bid that prior Government approval is presently appropriate for the pending contract. The contracting officer should contact the Assistant to the DOD Program Manager for Physical Security, Naval Civil Engineering Laboratory (Code L56), Port Hueneme, CA 93043-5003, regarding testing and disposition of the test samples.

6.5 Sampling procedures.

6.5.1 Sampling for examination: Recommended inspection level is S-4 and Acceptable Quality Level is 1.0 percent defective (see 4.3).

6.5.2 Sampling for tests. Recommended inspection level (RIL) is S-4 and Acceptable Quality Level (AQL) is 1.0 percent defective (see 4.3).

6.6 Provisioning. The contracting officer should include provisioning requirements for repair parts and maintenance tools as necessary (including any special tools), and instructions regarding shipment of controls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

6.7 Installation instructions. The contracting officer should insure each control includes installation instructions that are normally provided with commercial equipment. These instructions should include the manufacturer's suggested installation procedures and the manufacturer's operating instructions for procured components.

6.8 Subject term (keyword) listing.

Electronic device
Switch panel

6.9 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Custodians:
Army - ME
Navy - YD
Air Force - 99

Review Activities:
Army - IMA
Air Force - HQ AFOSP
DLA - GS

User Activity:
Navy - MC, SH

Preparing Activity:
Navy - YD

(Project 6350-0108)

Source: https://assist.dla.mil -- Downloaded: 202610-22T21:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

Commanding Officer (Code 156)
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commanding Officer
Code 156
Naval Construction Battalion Center
Port Hueneme, CA 93043-5000

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T21:39Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-52913A	

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426

PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202640-22T21:39Z
Check the source to verify that this is the current version before use.