
MILITARY SPECIFICATION SHEET


CONNECTOR ACCESSORIES, ELECTRICAL, BACKSHELL, CABLE SEALING, STRAIGHT, STEP-DOWN, CATEGORY 1A (FOR MIL-C-22992 CONNECTORS, CLASSES C, J, AND R)


This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the accessories described herein shall consist of this specification and the latest issue of MIL-C-85049.

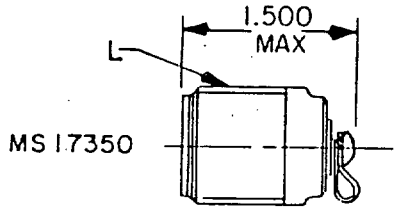


VIEW SHOWING PLUG CAP
TYPE A

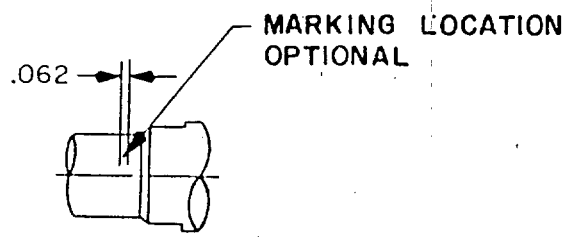

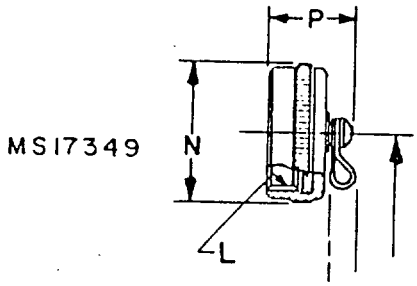

VIEW SHOWING RECEPTACLE CAP
TYPE B

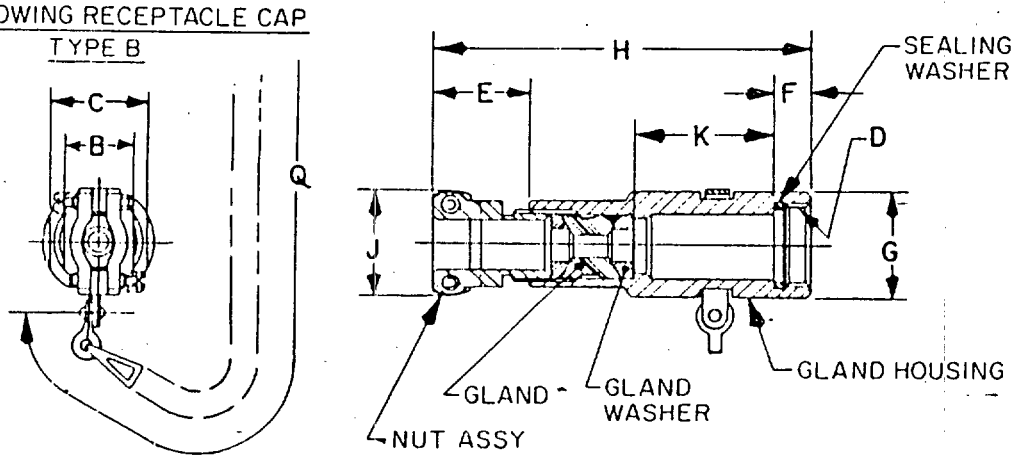

Configuration A. Style 1 cable sealing.

FIGURE 1. Configurations and dimensions.

Ⓐ denotes changes

AMSC N/A
FSC 5935

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.
Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	+.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
1	12	.250	.156	.625	.812	.7500-20 UNEF	.906	.479	.938	3.182	0.938	.563	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	18	.375	.281	.750	1.125	1.1250-18 NEF	.969	.479	1.312	3.901	1.062	1.157	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
3	18	.375	.281	.875	1.125	1.1250-18 NEF	.969	.479	1.312	3.932	1.125	1.125	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
4	18	.281	.188	.750	1.125	1.1250-18 NEF	.969	.479	1.312	3.901	1.062	1.157	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
5	18	.605	.511	1.000	1.125	1.1250-18 NEF	1.062	.479	1.312	4.177	1.375	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
6	18	.530	.436	1.000	1.125	1.1250-18 NEF	1.062	.479	1.312	4.177	1.375	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
7	20	.699	.605	1.062	1.250	1.2500-18 NEF	1.062	.479	1.438	4.489	1.562	1.371	1.2500-0.1P-0.2L-DS	1.562	.980	5.00
8	20	.455	.361	1.062	1.250	1.2500-18 NEF	1.062	.479	1.438	4.489	1.562	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
9	20	.605	.511	1.000	1.250	1.2500-18 NEF	1.062	.479	1.438	4.306	1.375	1.250	1.2500-0.1P-0.2L-DS	1.562	.980	5.00
10	22	.562	.449	1.188	1.406	1.3750-18 NEF	1.094	.479	1.562	4.584	1.688	1.343	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
11	22	.405	.311	1.000	1.375	1.3750-18 NEF	1.062	.479	1.562	4.306	1.375	1.250	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
12	22	.828	.715	1.188	1.406	1.3750-18 NEF	1.094	.479	1.562	4.306	1.375	1.250	1.5000-0.1P-0.2L-DS	1.688	.980	6.00

Configuration 1A. Style 1 cable sealing - Continued.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	+.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
25	28	.530	.436	1.000	1.812	1.8750-16 UN	1.062	.479	2.062	4.431	1.375	1.375	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
26	28	.680	.567	1.312	1.875	1.8750-16 UN	1.094	.479	2.062	4.647	1.812	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
27	32	1.055	.930	1.546	2.062	2.0625-16 N	1.281	.479	2.312	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
28	32	1.230	1.150	1.780	2.062	2.0625-16 N	1.281	.479	2.312	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
29	32	.750	.637	1.312	2.062	2.0625-16 N	1.094	.479	2.312	4.647	1.812	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
30	32	.880	.755	1.546	2.062	2.0625-16 N	1.281	.479	2.312	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
31	32	1.109	.984	1.546	2.062	2.0625-16 N	1.281	.479	2.312	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
32	32	.970	.857	1.312	2.062	2.0625-16 N	1.094	.479	2.312	4.647	1.812	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
33	32	.375	.281	.875	2.062	2.0625-16 N	.969	.479	2.312	4.276	1.125	1.469	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
34	32	.530	.436	1.000	2.000	2.0625-16 N	1.062	.479	2.312	4.431	1.375	1.375	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
35	32	1.130	1.005	1.780	2.062	2.0625-16 N	1.281	.479	2.312	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
36	36	1.310	1.185	1.780	2.312	2.3125-16 N	1.281	.479	2.562	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.719	.980	6.00

Configuration 1A. Style 1 cable sealing - Continued.

FIGURE 1. Configuration and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

	Size number	Shell size	Cable range Max dia	Cable range Min dia	B +.000 -.010	C +.000 -.010	D Thread Class 2B-LH	E Free length max	F +.016	G Dia +.010 -.020	H Max	J +.031	K +.015 -.025	L Thread (plated) Class 2 (A or B)	N Dia max	P Max	Q Within one link
	37	36	1.109	.984	1.546	2.312	2.3125-16 N	1.281	.479	2.562	4.896	2.125	1.371	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
	38	36	1.375	1.250	2.000	2.312	2.3125-16 N	1.281	.479	2.562	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
	39	36	1.180	1.055	1.780	2.312	2.3125-16 N	1.281	.479	2.562	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
	40	36	1.445	1.320	2.000	2.312	2.3125-16 N	1.281	.479	2.562	5.021	2.625	1.371	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
	41	36	.970	.857	1.312	2.250	2.3125-16 N	1.094	.479	2.562	4.651	1.812	1.375	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
	42	36	1.230	1.105	1.780	2.312	2.3125-16 N	1.281	.479	2.562	4.959	2.469	1.372	2.2500-0.1P-0.2L-DS	2.719	.980	6.00
	43	40	1.940	1.815	2.438	2.750	2.6250-16 UN	1.391	.667	2.875	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
	44	40	1.825	1.700	2.438	2.750	2.6250-16 UN	1.391	.667	2.875	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
	45	40	1.730	1.605	2.438	2.750	2.6250-16 UN	1.391	.667	2.875	6.354	3.171	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
	46	40	1.656	1.531	2.250	2.750	2.6250-16 UN	1.281	.667	2.875	6.057	2.953	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
(A)	47	44	2.000	1.867	2.750	2.969	2.8750-16 UN	1.382	.667	3.125	6.345	3.375	2.156	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
(A)	48	44	1.900	1.775	2.438	2.812	2.8750-16 UN	1.382	.667	3.125	5.266	3.171	1.078	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

Configuration 1A. Style 1 cable sealing - Continued.

FIGURE 1. Configuration and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

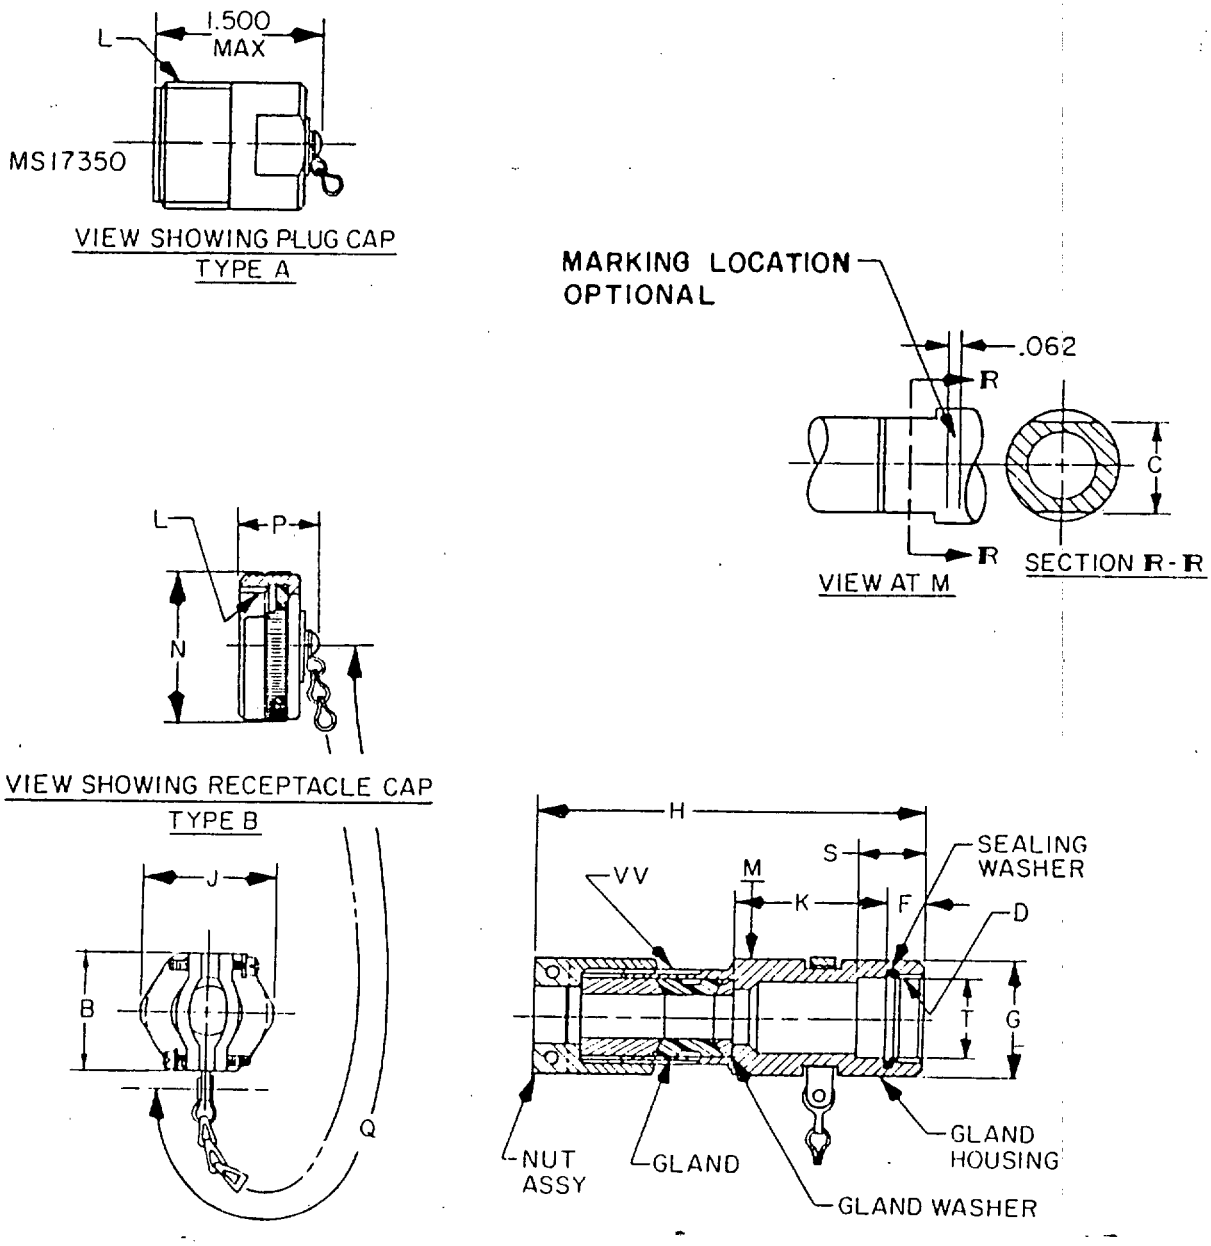

Configuration 1B. Style 2 cable sealing.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range Max	Cable range Min	B +.005	C +.000 -.010	D Thread Class 2B-LH	F +.016	G Dia +.010 -.020	H Max
1	12	.280	.130	.969	.812	.7500-20 UNEF	.479	.938	4.000
2	14	.396	.246	1.094	.938	.8750-20 UNEF	.479	1.062	4.100
3	16	.521	.321	1.219	1.062	1.0000-20 UNEF	.479	1.188	4.400
4	18	.646	.446	1.344	1.125	1.1250-18 UNEF	.479	1.312	4.600
5	18	.475	.300	1.344	1.125	1.0000-20 UNEF	.479	1.312	4.600
6	20	.765	.565	1.469	1.250	1.3750-18 UNEF	.479	1.438	4.900
7	20	.600	.400	1.469	1.250	1.6250-18 NEF	.479	1.438	4.900
8	22	.890	.690	1.625	1.375	1.6250-18 NEF	.479	1.562	4.900
9	22	.700	.500	1.625	1.375	1.6250-18 NEF	.479	1.562	4.900
10	22	.525	.400	1.625	1.375	1.3750-18 NEF	.479	1.562	4.900
11	24	1.015	.815	1.750	1.625	1.6250-18 NEF	.479	1.812	5.000
12	24	.815	.595	1.750	1.625	1.6250-18 NEF	.479	1.812	5.000
13	28	1.180	.980	2.000	1.875	1.6250-18 NEF	.479	2.062	5.300
14	28	.980	.780	2.000	1.875	1.6250-18 UN	.479	2.062	5.300
15	32	1.430	1.230	2.250	2.062	2.0625-16 N	.479	2.062	5.600
16	32	1.230	1.030	2.250	2.062	2.0625-16 N	.479	2.062	5.600
17	36	1.670	1.470	2.500	2.312	2.3125-16 N	.479	2.562	5.600
18	36	1.470	1.270	2.500	2.312	2.3125-16 N	.479	2.562	5.600
19	40	1.860	1.660	2.750	2.562	2.6250-16 UN	.667	2.875	5.725
20	40	1.660	1.400	2.750	2.562	2.6250-16 UN	.667	2.875	5.725

Configuration 1B. Style 2 cable sealing.

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size no.	Shell size	J max	K ±.010	L Thread class 2A/B	N Dia. max.	P max.	Q within one link	S ±.010	T dia ±.005	VV Gland threads plated Class 2-LH
1	12	1.000	.950	.8750-0.1P-0.2L-DS	1.094	.765	5.00	1.425	.600	.8125-20 UNEF
2	14	1.110	1.075	1.0000-0.1P-0.2L-DS	1.219	.765	5.00	1.425	.726	.9375-20 UNEF
3	16	1.320	1.200	1.1250-0.1P-0.2L-DS	1.344	.980	5.00	1.605	.845	1.0625-18 NEF
4	18	1.420	1.325	1.1250-0.1P-0.2L-DS	1.469	.980	5.00	1.605	.970	1.1875-18 NEF
5	18	1.420	1.325	1.1250-0.1P-0.2L-DS	1.469	.980	5.00	1.605	.970	1.1875-18 NEF
6	20	1.600	1.325	1.3750-0.1P-0.2L-DS	1.562	.980	5.00	1.605	1.095	1.3125-18 NEF
7	20	1.600	1.325	1.3750-0.1P-0.2L-DS	1.562	.980	5.00	1.605	1.095	1.3125-18 NEF
8	22	1.750	1.325	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.4375-18 NEF
9	22	1.750	1.325	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.4375-18 NEF
10	22	1.750	1.325	1.5000-0.1P-0.2L-DS	1.688	.980	6.00	1.605	1.220	1.4375-18 NEF
11	24	1.900	1.450	1.5000-0.1P-0.2L-DS	1.938	.980	6.00	1.605	1.470	1.5625-18 NEF
12	24	1.900	1.450	1.5000-0.1P-0.2L-DS	1.938	.980	6.00	1.605	1.470	1.5625-18 NEF
13	28	2.190	1.700	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	1.8125-16 N
14	28	2.190	1.700	2.0000-0.1P-0.2L-DS	2.219	.980	6.00	1.605	1.713	1.8125-16 N
15	32	2.475	1.950	2.2500-0.1P-0.2L-DS	2.469	.980	6.00	1.605	1.900	2.0625-16 N
16	32	2.475	1.950	2.2500-0.1P-0.2L-DS	2.469	.980	6.00	1.605	1.900	2.0625-16 N
17	36	2.715	1.950	2.2500-0.1P-0.2L-DS	2.719	.980	6.00	1.605	2.150	2.3125-16 N
18	36	2.715	1.950	2.2500-0.1P-0.2L-DS	2.719	.980	6.00	1.605	2.150	2.3125-16 N
19	40	2.900	1.950	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.5000-16 UN
20	40	2.900	1.950	2.7500-0.1P-0.2L-DS	2.969	.980	6.00	1.605	2.460	2.5000-16 UN


Configuration 1B. Style 2 cable sealing.

FIGURE 1. Configurations and dimensions - Continued.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

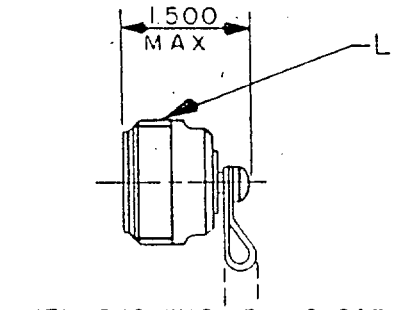


VIEW SHOWING PLUG CAP
MS17350
TYPE A




MARKING LOCATION
OPTIONAL

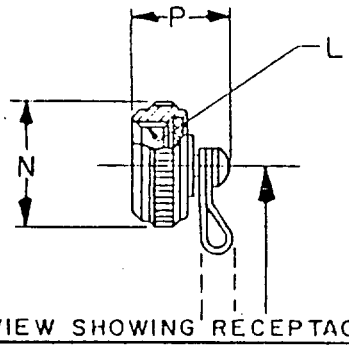

VIEW SHOWING RECEPTACLE CAP
MS17349
TYPE B

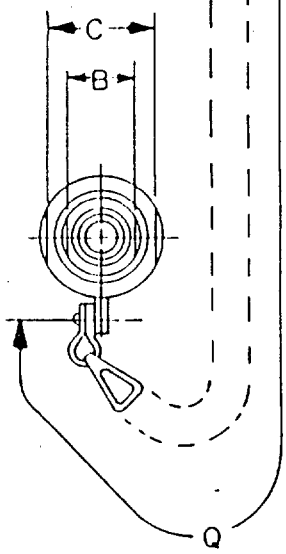

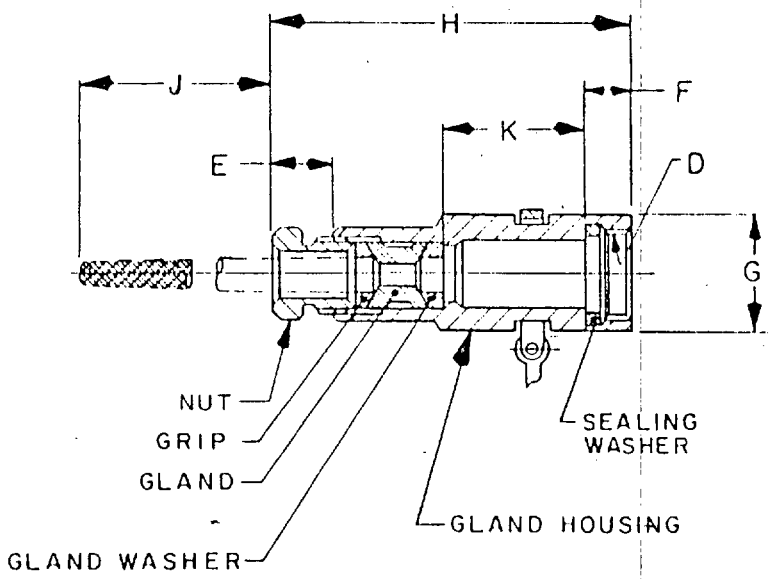

Configuration 1C. Style 3 cable sealing and gripping.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
1	12	.222	.160	.625	.812	.7500-20 UNEF	.476	.479	.938	2.752	2.406	.563	.8750-0.1P-0.2L-DS	1.094	.765	5.00
2	18	.605	.511	1.000	1.125	1.1250-18 UNEF	.597	.479	1.312	3.712	5.188	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
3	18	.530	.436	1.000	1.125	1.1250-18 UNEF	.597	.479	1.312	3.712	4.688	1.121	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
4	18	.375	.306	.875	1.125	1.1250-18 UNEF	.539	.479	1.312	3.502	3.844	1.125	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
5	18	.281	.219	.750	1.125	1.1250-18 UNEF	.539	.479	1.312	3.471	2.844	1.157	1.2500-0.1P-0.2L-DS	1.469	.980	5.00
6	20	.699	.605	1.062	1.250	1.2500-18 UNEF	.597	.479	1.438	4.024	6.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
7	20	.605	.511	1.000	1.250	1.2500-18 UNEF	.597	.479	1.438	3.841	5.188	1.250	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
8	20	.455	.361	1.062	1.250	1.2500-18 UNEF	.597	.479	1.438	4.024	4.188	1.371	1.3750-0.1P-0.2L-DS	1.562	.980	5.00
9	22	.828	.715	1.125	1.460	1.3750-18 UNEF	.597	.479	1.562	4.087	6.688	1.343	1.5000-0.1P-0.2L-DS	1.688	.980	5.00
10	22	.562	.449	1.125	1.460	1.3750-18 UNEF	.597	.479	1.562	4.087	5.188	1.343	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
11	22	.405	.316	1.000	1.375	1.3750-18 UNEF	.597	.479	1.562	3.841	3.688	1.250	1.5000-0.1P-0.2L-DS	1.688	.980	6.00
12	24	.805	.692	1.250	1.625	1.6250-18 UNEF	.597	.479	1.812	4.150	6.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00

Configuration 1C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil - Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
13	24	.750	.637	1.250	1.625	1.6250-18 UNEF	.597	.479	1.812	4.150	6.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
14	24	.630	.517	1.250	1.625	1.6250-18 UNEF	.597	.479	1.812	4.150	5.688	1.371	1.7500-0.1P-0.2L-DS	1.938	.980	6.00
15	28	1.109	.984	1.500	1.875	1.8750-16 UN	.597	.479	2.062	4.212	7.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
16	28	1.000	.875	1.500	1.875	1.8750-16 UN	.597	.479	2.062	4.212	7.188	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
17	28	.880	.755	1.500	1.875	1.8750-16 UN	.597	.479	2.062	4.212	6.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
18	28	.750	.637	1.250	1.875	1.8750-16 UN	.597	.479	2.062	4.150	6.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
19	28	.680	.567	1.250	1.875	1.8750-16 UN	.597	.479	2.062	4.150	6.688	1.371	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
20	28	.530	.436	1.000	1.812	1.8750-16 UN	.597	.479	2.062	3.966	4.688	1.375	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
21	28	.375	.306	.875	1.875	1.8750-16 UN	.539	.479	2.062	3.799	3.844	1.422	2.0000-0.1P-0.2L-DS	2.219	.980	6.00
22	32	1.230	1.105	1.750	2.062	2.0625-16 UN	.597	.479	2.312	4.275	8.188	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
23	32	1.130	1.005	1.750	2.062	2.0625-16 UN	.597	.479	2.312	4.275	7.188	1.372	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
24	32	1.055	.930	1.500	2.062	2.0625-16 UN	.597	.479	2.312	4.212	7.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00

Configuration 1C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
25	32	.970	.857	1.250	2.062	2.0625-16 UN	.597	.479	2.312	4.150	7.188	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
26	32	.880	.755	1.500	2.062	2.0625-16 UN	.597	.479	2.312	4.212	6.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
27	32	.750	.637	1.250	2.062	2.0625-16 UN	.597	.479	2.312	4.150	6.688	1.371	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
28	32	.530	.436	1.000	2.000	2.0625-16 UN	.597	.479	2.312	3.966	4.688	1.375	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
29	32	.375	.306	.875	2.062	2.0625-16 UN	.539	.479	2.312	3.846	3.844	1.469	2.2500-0.1P-0.2L-DS	2.469	.980	6.00
30	36	1.445	1.320	2.000	2.312	2.3125-16 UN	.597	.479	2.562	4.337	9.688	1.371	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
31	36	1.375	1.250	2.000	2.312	2.3125-16 UN	.597	.479	2.562	4.337	9.688	1.371	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
32	36	1.310	1.185	1.750	2.312	2.3125-16 UN	.597	.479	2.562	4.275	8.688	1.372	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
33	36	1.230	1.105	1.750	2.312	2.3125-16 UN	.597	.479	2.562	4.275	8.188	1.372	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
34	36	1.180	1.055	1.750	2.312	2.3125-16 UN	.597	.479	2.562	4.275	8.188	1.372	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
35	36	1.109	.984	1.500	2.312	2.3125-16 UN	.597	.479	2.562	4.212	7.688	1.371	2.5000-0.1P-0.2L-DS	2.719	.980	6.00

Configuration 1C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Size number	Shell size	Cable range		B	C	D	E	F	G	H	J	K	L	N	P	Q
		Max dia	Min dia	+.000 -.010	+.000 -.010	Thread Class 2B-LH	Free length max	+.016	Dia +.010 -.020	Max	±.031	+.015 -.025	Thread (plated) Class 2 (A or B)	Dia max	Max	Within one link
36	36	.970	.857	1.250	2.250	2.3125-16 UN	.597	.479	2.562	4.154	7.188	1.375	2.5000-0.1P-0.2L-DS	2.719	.980	6.00
37	40	1.940	1.815	2.438	2.750	2.6250-16 UN	.710	.667	2.875	5.673	13.188	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
38	40	1.825	1.700	2.438	2.750	2.6250-16 UN	.710	.667	2.875	5.673	13.188	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
39	40	1.730	1.605	2.438	2.750	2.6250-16 UN	.710	.667	2.875	5.673	13.188	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
40	40	1.656	1.531	2.250	2.750	2.6250-16 UN	.597	.667	2.875	5.373	12.688	2.156	2.7500-0.1P-0.2L-DS	2.969	.980	6.00
(A) 41	44	2.000	1.867	2.750	2.969	2.8750-16 UN	.710	.667	3.125	5.673	14.188	2.156	3.0000-0.1P-0.2L-DS	3.217	.980	6.00
(A) 42	44	1.900	1.775	2.438	2.812	2.8750-16 UN	.710	.667	3.125	4.594	13.688	1.078	3.0000-0.1P-0.2L-DS	3.217	.980	6.00

Configuration 1C. Style 3 cable sealing and gripping - Continued.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.692	17.58	1.200	30.48	1.860	47.24
.010	0.25	.699	17.75	1.219	30.96	1.867	47.42
.015	0.38	.700	17.78	1.220	30.99	1.875	47.62
.016	0.41	.710	18.03	1.230	31.24	1.8750	47.625
.020	0.51	.715	18.16	1.250	31.75	1.900	48.26
.025	0.64	.726	18.44	1.2500	31.750	1.938	49.22
.062	1.57	.750	19.05	1.270	32.26	1.940	49.28
.1	2.54	.7500	19.050	1.281	32.54	1.950	49.53
.130	3.30	.755	19.18	1.301	33.04	2.000	50.80
.156	3.96	.765	19.43	1.310	33.27	2.0000	50.800
.160	4.06	.780	19.81	1.312	33.32	2.062	52.37
.188	4.78	.787	19.99	1.3125	33.338	2.0625	52.39
.2	5.08	.805	20.45	1.320	33.53	2.125	53.98
.219	5.56	.812	20.63	1.325	33.66	2.150	54.61
.222	5.64	.8125	20.638	1.343	34.11	2.156	54.76
.246	6.25	.815	20.70	1.344	34.14	2.190	55.63
.250	6.35	.828	21.03	1.371	34.82	2.219	56.36
.280	7.11	.845	21.46	1.372	34.85	2.250	56.15
.281	7.14	.857	21.77	1.375	34.92	2.2500	57.150
.300	7.62	.875	22.23	1.3750	34.925	2.312	58.72
.306	7.77	.8750	22.225	1.382	35.10	2.3125	58.74
.316	8.03	.880	22.35	1.391	35.33	2.406	61.11
.321	8.15	.890	22.61	1.400	35.56	2.438	61.92
.361	9.17	.900	22.86	1.406	36.07	2.460	62.48
.375	9.53	.906	23.01	1.420	36.07	2.469	62.71
.396	10.06	.930	23.62	1.422	36.19	2.475	62.86
.400	10.16	.9375	23.81	1.425	36.20	2.500	63.50
.405	10.29	.938	23.83	1.430	36.32	2.5000	63.500
.436	11.07	.950	24.13	1.4375	36.51	2.562	65.07
.445	11.30	.969	24.61	1.438	36.52	2.625	66.68
.446	11.33	.970	24.64	1.445	36.70	2.6250	66.675
.449	11.40	.980	24.89	1.450	36.83	2.715	68.96
.455	11.56	.984	24.99	1.469	37.31	2.719	69.06
.475	12.07	1.000	25.40	1.470	37.34	2.750	69.85
.476	12.09	1.0000	25.400	1.500	38.10	2.7500	69.850
.479	12.17	1.005	25.65	1.5000	38.100	2.752	69.90
.500	12.70	1.015	25.78	1.531	38.89	2.812	71.42
.511	12.98	1.030	26.16	1.546	39.27	2.844	72.24
.517	13.13	1.055	26.88	1.562	39.67	2.875	73.02
.521	13.23	1.062	26.97	1.5625	39.688	2.8750	73.025
.525	13.34	1.0625	26.988	1.600	40.64	2.900	73.66
.530	13.46	1.075	27.31	1.605	40.77	2.953	75.01
.536	13.61	1.078	27.38	1.625	41.28	2.969	75.41
.539	13.69	1.094	27.79	1.6250	41.275	3.0000	76.20
.562	14.27	1.095	27.81	1.656	42.06	3.125	79.38
.563	14.30	1.105	28.07	1.660	42.16	3.171	80.54
.565	14.35	1.109	28.17	1.670	42.42	3.182	80.82
.567	14.40	1.110	28.19	1.688	42.88	3.217	81.71
.595	15.11	1.121	28.47	1.700	43.18	3.471	88.16
.597	15.16	1.125	28.58	1.713	43.51	3.502	88.95
.600	15.24	1.1250	28.575	1.730	43.94	3.688	93.68
.605	15.38	1.130	28.70	1.750	44.45	3.712	94.28
.625	15.88	1.150	29.21	1.7500	44.450	3.799	96.49
.630	16.00	1.157	29.39	1.775	45.08		
.637	16.18	1.180	29.97	1.780	45.21		
.646	16.41	1.181	30.00	1.812	46.02		
.667	16.94	1.185	30.10	1.8125	46.04		
.680	17.27	1.1875	30.117	1.815	46.10		
.690	17.53	1.188	30.17	1.825	46.36		

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. Unless otherwise specified, tolerance is ±.016 (0.41 mm).
4. Dimensions apply after plating.

FIGURE 1. Configurations and dimensions - Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Design and construction:

Dimensions and configuration: See figure 1.

Accessories shall be designated type A and B:

Type A is for use with MS17344.

Type B is for use with MS17343, MS17345, and MS17347.

The backshell, cap and chain is considered the complete accessory to be supplied.


Material and finish: See table I. Connectors and their associated accessories shall be of the same finish.

TABLE I. Material and finish.


Component	Material	Finish
Accessory body and cap	High grade aluminum alloy in accordance with MIL-C-85049	A, W
Chain	Corrosion resistant steel, type II, class 3, trade number 8 of RR-C-271	Passivated
Gasket and gland	Rubber, in accordance with MIL-R-3065	

Part number: See example below:

For styles 1 and 2:

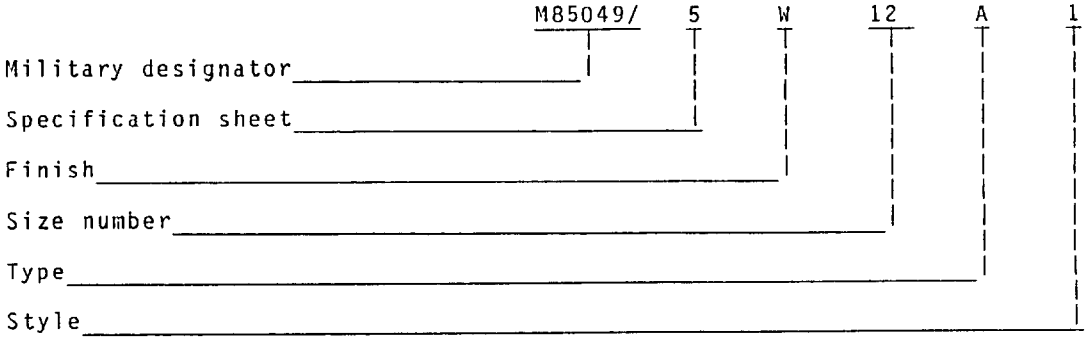

For style 3:

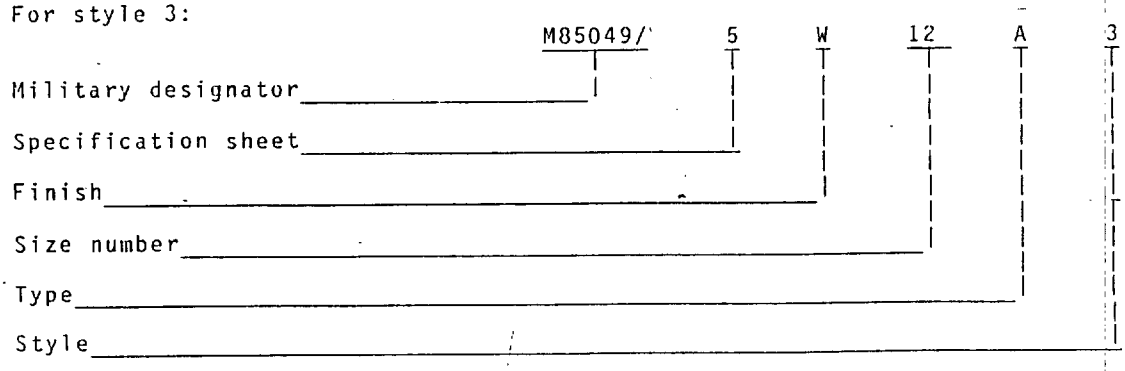

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.

Simplified assembly instructions shall be packaged with each accessory.

Application:

These accessories are for use with connectors specified on MS17343, MS17344, MS17345, and MS17347.

Styles 1 and 3 are for use with classes R and C.


Style 2 for use with classes R, C, and J.

Qualification:

See MIL-C-85049, category 1A.

QPL evaluating activity: Defense Electronics Supply Center, (DESC-E), Dayton, OH 45444.

Supersession data:

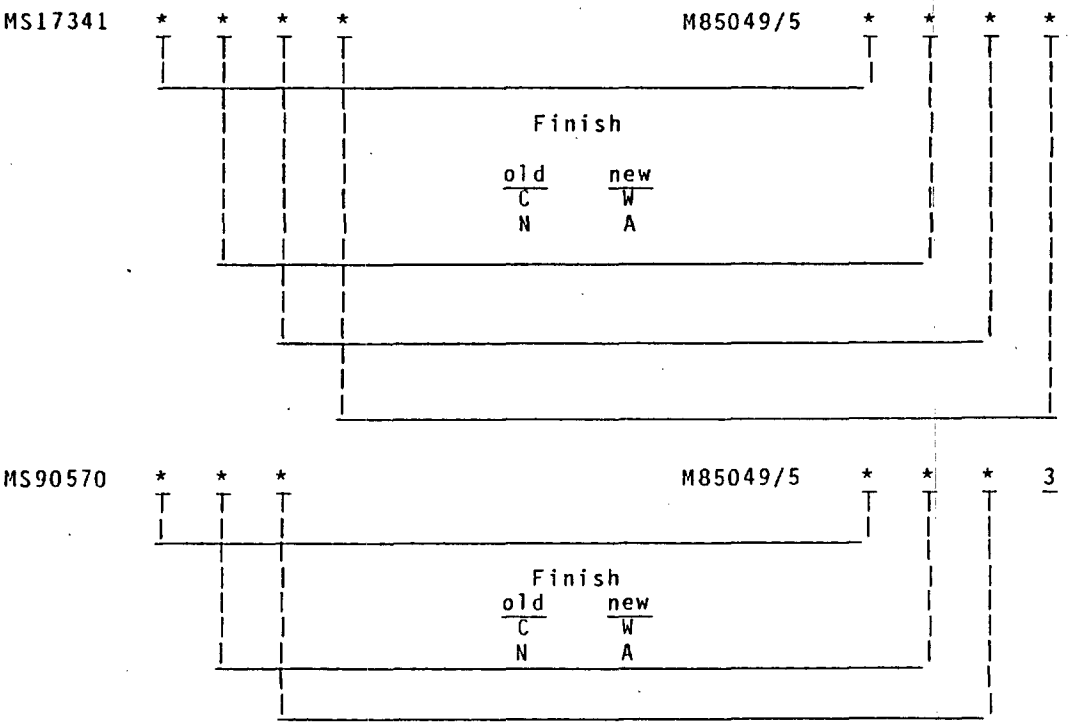

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - AR, MI
(A) Air Force - 11, 99
DLA - ES

(A) Civil agency coordinating activity:
NASA - NA

Preparing activity:
Navy - EC

Agent:
DLA - ES

(Project 5935-3658=03)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T10:10Z
Check the source to verify that this is the current version before use.