MILITARY SPECIFICATION

CARTRIDGE, IMPULSE: M796

This specification is approved for use by the US Army Armament, Munitions and Chemical Command, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers the parts for, loading assembling and packing for one type of electrically initiated cartridge, designated as Cartridge, Impulse: M796.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. The following documents of the issue in effect on date of invitation for bids or request for proposals, form a part of this specification to the extent specified herein.

SPECIFICATIONS

MILITARY

MIL-A-48078	-	Ammunition, Standard Quality Assurance Provisions, General Specification For

STANDARDS

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-810	-	Environmental Test Methods

FSC 1377

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Commander, US Army Armament Research and Development Center, Attn. DRSMC-QA, Dover, New Jersey 07801 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

DRAWINGS (See 6.4)

U.S. ARMY ARMAMENT RESEARCH AND DEVELOPMENT COMMAND

9311660 - Cartridge, Impulse: M796
9313890 - Packing and Marking for Box, Exterior for Impulse Cartridge: M796

U.S. ARMY MATERIEL DEVELOPMENT AND READINESS COMMAND

19-48-4116/115E - Cartridge, Impulse, XM796 on 4-Way Entry Pallets

INSPECTION EQUIPMENT DRAWINGS

9311451 - Payload Module Assembly
9311402 - Countermeasure, Chaff: M1
9311428 - Breech Plate Assembly
9311434 - Dispenser Assembly
9354498 - Inert Flare For The M130 Aircraft General Purpose Dispenser

(Copies of specifications, standards and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the Contracting Officer).

2.1.2 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on the date of invitation for bids or request for proposal shall apply.

CODE OF FEDERAL REGULATIONS

Title 49 - Transportation, Parts 100-199

(The Code of Federal Regulations is available from the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402. Orders should specify, "49 CFR 100-199 (latest revision)").

3. REQUIREMENTS

3.1 Materials. Materials shall be in accordance with the applicable drawings and specifications.

3.2 Assembly. The assembly shall comply with all requirements specified on drawing 9311660 and with all requirements in applicable specifications.

3.3 Bridgewire resistance. The resistance of the bridge circuit of the cartridge (between the contact pin and the case)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

shall be 1.0 ± 0.15 ohms when measured at 75 ± 15 degrees Fahrenheit with maximum test current of 10 milliamperes (ma) direct current (dc).

3.4 No-fire sensitivity. The cartridge shall not fire when subjected to a minimum of 1 ampere dc with a ripple content not to exceed 5 percent. For First Article Inspection, test current shall be applied for 300 seconds minimum. For Quality Conformance Inspection, test current shall be applied for 10 seconds minimum, 15 seconds maximum.

3.5 Environmental requirements. The cartridges shall remain functional after being subjected to the environment tests as specified in 4.5.3.

3.5.1 Transportation vibration

3.5.2 Shock

3.5.3 Humidity

3.5.4 Aircraft vibration

3.5.5 Temperature-Altitude

3.5.6 Water immersion

3.6 All-fire sensitivity. The cartridge shall fire when no more than 4.25 amps dc is applied for a maximum of 15 milliseconds (ms) to the bridge circuit.

3.6.1 Petaling. After functioning the cartridge, the disc shall show visual evidence of petaling (i.e., the torn metal sections of disc shall be folded and/or sections shall be partially or wholly missing. Burn-through without visual petaling is not acceptable.)

3.6.2 Integrity of crimp. After functioning, the cartridge shall exhibit a secure crimp for 360° between the case and closure washer.

3.7 Pressure-time traces. The cartrige shall produce a pressure vs. time output response with the following characteristics when tested in a closed bomb having a net volume of 43.5 ± 1.5 cc with the impulse cartridge in place. Firing current shall be in accordance with paragraph 3.6

a.	Rise Time (ms)	25 maximum
b.	Peak Pressure (psi)	450 minimum 750 maximum
c.	Slope (psi/ms)	150 maximum
d.	Total Function Time (ms)	50 maximum

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

NOTES:

1. Rise time shall be the elapsed time between 10% of peak time and peak pressure.

2. Slope shall be determined by that portion of the pressure-time trace between 10% and 90% of peak pressure.

3. Total Function Time shall be the elapsed time from First Application of Firing Current (zero time) to max peak pressure.

3.8 Evacuation test. After firing, not more than 5% by weight of the chaff shall remain in the cartridge.

3.9 Velocity test. Upon ejection, the inert pellet shall have an initial velocity of 90 to 200 feet per second as measured between four and twelve feet from the test firing fixture.

3.10 First article inspection. This specification contains technical provisions for first article inspection. Requirements for the submission of first article samples by the contractor shall be as specified in the contract.

3.11 Workmanship. All parts and assemblies shall be fabricated and loaded in a thorough workmanlike manner, and all manufacturing, processing, and assembly operations shall be correctly performed. They shall be clean and free of burrs, sharp edges, unblended radii, surface defects, chips, dirt, grease and oil (except where specifically required), corrosion products and other foreign matter. The cleaning method used shall not be injurious to any part or assembly nor shall they be contaminated by the cleaning agent. Exterior surface coatings shall be continuous except for a few light scratches not exposing base material. All required markings and stampings shall be neat and sharply defined. Required packing shall be dry.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for Inspection and Standard Quality Assurance Provisions. Unless otherwise specified herein or in the contract, the provisions of MIL-A-48078 shall apply and are hereby made a part of this detail specification.

4.2 Classification of inspections. The following types of inspection shall be conducted on this item.

a. First Article Inspection
b. Quality Conformance Inspection

4.3 First article inspection.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

4.3.1 Submission. The contractor shall submit a first article sample as designated by the Contracting Officer for evaluation in accordance with provisions of 4.3.2 and 4.3.3. The first article sample shall consist of the following items in sample quantities as indicated in Table 1.

4.3.2 Inspections to be performed. See MIL-A-48078 and Table I specified herein.

4.3.3 Rejection. (See MIL-A-48078).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63108A(AR)

PARAGRAPH	TITLE		SHEET 1 OF 2		DRAWING NUMBER
	Cartridge, Impulse: M796				See below
					NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
	Disc, Closure (Dwg. 9311662) Examination for defects	30		3.2	Gage-Inspect to dwg
	Washer, Closure (Dwg. 9311663) Examination for defects	30		3.2	Gage-Inspect to dwg
	Pin, Contact (Dwg. 9311666) Examination for defects	30		3.2	Gage-Inspect to dwg
	Pin, Contact Assembly (Dwg. 9311668) Examination for defects	30		3.2	Gage-Inspect to dwg
	Eyelet (Dwg. 9311667) Examination for defects	30		3.2	Gage-Inspect to dwg
	Case (Dwg. 9311669) Examination for defects	30		3.2	Gage-Inspect to dwg
	(Examination/Test Cont'd on Page 2)				

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

TABLE I. First article inspection

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63108A(AR)

PARAGRAPH	TITLE			SHEET 2 OF 2		DRAWING NUMBER
	Cartridge, Impulse: M796					See below
						NEXT HIGHER ASSEMBLY
CATEGORY	EXAMINATION OR TEST		NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD

Test/Examination (1) Cartridge, Impulse: M796 (Dwg. 9311660)	No. of Samples Tested	Req. Para.	Ref. Para.	Samples Pulled	Closed Bomb (3.6/3.7) (4.5.4 thru 4.5.5)	Chaff Evacuation (3.8) (4.5.6)	Flare Velocity (3.9) (4.5.7)
Examination for Defects	260 (2)	3.2	4.4.2.1(6)	None			
Bridgewire Resistance	260	3.3	4.5.1	30	10(7)	10(7)	10(7)
Transportation & Vibration (3)	230	3.5.1	4.5.3.2	10	10(7)		
Shock (4)	220	3.5.2	4.5.3.4	10	10(7)		
Humidity (4)	210	3.5.3	4.5.3.1	10	10(7)		
Aircraft Vibration (4)	200	3.5.4	4.5.3.3	10	10(7)		
Temperature-Altitude (4)	190	3.5.5	4.5.3.5	10	10(7)		
No Fire Sensitivity (5)	180	3.4	4.5.2	None			
Water Immersion (5)	180	3.5.6	4.5.3.6	None			
All Fire Sensitivity/Closed Bomb	90	3.6/3.7	4.5.4, 1&2 4.5.5	--	90(8)		
All Fire/Evacuation Test	45	3.8	4.5.4, 1&2 4.5.6			45(7)	
All Fire/Velocity Test	45	3.9	4.5.4, 1&2 4.5.7	--			45(7)

NOTES (1) Perform tests in order indicated.
(2) This sample covers all test units.
(3) Test cartridge bare in hard mount fixture.
(4) To be tested with cartridge in M-1 Countermeasure Chaff (Dwg. 9311402) and Payload Module Assembly (Dwg. 9311451) both G.F.E.
(5) To be tested bare.
(6) Do not examine for defects 105 through 108.
(7) For informational purposes only.
(8) Test samples for First Article Acceptance Inspection.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

4.4 Quality conformance inspection.

4.4.1 Inspection lot formation. Inspection lots shall comply with the lot formation provisions of MIL-A-48078. Each inspection lot of M796 Impulse Cartridge shall contain:

(1) Inert parts from one interfix from one manufacturer.

(2) Composition ingredients and HPC-1 Propellant from not more than one lot from one supplier.

(3) Initiation and booster charge compositions of one or more batches produced under one continuous set of operating conditions, with each batch of composition having been subjected to the physical mixing process intended to make the batch homogenous.

4.4.2 Examination. (See MIL-A-48078).

a. Sampling plans. Unless otherwise specified in the classification of Defects and Test tables, sampling plans and procedures for major and minor defects shall be in accordance with MIL-STD-105, Inspection Level II.

TABLE II

ACCEPTANCE TESTING

Inspection Lot Size	Sample Size	Accept	Reject
0-1,000	30	0	1
1,001-3,000	60	1	2
3,001-10,000	90	2	3
10,001-35,000	120	3	4
35,001-150,000	210	5	6
150,001-500,000	315	7	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63108A(AR)

PARAGRAPH	TITLE		SHEET	DRAWING NUMBER
4.4.2.1	Cartridge, Impulse: M796		1 OF 1	9311660
				NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Overall length		0.40%	3.2	Gage
102	Depth of firing pin below base surface		0.40%	3.2	Gage
103	Barrel diameter (see 9311669)		0.40%	3.2	Gage
104	Base diameter (see 9311669)		0.40%	3.2	Gage
105	Bridgewire resistance test		100%	3.3	4.5.1
106	No-fire sensitivity test		(a)	3.4	4.5.2
107	Water immersion		(b)	3.5.6	4.5.3.6
108	All-fire sensitivity test/Closed Bomb Test		(b)	3.6/3.7	4.5.4/4.5.5
109	Petaling (Disc)		(b)	3.6.1	4.5.4.1
110	Integrity of crimp		(b)	3.6.2	4.5.4.2
Minor					
201	Sealant missing or inadequate		0.65%	3.2	Visual
202	Marking incorrect, illegible or missing		0.65%	3.2	Visual
203	Evidence of poor workmanship		1.00%	3.11	Visual

NOTES:
a. Select sample in accordance with Table 2.
b. Use sample from previous test.

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63108A(AR)

PARAGRAPH	TITLE	SHEET	DRAWING NUMBER
4.4.2.2	Packing and Marking for Can, Metal for Impulse Cartridge: M796	1 OF 1	9313881
			NEXT HIGHER ASSEMBLY 9313890

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any packaging component missing		0.40%	5.1	Visual
102	Incorrect number of impulse cartridges		0.40%	5.1	Visual
103	Marking missing, incomplete or illegible		0.40%	5.1	Visual
104	Can incorrectly sealed		0.40%	5.1	Visual
Minor					
201	Evidence of poor workmanship		1.00%	3.11	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

QUALITY CONFORMANCE INSPECTION

CLASSIFICATION OF DEFECTS & TESTS

MIL-C-63108A(AR)

PARAGRAPH	TITLE	SHEET 1 OF 1	DRAWING NUMBER
4.4.2.3	Packing and Marking for Box, Exterior for Impulse Cartridge: M796		9312890
			NEXT HIGHER ASSEMBLY

CATEGORY	EXAMINATION OR TEST	NO. OF SAMPLE UNITS	AQL OR 100%	REQUIREMENT PARAGRAPH	PARAGRAPH REFERENCE /INSPECTION METHOD
Critical	None defined				
Major					
101	Any packing component missing		0.40%	5.2	Visual
102	Number of metal cans incorrect		0.40%	5.2	Visual
103	Exterior marking missing, incomplete or illegible		0.40%	5.2	Visual
Minor					
201	Contents not packed tightly		0.65%	5.2	Visual
202	Evidence of poor workmanship		1.00%	3.11	Visual

NOTES:

DRDAR-QA Form 160 Jul 77

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

4.4.3 Testing. Testing is described in the First Article and Quality Conformance Inspection tables.

4.4.4 Inspection equipment. The inspection equipment required to perform the inspections and tests prescribed in this specification are identified in the "Paragraph Reference/Inspection Method" column in the tables starting with paragraph 4.4.2.1 and in the test method paragraphs (see 4.5). The contractor shall submit for approval, inspection equipment designs in accordance with the terms of the contract. See section 6 of MIL-A-48078, and 6.3 herein.

4.5 Test methods and procedures.

4.5.1 Bridge circuit resistance test. Using approved test equipment, the cartridges shall be tested for conformance to paragraph 3.3. If any cartridge fails to meet the requirements, it shall be classed defective. (Non-destructive test)

4.5.2 No-fire sensitivity test. Using approved test equipment, the cartridges shall be tested for conformance to paragraph 3.4. If any cartridge fails to meet the requirements, it shall be classed defective. (Non-destructive test)

4.5.3 Environmental tests. (First Article only) Approved test equipment shall be used throughout. Following each of the environmental conditions, the cartridges shall be examined for the visual defects in paragraph 4.4.2.1. Any defect shall be cause for rejection of the First Article Sample.

4.5.3.1 Humidity. The test shall be performed in accordance with MIL-STD-810, Test Method 507.1, Procedure I. (10 days) The cartridge shall be tested assembled to the Countermeasure Chaff: M-1 (Dwg. 9311402) and Payload Module Assembly (Dwg. 9311451) both to be G.F.E.

4.5.3.2 Transportation vibration. This test shall be performed in accordance with MIL-STD-810, Method 514.2, Procedure X, using curve AW.

4.5.3.3 Aircraft vibration. The cartridge shall be vibrated assembled to the Countermeasure Chaff: M-1 (dwg. 9311402) and Payload Module Assembly (Dwg. 9311451) both to be G.F.E. This test shall be performed in accordance with MIL-STD-810, Method 514.2, procedure IIC and procedure IA/category b.2, employing the following supplementary data:

a. Table 514.2-IIA Figure 514.2-2A--"W_o" shall be $0.2G^2/Hz$.

b. Figure 514.2-2A--Random vibration envelope, the frequency "VAR" shall be 89.5 Hz., and the acceleration power spectral density at the 2000 Hz. cutoff point shall be $.05G^2/Hz$.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.


c. Table 514.2-IVA--The number of missions shall be 101.

d. Figure 514.2-4C--The number of missions shall be 100.

e. Figures 514.2-4D, 514.2-4E and 514.2-4F--The weight used for the test item shall be 50 pounds.

4.5.3.3.1 Vibration - Axis Orientation

a. Payload Module/Item Assembly Test Axis Orientation should be as follows:

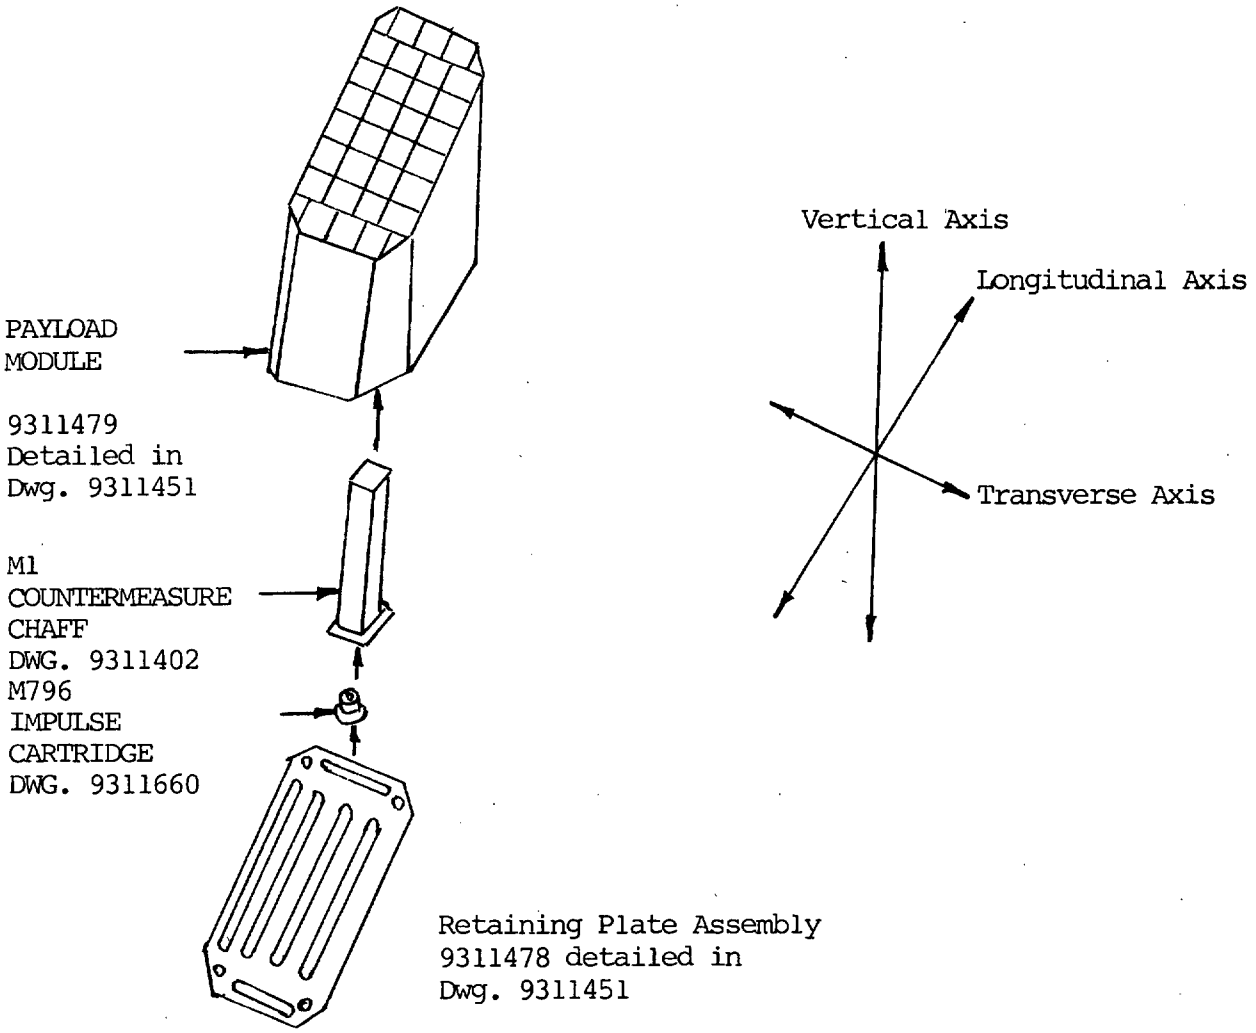

b. Orientation/Mounting of Payload Module Assembly to the vibration table for each of the three axis should be such that the open end of the Payload Module Assembly is at the top with the Chaff Cartridge in place and the Impulse Cartridge assembled at the bottom as shown above.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

c. To best meet the vibration requirements for the Longitudinal Axis and Transverse Axis it is recommended that a slip plate should not be used. In lieu of utilizing the slip plate, the vibrator should be turned 90° and the Payload Module Assembly attached/positioned to maintain orientation as indicated in para. b.

d. It is required that the stud nuts be replaced with high strength rods threaded on both ends in order to secure the Payload Module Assembly containing test items to the vibrating table attachment plate (Ref. Dwg 9311428). Use a washer and two nuts on each rod.

4.5.3.4 Shock. This test shall be performed in accordance with MIL-STD-810, Test Method 516.2, Procedure I, Figure 516.2-2 (Nominal Duration (D) milliseconds (ms); the tolerance shall be ± 1 ms). The cartridge shall be tested assembled to the Countermeasure Chaff: M-1 (Dwg. 9311402) and Payload Module Assembly (Dwg. 9311451), both to be G.F.E.

4.5.3.4.1 Shock test orientation. See paragraph 4.5.3.3.1 for axis orientation.

4.5.3.5 Temperature-altitude. This test shall be performed in accordance with MIL-STD-810, Test Method 504.1, Procedure I, Table 504.1 - II, Category 6. The cartridge shall be tested assembled to the Countermeasure Chaff: M-1 (Dwg. 9311402) and Payload Module Assembly (Dwg. 9311451), both to be G.F.E. The high temperature requirement shall be 85°C in lieu of 95°C listed in the referenced table.

4.5.3.6 Water immersion. Test cartridges shall be immersed in six inches of water minimum for fifteen minutes minimum. Within ten minutes after removal from the water the units shall be tested in accordance with 4.5.4 and 4.5.5. (Prior to function testing, exterior surface of units may be dried using a towel or compressed air).

4.5.4 All-fire sensitivity test. Using approved test equipment and instrumentation, the cartridge sample (sized as per Table 1 or Table 2 as appropriate) shall be tested for conformance to the requirement paragraph of 3.6. Any cartridge failing to meet the applicable requirement shall be classed defective. (Destructive Test)

4.5.4.1 Petaling. Following all-fire sensitivity testing, each cartridge shall be examined for visual evidence of petaling as described in paragraph 3.6.1. Any cartridge failing to meet the applicable requirement shall be classed defective.

4.5.4.2 Integrity of crimp. Following all-fire sensitivity testing, the cartridge shall be visually examined for integrity of crimp as detailed in paragrph 3.6.2. Any cartridge failing to meet the applicable requirement shall be classed defective.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

4.5.5 Pressure-time test. Using approved test equipment and instrumentation, the cartridge samples shall be tested for the output characteristics described in paragraph 3.7. Any cartridge failing to meet the applicable requirement shall be classed defective. (Destructive test)

4.5.6 Evacuation test. (First Article Inspection only) The M796 Impulse Cartridge shall be fitted into the M-1 Countermeasure Chaff (Dwg. 9311402) and Payload Module Assembly (Dwg. 9311451) attached to a Dispenser Assembly (Dwg. 9311434) all to be G.F.E., and fired from a suitable fixture approved in accordance with paragraph 4.4.4. Observation shall be made for conformance with the applicable requirement.

4.5.7 Velocity test. (First Article Inspection only). The M796 Impulse Cartridge shall be fitted into the Inert Flare for the M-130 General Purpose Dispenser (Dwg. 9354498) and Payload Module Assembly (Dwg. 9311451, GFE) mounted to a Dispenser Assembly (Dwg. 9311434, GFE) and fired vertically at 90 degrees (elevation) from an approved test fixture with suitable instrumentation capable of sensing and recording ejection velocity in accordance with paragrpah 4.4.4. Observations shall be made for conformance with applicable requirement.

5. PACKAGING

5.1 Packaging. Packaging shall be as specified on Drawing 9313891.

5.2 Packing and Marking. Packing and marking shall be as specified on Drawing 9313890.

5.3 Palletization. Palletizing shall be as specified on Drawing 19-48-4116/115E.

6. NOTES

6.1 Intended use. The components covered by this specification are intended for use on the M206 Flare and M-1 Chaff.

6.2 Ordering data. See MIL-A-48078.

6.3 Submission of inspection equipment design approvals. (See MIL-A-48078). Submit equipment designs as required to: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAT-I, Dover, NJ 07801.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.

6.4 Drawings. Drawings listed in Section 2 of this specification under the heading US Army Armament Research and Development Command (ARRADCOM) may also include drawings prepared by, and identified as, Edgewood Arsenal, Frankford Arsenal, Rock Island Arsenal or Picatinny Arsenal drawings. Technical data originally prepared by these activities is now under the cognizance of ARRADCOM.

6.5 Distribution of ammunition data cards. Distribution of ammunition data cards shall include the following: Commander, US Army Armament Research and Development Command, ATTN: DRDAR-QAT-M, Dover, NJ 07801 and US Army Armament Materiel Readiness Command, ATTN: DRSAR-QAD, Rock Island, IL 61299.

6.6 Changes from Previous Issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Custodian:
Army-AR

Preparing activity:
Army-AR

(Project 1377-A734)

☆U.S. GOVERNMENT PRINTING OFFICE: 1983—705-040/5743

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T02:13Z
Check the source to verify that this is the current version before use.