MILITARY SPECIFICATION

HELMET, FLYER'S, WINTER

This specification is approved for use by the Department of the Air Force, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers type B-9B flyer's helmet.

1.2 Classification. The helmet shall be furnished in the following sizes (see 6.2).

Size	Equivalent Size
Small	23 ±1/2 inch
Medium	24 ±1/2 inch
Large	25 ±1/2 inch
Extra large	26 ±1/2 inch

1.2.1 The size measurements of the finished helmets shall be in strict accordance with the measurements specified above and in the tabulation block of AF Drawing 51D24313. Measurements will be taken with the ear flaps up on the crown using Defense Personnel Support Center Number 15 gage.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications and standards. Unless otherwise specified (see 6.2), the following specifications and standards of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation, form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	Thread, Cotton
V-T-295	Thread, Nylon
UU-P-268	Paper, Kraft, Wrapping

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: the Engineering Division, San Antonio ALC/MMEDO, Kelly AFB, Texas 78241 by using the self addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

	DDD-L-20	Label, For Clothing, Equipage and Tentage, (General Use)
	PPP-F-320	Fiberboard; Corrugated and Solid, Sheet Stock (Container grade), and Cut Shapes

MILITARY

	MIL-W-530	Webbing, Textile, Cotton, General Purpose, Natural or in Colors
*	MIL-C-4294	Cloth, Nylon, Twill
	MIL-M-5631	Mouton (For Flight Clothing)
	MIL-C-6590	Cloth, Pile (Synthetic Mouton, Knitted)
	MIL-B-17757	Boxes, Shipping, Fiberboard (Modular Sizes)
*	MIL-C-43525	Cloth, Satin, Acetate or Rayon Face and Rayon or Cotton Back
	MIL-C-83450	Cloth, Meta-aramid Wrap, Meta-aramid/pro-aramid filling, Meta-aramid/Novoloid Filling Napped.

STANDARDS

FEDERAL

FED-STD-751	Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	Sampling Procedures and Tables for Inspection By Attributes
MIL-STD-129	Marking for Shipment and Storage
MIL-STD-147	Palletized Unit Loads
MIL-STD-794	Parts and Equipment, Procedures for Packaging of.

DRAWINGS

AIR FORCE

51D24313	Helmet, Aircrew, Sage Green, Nylon, Winter, Type B-9B

(Copies of specifications, standards, drawings, and publications required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Rules And Regulations Under The Wool Products Labeling Act of 1939

(Application for copies should be addressed to the Superintendent of Documents, Government Printing Office, Washington DC 20402.)

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM D 3951-82 Packaging, Commercial

(Application for copies of ASTM publications should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

3.1 First article. The requirements for the first article will be as specified by the procuring activity (see 6.2). The first article shall be examined for compliance with visual and dimensional requirements of this specification.

3.2 Materials.

* 3.2.1 Outershell. The fabric for the outershell shall be cloth, nylon twill conforming to type I, Class A, of MIL-C-4294. The color shall be USAF, Sage Green No. 1511.

* 3.2.2 Innershell. The fabric for the innershell (lining) shall be cloth, satin acetate or rayon face and rayon or cotton back (Type I or II) per MIL-C-43525. The color shall be USAF Sage Green No. 1529 or the color shall approximate that of the outershell.

* 3.2.3 Mouton. The mouton shall conform to MIL-M-5631, type I, class 1. The color shall be USAF, Sage Green No. 1523. Optional, synthetic fur mouton shall conform to MIL-C-6590, type II, as an alternate, the color may approximate the color of the synthetic mouton. The color shall be USAF, Sage Green No. 1530.

* 3.2.4 Webbing. The webbing for the chin strap shall be cotton, 3/4 inch wide, conforming to MIL-W-530, type IIa, Class 3. The color shall match the outershell fabric.

3.2.5 Fasteners, snap. The snap fastener used for chin strap closure shall consist of a button, socket, stud, and eyelet as referenced on AF Drawing 51D24313.

* 3.2.6 Reinforcements. Reinforcements for the snaps shall be 1-1/2 X 1-1/2 inch wide webbing, conforming to MIL-W-530, type IIa, Class I, or scrap pieces from the innerlining.

3.2.7 Threads.

3.2.7.1 Thread, cotton. The cotton thread used for handstitching shall conform to V-T-276, ticket No. 30, type 1B3, 3 ply. The color shall be USAF Sage Green No. 1509.

3.2.7.2 Thread, nylon. The nylon thread shall conform to V-T-295, type I or II, class 1, size B. The color shall be USAF, Sage Green No. 1511.

3.2.7.3 The dyed threads shall show fastness to laundering and light equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering and light.

3.2.8 Label. The helmet shall contain a combination identification-size label conforming to the requirements of DDD-L-20, type VI, class 4 for dry cleaned items. The label shall include the information required by the Wool Labeling Act of 1939.

3.3 Patterns. Standard patterns, which provide 1/4 inch seam allowance will be furnished by the Government and shall not be altered in any way. They shall be used only as a guide for cutting the supplier's working patterns which will be identical to the standard patterns.

3.3.1 List of pattern parts. The pattern components for the helmet shall be cut from materials as specified and according to the number of parts listed in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABLE I. List of Pattern Parts.

Material	Pattern Nomenclature	Cut Parts
Mouton	Neck and ear panel	1
Mouton	Chin strap guard	1
Mouton	Front panel	1
Cloth Nylon	Rear panel outershell	1
Cloth Nylon	Side panel outershell, face up	1
Cloth Nylon	Side panel outershell, back up	1
Cloth Nylon	Front panel outershell	1
* Cloth Aramid, Wool	Rear panel innershell	1
* Cloth Aramid, Wool	Side panel innershell, face up	1
* Cloth Aramid, Wool	Side panel innershell, back up	1
* Cloth Aramid, Wool	Front panel innershell	1
Cotton Webbing	Chin strap (see 51D24313)	1

3.3.2 Marking. The components of the helmet shall be marked to insure a uniform shade and size throughout the garment. Any method of marking may be used except:

a. Corrosive metal fastening devices

b. Sew-on type tickets

c. Adhesive type tickets which discolor or adhere to the material upon removal of the tickets.

3.3.3 All parts shall be marked, ticketed or bundled to insure uniform shade throughout the helmet. When the bundle system is used, plies from each bolt of fabric shall be separated (in the spreading) by tissue paper or other identifying media and the parts, after cutting shall be so segregated that each bundle shall contain only parts cut from the same piece of material. The bundles must be identified so that all the components for each end item shall be from the same piece of material.

3.4 Design. The helmet is a fully lined cold weather head covering, having a four-piece crown, mouton forehead, earflaps with a webbing chin strap that closes with snap fasteners (see Figure 1).


3.4.1 Figure. Figure 1 is furnished for information purposes only. To the extent of any inconsistencies between the written specification and Figure 1, the written specification shall govern.

3.5 Stitches, seams and stitching, stitch, seam and stitching types specified in Table II shall conform to FED-STD-751. When two or more methods of seams or stitches are given for the same operation, anyone may be used.


3.5.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in Table II.

3.5.2 Thread breaks and ends of seams. Ends of all seams and stitching shall be back tacked not less than 1/4 inch. Ends of continuous line of stitching shall overlap not less than 1/2 inch. Thread breaks shall be secured by stitching back of the break not less than 1/2 inch, unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

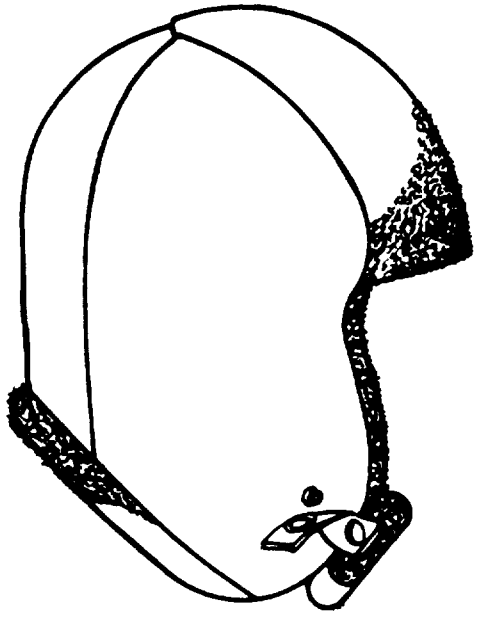

SIDE

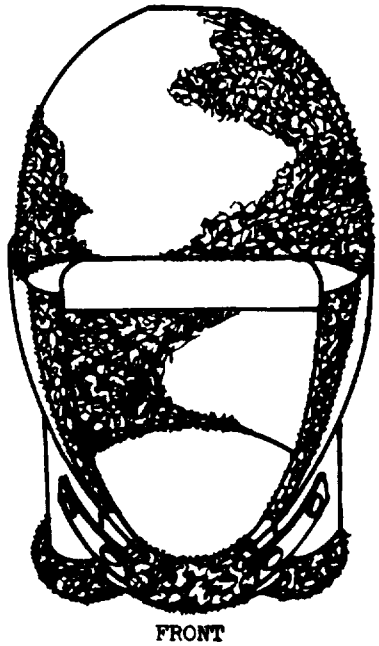

FRONT

FIGURE 1. HELMET, FLYING, WINTER

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of the Helmet.

No.	Description of Operation	Stitch Type	Seams and Stitching Type	Stitch per Inch
1.	Cutting			
	a. Cut all parts in strict accordance with patterns furnished which show size for proper assembly of all parts.			
	b. Cut the nylon outershell out of the same piece of material.			
*	c. Cut the aramid innershell out of the same piece of material.			
2.	Replacement of damaged parts			
	a. Replace at time of cutting any part containing damages such as holes, smashes, slubs or multiple floats.			
	b. Replace any part damaged, during the manufacturing process, by a needle chew, cut, tear, hole, mend or burn.			
3.	Prepare helmet •			
	a. The helmet shall consist of a four-panel innershell and a fourpanel outershell with a mouton front panel. A webbing adjustment (chin strap) with mouton chin strap guard fastened to the outside side panels with four snap fasteners.			
4.	Join seams of innershell			
	a. Join quadrants of the innershell as shown in section A-A of 51D24313 and leave one rear seam of the innershell open 3 inches.	301	SSa-1	8-12
	b. Abut the edges of the dart found on the neck and ear mouton panel and stitch together with a blind stitch. Stitch the top portion of the mouton panel to the innershell as shown in Section B-B of 51D24313; i.e., stitch mouton to midsection of the quadrants and turn mouton back so that edges of mouton follow the bottom edges of the innershell. Stitch around the edge.	304	SSa-1	8-12
5.	Label.			
	Sew instructions, size and identification label (on all four sides not more than 3/16 inch from edges) to center	301	LSbj-1	8-12

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

TABLE II. Construction of the Helmet

No.	Description of Operation	Stitch Type	Seams and Stitching Type	Stitch per Inch
	of innershell 1/2 ±1/16 inch above the back seam of the mouton.			
6.	Abut the edges of the darts found in the front mouton panel and blindstitch together Stitch mouton front panel to front panel of outer shell.	301 or 401	SSa-1	8-12
7.	Join seams of outershell (see 51D24313 sections A-A and C-C)	301 or 401		8-12
8.	Install the four studs, eyelets and reinforcement to outer shell and reinforcement webbing (ref 51D24313).			
9.	Join the inner and outer head pieces.			
*	a. The lining will be caught to the outershell by hand tacks or machine with three complete hand turns of double cotton thread at the following three places: Center top where the quarter seams meet and on each back quarter seam 1/4 ±1/8 inch above the mouton. The center top may be tacked by machine.	301 Or 401	SSa-1	8-12
	b. Place the outer and innershells face to face and sew together around entire edge.	301 or 401	SSa-1	8-12
*	c. Turn helmet through the 3 inch open seam and close by hand stitching.	Hand Or 301	SSa-1	7-10
10.	Chin strap			
	The chin strap shall be fabricated per AF drawing 51D24313.			
11.	Cleaning			
	a. Remove any spots.			
	b. Remove all thread ends.			
12.	Closing			
	Fasten all snap fasteners.			

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

3.6 Construction. The helmet shall be constructed with all the operations listed in Table II. The contractor is not required to follow the exact sequence of operations listed, provided the finished helmet is identical to that produced by the following sequence of operations.

3.7 Workmanship. The finished helmet shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable accepted quality levels.

3.8 Reclaimed materials. The use of reclaimed materials shall be encouraged to the maximum extent possible.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Inspection. Inspection shall be in accordance with provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.2.1 Testing of components. Testing of components shall be made in accordance with applicable subsidiary specifications and drawings referenced herein to the extent applicable, except that this specification shall govern in the event of conflict.

* 4.2.1.1 First article inspection. When required, the preproduction sample submitted in accordance with 3.1 shall be inspected as specified in 4.2.2.2 for compliance with design, construction, workmanship and dimensional requirements.

4.2.2 Examination of end item.

4.2.2.1 Classification of defects. The defects found during examination shall be classified in accordance with the lists shown in 4.2.2.2 and 4.2.2.3. All defects shall be classified as indicated below except for those with an asterisk (*) in the classification column which shall be classified as follows:

Major Defect - When seriously affecting appearance or serviceability.

Minor (A) Defect - When affecting appearance or serviceability, but not seriously.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

4.2.2.2 General defects.

	Defect	Classification		
			Minor	
		Major	A	B
	Cleanness			
	a. Spot or stain of a permanent nature			
	b. Removable spot or stain, clearly noticeable		X	
*	c. Three thread ends not trimmed, or loose threads or one or more shade tickets not removed			X
	d. Shade stamp marking exposed on outside		*	
	Components and assembly			
	a. Any defective component		*	
	b. Any component part omitted		*	
	c. Any required operation omitted or improperly performed		*	
	Cutting			
	Any component part not cut in accordance with directional lines indicated on patterns or specified requirements	X		
	Handtacks or machinetacks			
	Omitted or misplaced			
	- 1 tack			X
	- 2 tacks		X	
	- 3 tacks	X		
	Label-identification-size			
	a. Missing or incorrect		X	
*	b. Not securely attached			X
*	c. Wool content not included			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

Defect	Classification		
	Major	Minor A	Minor B
Material defects and workmanship damages (see note)			
a. Any weakening defect such as a smash, multiple float, or slub that may develop into a hole	*		
b. Shade bars, slubs, dye or finishing streaks	*		
c. Hole, cut, tear, mend or burn, or a needle chew that may develop into a hole	*		
d. Ruptured fibers in the line of sewing (usually caused by broken, blunt or hooked needles) affecting appearance or serviceability		X	
NOTE: Material defects and workmanship damages are to be classified as indicated when the defect definitely weakens fabric. If the defect does not definitely weaken the fabric but the defect is conspicuous when the item is worn, classify the defect as indicated. Material defects or workmanship damages which are inconspicuous and do not definitely weaken the fabric shall not be classified as defects.			
Seams and stitching			
a. Accuracy of seaming			
1. Seam twisted, puckered or pleated			
* (a) Seriously affecting appearance		X	
* (b) Affecting appearance, but not seriously			X
2. Part of garment caught in any unrelated operation or stitching	*		
3. Thread(s) used on outside not same shade or not satisfactorily matching shade of garment		X	
* 4. Three thread breaks or end(s) of stitching (when not caught in other seams or stitching) not backstitched 1/4 inch			X
b. Gage of stitching (edge, top or raise stitching)			
1. Not within range of gage specified or varies more than 1/16 inch when no range is specified			X

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

Defect	Classification		
	Major	Minor	
		A	B
c. Open seam. A break in a line of stitching or continuous skipped or run-off stitches (except on edge, top or raise stitching) constitute an open seam.			
1. On joining seam(s)			
- over 1/8 inch to and including 1/4 inch			X
- over 1/4 inch to and including 1/2 inch		X	
- over 1/2 inch	X		
2. On hem(s)			
- over 1/4 inch to and including 1/2 inch			X
- over 1/2 inch		X	
d. Stitches skipped or broken (on edge, top or raise stitching when seam is seamed, turned and stitched)			
- over 1/4 inch to and including 1/2 inch			X
- over 1/2 inch		X	
* e. Raw edges. A raw edge is classified as such when it occurs along an edge required to be turned under but the edge is not securely caught in the stitching.			
1. On outside			
- over 1/8 inch to and including 1/4 inch			X
- over 1/4 inch		*	
2. On inside			
- over 1/2 inch to and including 2 inches			X
- over 2 inches		X	
f. Run-offs			
1. On joining seams, when resulting in an open seam, score as "open seam"			
2. On edge, top or raise stitching when not resulting in open seam (outside only)			
- over 1/2 inch to and including 1 inch			X
- over 1 inch		X	
g. Not specified seam or stitch type		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

Defect	Classification		
	Major	Minor A	Minor B
h. Stitch tension. (Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in the lengthwise direction of seam or stitching.)			
1. Loose tension, resulting in a loose seam	X		
2. Loose tension on edge, top or raise stitching, recognized by loosely exposed loops of top or lower thread.		X	
3. Tight tension (stitches break when normal strain is applied to seam or stitching).		X	
i. Stitches per inch. (To be scored only when the condition exists on major portion of seam or stitching)			
1. Less than minimum number permitted by minus tolerances:			
- 1 stitch			X
- 2 stitches		X	
- 3 or more stitches	X		
* 2. More than maximum number permitted by plus tolerance:			
- 2 stitches			X
- 3 stitches		X	
- 4 or more stitches	X		
Shaded parts			
* a. Shade varying within a part seriously affecting appearance.	X		
* b. Shade varying between two or more parts affecting appearance.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

Defect	Classification		
	Major	Minor A	Minor B
Snap fasteners			
a. Sockets			
1. One or more omitted, defective or improperly clinched	X		
* 2. Alignment - one or more sockets out of alignment with stud seriously affecting appearance.		X	
b. Studs			
One or more omitted, defective or improperly clinched.	X		

4.2.2.3 Size measurements. Any measurement deviating from the nominal dimension and tolerance in table of measurements shall be scored as a size measurement defect.

4.2.2.4 Acceptable quality levels and inspection levels. The inspection levels and acceptable quality levels expressed in defects per 100 units (DHU) shall be as follows:

For defects listed in 4.2.2.2 (general defects)

Inspection Level II of MIL-STD-105

AQL's

Major - 2.5 DHU
Major and Minor A - 6.5 DHU
Major and Minor A and B - 10.0 DHU

For defects listed in 4.2.2.3 (size measurements)

Inspection Level S-3 of MIL-STD-105

Defects (one class) - 4.0 DHU

4.2.3 Examination of preparation for delivery requirements. An examination shall be made to determine that packaging, packing and marking requirements of Section 5 of this specification are complied with. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 4.0 defects per 100 units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence of method of application.
Materials	Any component missing. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling, bulging or distortion of containers.
Content	Number of bundles per container is more or less than required. Number of helmets per bundle is more or less than required. 1/ Size shown on one or more helmets not as specified on outer container. 1/

1/ For this defect, two bundles from each container in the sample shall be examined.

5. PACKAGING.

5.1 Packaging. Packaging shall be level A, C, or commercial, as specified (see 6.2).

5.1.1 Level A. Each helmet shall be inserted in a snug-fitting polyethylene bag fabricated from flexible film 0.0015 inch thick. All seams and closures shall be heat sealed. During the heat sealing operation, excess air within the bag shall be expelled to the extent necessary to insure that the required multiples of packaged units will fit into the shipping container.

* 5.1.2 Level C. The Level C preservation for helmets shall conform to the MIL-STD-794 requirements for this level.

* 5.1.3 Commercial. Helmets shall be packaged in accordance with the applicable requirements of ASTM D 3951-82.

5.2 Packing. Packing shall be level A, B, C or commercial, as specified (see 6.2).

5.2.1 Level A. Fifty helmets of one size only, packaged, as specified in 5.1, shall be packed in a fiberboard shipping container assembled, closed and reinforced conforming to class weather-resistant, grade V2s, size 3A of MIL-B-17757. The fiberboard used for fabricating the liner shall be type CF, class weather-resistant, variety DW, grade V15c of PPP-F-320. Level A packages shall be packed flat two in length, ten in width, and two in depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

5.2.2 Level B. Fifty helmets of the same size only, packaged as specified in 5.1 shall be packed in a fiberboard shipping container assembled and closed conforming to class domestic, grade 275, size 3A of MIL-B-17757. The fiberboard used for fabricating the liner shall be type CF or SF, class domestic, variety DW, grade 275 of PPP-F-320. Level A packages shall be packed flat two in length, ten in width, and two depth within a shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of commercial kraft paper. Toward the end of the contract or when there are less than the required amount per container of the same size, mixed sizes may be packed in the same container.

5.2.2.1 When specified (see 6.2), the shipping container shall be grade V3c of V3s fiberboard box fabricated in accordance with MIL-B-17757 and closed in accordance with the appendix of the container specification.

* 5.2.3 Level C. The Level C packing for helmets shall conform to the MIL-STD-794 requirements for this level.

* 5.2.4 Commercial. The preserved helmets shall be packed in accordance with the applicable requirements of ASTM D 3951-82.

5.3 Marking. In addition to any special marking required by the contract or order (see 6.2), each unit pack, intermediate and exterior container and unitized load shall be marked in accordance with MIL-STD-129 or ASTM D-3951-82, as applicable.

5.3.1 Labels, mixed sizes. Each shipping container, packed with mixed sizes, shall have securely attached to the end and side, directly under the printing or stenciling, a white paper label 5 by 4 inches, with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly stamped or printed the correct quantity of sizes contained therein.

5.3.1.1 Polyethylene bagged packages shall have the required information legibly printed or stamped in black on a white paper label inserted within the bag so as to permit ready identification. The paper label shall contain the following information:

Stock Number
Specification No. MIL-H-83776A(USAF)
Nomenclature
Quantity and size

* 5.4 Palletization. When specified (see 6.2), helmets packed as specified in 5.2 shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The helmet covered by this specification is intended for wear by male military flyers. It is worn alone or as a liner for the helmet in cold weather.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

a. Title, number, and date of this specification.

b. Size required (see 1.2).

c. First article as specified (see 3.1).

d. Selection of applicable levels of packaging and packing (see 5.1 and 5.2).

e. When weather-resistant grade V3c or V3s fiberboard shipping containers are required for level B packing (see 5.2.2.1).

f. When palletization is required (see 5.4).

6.3 Changes from previous issue. The margins of this specification are marked with asterisks to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Air Force - 99

Review Activity:
DLA CT
Navy - NU

User Activity:
Air Force - 45

Preparing Activity:
Air Force - 82

Project No. 8415-F431

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 73236 WASH DC

POSTAGE WILL BE PAID BY HQ U S AIR FORCE

San Antonio ALC/MMEDO
Kelly AFB, TX 78241

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-H-83776A(USAF)	Helmet, Flyer's, Winter Fuel

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5 PROBLEM AREAS

a. Paragraph Number and Wording

b Recommended Wording

c Reason/Rationale for Recommendation

6 REMARKS

7a NAME OF SUBMITTER *(Last, First, MI)* – Optional	b WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8 DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T09:40Z
Check the source to verify that this is the current version before use.