MILITARY SPECIFICATION

MOUNTING MT-6232/GRC-193A & MOUNTING MT-6233/GRC-193A

This specification is approved for use within the Communications-Electronics Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers two types of mountings used to allow vehicular operation of radio set AN/GRC-193A.

2. APPLICABLE DOCUMENTS.

2.1 Government Documents.

2.1.1 Specifications and Standards. The following specifications and standards form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto cited, in the solicitation.

SPECIFICATIONS

Federal	
PPP-B-636	Boxes, Shipping, Fiberboard
Military	
MIL-P-116	Preservation, Methods of
MIL-S-901	Shock Tests, High-Impact; Shipboard Machinery, Equipment and Systems, Requirements for
MIL-Q-9858	Quality Program Requirements
MIL-P-11268	Parts, Materials, and Processes Used in Electronic Equipment
MIL-F-14072	Finishes for Ground Electronic Equipment

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, US Army Communications-Electronics Command and Fort Monmouth, ATTN: AMSEL-ED-TO, Fort Monmouth, New Jersey 07703-5016 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC: FSC 5820

Distribution Statement A. Approval for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

MIL-E-16400	Electronic, Interior Communication and Navigation Equipment, Naval Ship and Shore. General Specification For
MIL-P-23377	Primer Coatings: Epoxy-Polyamide, Chemical and Solvent Resistant.
MIL-R-29418	Radio Set; AN/PRC-104(V)
MIL-R-29422	Radio Set; AN/GRC-193
MIL-C-46168	Coating, Aliphatic Polyurethane, Chemical Agent Resistant
MIL-C-55442	Cable Assemblies and Cord Assemblies, Packaging of
MIL-E-55585	Electronics Equipment and Parts, Packaging Of

STANDARDS

Military

MIL-STD-105	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-109	Quality Assurance, Terms and Definitions
MIL-STD-252	Classification of Visual and Mechanical Defects for Equipment, Electronic, Wired, and Other Devices
MIL-STD-454	Standard General Requirements for Electronic Equipment
MIL-STD-810	Environmental Test Methods
MIL-STD-831	Test Reports, Preparation Of
MIL-STD-1275	Electrical Circuit, 28 Volt Transient Characteristics for Military Radios
MIL-STD-2073-2	Packaging Requirement Codes

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the current version before use.

2.1.2 Other Government Documents and Drawings. The following other Government documents and drawings form a part of this specification to the extent specified herein. Unless otherwise specified, the issues shall be those in effect on the date of the solicitation.

DRAWINGS

755017B0700 (USMC)	MT-6232/GRC-193A Mounting Base, Electrical Equipment
755017B0701 (USMC)	Rack, Mounting
755017B0759 (USMC)	MT-6233/GRC-193A Mounting Base, Electrical Equipment
755017B0760 (USMC)	Tray, Mounting

DOCUMENTS

SEL FORM 1183	Systems Safety Design Verification Checklist

(Copies of specifications, standards, drawings and other Government documents required by contractors in connection with specific procurement functions required should be obtained from the procuring activity or as directed by the contracting officer. Both the title and number or symbol should be stipulated when requesting copies).

2.2 Order of Precedence. In the event of a conflict between the text of this specification and the references cited herein (except for detail associated specification sheets or MS standards), the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Item Definition. Mount MT-6232/GRC-193A, including mounting rack with special cables, shall provide a means of mounting 400 watt HF Radio Set AN/GRC-193A in a wheeled vehicle. Mount MT-6233/GRC-193A, including mounting tray with special cables, shall provide a means of mounting Radio Set AN/GRC-193A in a tracked vehicle. The mounts shall reduce shock and vibration levels to the AN/GRC-193A sufficiently such that no degradation of specified performance of the individual components of the AN/GRC-193A shall result. The intended use includes, but is not limited to M151A2 utility jeep; M561 (Gamma Goat) truck; M882 truck, and M113 and M577 armored personnel carrier, which operate in all types of weather and terrain. The specified environmental requirements are expected to span both the intended application and worldwide deployment of the vehicles.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the current version before use.

3.2 Characteristics.

3.2.1 Performance.

3.2.2 Electrical Requirements. The following electrical tests shall be performed to determine the effectiveness of the mounting (with isolators) in reducing vehicular shock and vibration levels presented to the individual components of the AN/GRC-193A, such that no degradation of specified system performance shall result. When testing the effectiveness of the mounting in accordance with 4.6.3, the following additional requirements shall be met.

3.2.2.1 Input Power. With primary input power of 28 VDC nominal, conforming to MIL-STD-1275, input power to the RT-1209( )/URC (part of AN/PRC-104A) shall be 24 ± .5V.

3.2.2.2 Output Power. RF power output into a 50 ohm resistive load shall be 400W ± 1 dB CW or PEP.

3.2.2.3 Hum and Ripple. Hum and ripple shall be at least 40 dB below the output level of a single tone modulating the transmitter to rated peak envelope power over the frequency range of 2.0000 to 29.9999 MHz.

3.2.2.4 Receiver Sensitivity. The output signal-plus-noise-plus-distortion to noise-plus-distortion ratio shall be at least 10 dB when a radio frequency (RF) signal of 1.4uV open circuit from a 50 ohm source is applied to the receiver input terminals for a 2.0000 to 29.9999 MHz range.

3.2.3 Service Conditions. The equipment shall meet the following service conditions.

3.2.3.1 Low Temperature. (MT-6233/GRC-193A only). Mounting MT-6233/GRC-193A, when loaded by the components of the AN/GRC-193A or equivalent dummy load, shall withstand exposure to ambient air temperatures as low as -51°C (-60°F), when tested in accordance with 4.6.3.1. Verification shall be by inspection. (This test may be omitted if the shock/vibration isolators used in the mounting have been tested and approved for military applications).

3.2.3.2. High Temperature. (MT-6233/GRC-193A only). Mounting MT-6233/GRC-193A, when loaded by the components of the AN/GRC-193A or equivalent dummy load, shall withstand exposure to ambient air temperatures as high as +68.3°C (+155°F) when tested in accordance with 4.6.3.2. Verification shall be by inspection. (This test may be omitted if the shock/vibration isolators used in the mounting have been tested and approved for military applications).

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:58Z
Check the source to verify that this is the currenversion before use.

3.2.3.3 Humidity. The equipment shall withstand prolonged exposure to extreme high humidity levels as encountered in tropical areas without physical damage. There shall be no deterioration or corrosion of finishes or metals when tested in accordance with 4.6.3.3. Such corrosion shall be defined as any visible degradation of the equipment surfaces that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surface.

3.2.3.4 Dust (Fine Sand). The mounting shall show no evidence of damage or abrasion or clogging when tested in accordance with 4.6.3.4.

3.2.3.5 Salt Fog. The equipment shall be resistant to the corrosive effects of a salt fog atmosphere when tested in accordance with 4.6.3.5. There shall be no corrosion of finishes or metals. Such corrosion shall be defined as any visible degradation of the equipment surfaces that can be attributed to flaky, pitted, blistered, or otherwise loosened finish or metal surfaces. There shall also be no clogging or binding of moving mechanical parts.

3.2.3.6 Vibration and Shock. The equipment shall withstand vibration and shock induced during vehicular transport upon military vehicles, over all types of roads and cross-country terrain. Mounting MT-6233/GRC-193A only: In addition, Mounting MT-6233/GRC-193A shall be resistant to high level shock caused by ballistic impact, air explosions, and similar combat field conditions.

3.2.3.6.1 MT-6232/GRC-193A. Mounting MT-6232/GRC-193A shall be tested for vibration in accordance with 4.6.3.6.1. There shall be no damage to the mounting or to the radio, and there shall be no degradation in performance of the radio to the requirements of 3.2.2, during or after the completion of the vibration test.

3.2.3.6.2 MT-6233/GRC-193A. Mounting MT-6233/GRC-193A shall be tested for vibration in accordance with 4.6.3.6.2. There shall be no damage to the mounting or to the radio, and there shall be no degradation in performance of the radio when tested to the requirements of 3.2.2, during or after the completion of the vibration test.

3.2.3.6.3 MT-6232/GRC-193A. Mounting MT-6232/GRC-193A shall be tested in accordance with 4.6.3.7.1. The equipment shall not come loose from its mounts as a result of the CRASH HAZARD shock test.

3.2.3.6.4 MT-6232/GRC-193A. Mounting MT-6232/GRC-193A when tested in accordance with 4.6.3.7.2 shall exhibit no visible damage, and there shall be no degradation in performance of the radio when tested to the requirements of 3.2.2 after the completion of the shock test.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the current version before use.

3.2.3.6.5 MT-6233/GRC-193A. Mounting MT-6233/GRC-193A, shall be tested in accordance with 4.6.3.7.3 for ballistic shock. There shall be no damage to the mounting or to the radio, and there shall be no degradation in performance of the radio to the requirements of 3.2.2 after the completion of the ballistic tests.

3.2.3.7 Fungus. The equipment (including accessories), in the assembled-and-ready-for delivery condition, shall provide no nutrients in material, coating or contaminant form or support fungal growth when tested in accordance with paragraph 4.6.3.8. Only inherently fungus resistant grades of materials per requirement 4, MIL-STD-454 shall be used. After 28 days, based on visual examination, the equipment or samples shall show no more than sparse microbial growth with restricted tuberal growth development in an area 10% or less of the total area and no more than six unrelated minute colonies. The equipment shall fail if it shows more than the growth specified above.

3.3 Design and Construction.

3.3.1 Production Drawings. These mounting bases MT-6232/GRC-193A and MT-6233/GRC-193A shall be fabricated and assembled in accordance with the drawings and other documents listed herein (2.1).

3.3.2 Workmanship. Workmanship shall be in accordance with Requirement 9 of MIL-STD-454.

3.3.2.1. Mechanical Dimensions. The mounting shall be so dimensioned as to permit normal attachment of applicable components of the AN/GRC-193A made to present equipment drawing tolerances, without modification of such components or mounting and shall be inspected in accordance with paragraph 4.4.3.1. No modification shall be permitted to the mounting for proper attachment to the vehicle.

3.3.2.2. Edge Rounding. All exposed edges, projections, and corners shall be rounded sufficiently to insure personnel safety.

3.3.2.3 Parts, Materials, and Processes. In addition to the requirements of this specification, the requirements of MIL-P-11268, including the selection requirements therein, shall apply.

3.3.2.4 Finish. The mountings shall be finished in accordance with MIL-C-46168(ME) Type-2, Forest Green and the equipment drawings. This includes finish of hardware, such as handles, hinges, screws, with necessary touch-up after mounting and testing. Pretreatment film on all exterior surfaces shall be per MIL-F-14072C with Primer per MIL-P-23377.

3.3.2.5 Marking. Marking shall conform to Requirement 67 of MIL-STD-454.

3.3.2.5.1 Visibility. Wherever practicable, identification markings will be readily visible with minimum disassembly of the equipment.

3.3.2.5.2 Serial Numbers. The mountings shall have serial numbers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

3.3.3 Human Performance/Human Engineering. Human engineering shall conform to Requirement 62 of MIL-STD-454.

3.3.4 Safety Engineering (see 4.8).

3.3.4.1 Personnel Hazard. Personnel hazards shall be kept to a minimum in accordance with Requirement 1 of MIL-STD-454.

3.4 First Article Samples. Unless otherwise specified in the contract or purchase order, and prior to submission of any complete production items for acceptance, the contractor shall furnish first article samples for determination of conformance to this specification. Examinations and tests shall be those specified herein. Approval of the first article samples by the procuring activity shall not relieve the contractor of his obligation to supply mounts conforming to this specification. Any changes or deviations of the production items from the first articles shall be subject to the approval of the contracting officer.

4. QUALITY ASSURANCE PROVISIONS.

4.1 Responsibility for Inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, subject to approval by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Responsibility for Compliance. All items must meet all requirements of Sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

4.1.2 Government Verification. All quality assurance operations performed by the contractor will be subject to Government verification at any time. verification will include (a) surveillance of the operations to determine that practices, methods, and procedures of the written inspection system are being

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the currentversion before use.

properly applied, (b) Government production inspection to measure quality of the product to be offered for acceptance, and (c) Government production inspection of delivered products to assure compliance with all inspection requirements of this specification. Failure of the contractor to promptly correct deficiencies discovered by him or of which he is notified shall be cause for suspension of acceptance until corrective action has been made or until conformance of the product to prescribed criteria has been demonstrated.

4.1.3 Test Procedures. The contractor shall prepare test procedures for Government approval covering first article and quality conformance inspection.

4.1.4 Quality Assurance Terms and Definitions. Quality Assurance terms used in this specification shall be defined in MIL-STD-109.

4.2 Classification of Inspections and Tests. The inspection requirements specified herein are classified as follows:

a. First Article Inspection (See 4.3).
b. Production Inspection (See 4.4).
c. Environmental Inspection (See 4.6).
d. Packaging Inspection (See 4.10).

4.2.1 Test Plans. Test plans describing in detail the first article production and sample testing shall be prepared by the contractor in accordance with the requirements of MIL-STD-831 and submitted to the contracting officer for approval prior to initiation of testing in accordance with the CDRL requirements of the contract. Approval of the test plans is required prior to the commencement of testing. The test plans shall include all test procedures deemed necessary and practicable by the contractor to demonstrate compliance with this specification.

4.2.2 Tests. Table I sets forth testing requirements for first article, production, sample, and environmental conditions.

4.3 First Article Inspection. Unless otherwise specified, units shall be required for first article inspection. The Government representative present will select which items are to be subjected to each test. The requirements of paragraph 4.4.1 applies as a prerequisite to performing first article inspection tests.

4.3.1 First Article Inspection Report. A first article inspection report shall be submitted to the Government covering the results of the contractor's first article inspection.

4.3.2 First Article Tests. First article inspection shall be as indicated in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

4.4 Production Inspection. Production inspection shall be made on every equipment offered for delivery. The inspection shall comprise such examination and testing as will prove the workmanship and reveal the omissions and errors of the production process such as functional and performance tests at a limited number of points, tests which detect deviations from design, tests of adjustment, and tests which detect hidden defects of material. Production inspection shall consist of the tests and examinations approved in accordance with 4.4.1 and shall include the requirements of paragraph 4.4.3 and Table I as specifically indicated.

4.4.1 Group A Inspections. Each unit on contract or purchase order shall be inspected for conformance to the inspections specified in paragraph 4.4.3. Discrete lots shall be formed from units that pass this inspection. Factors of lot composition not defined herein, or in the contract or purchase order shall be in accordance with MIL-STD-105. Each lot shall be subject to sampling inspection, utilizing the procedures and the general inspection levels of MIL-STD-105 and an AQL of 1 percent for all electrical inspections. The AQL for visual and mechanical inspections shall be 10 defects per hundred units for major defects and 15 defects per hundred units for minor defects (major and minor defects are defined in MIL-STD-105 and MIL-STD-252). Defects in all inspections other than visual and mechanical shall be considered major. Group A inspection specified in paragraph 4.4.3 shall be performed in any order.

4.4.2 Group B Inspections. Group B inspections shall be performed on inspection lots that have passed Group A inspection. Group B inspections are specified in paragraph 4.6 and Table I. This inspection shall conform to the special inspection levels of Table I of MIL-STD-105. The Group B AQL shall be 4 percent and the inspection level shall be S-4 (Per MIL-STD-105).

4.4.3 Inspection of Parts, Subassemblies and Items. Inspection shall be performed to determine conformance to the specified requirements prior to inspection of preparation for delivery.

4.4.3.1 Mechanical Inspection. The mounting shall be given a thorough mechanical and visual inspection to determine that the quality of all materials and workmanship is in compliance with the requirements specified in paragraph 3.3.2.1 and in MIL-E-16400. Particular attention shall be given to the following:

a. Completeness.
b. Name plates, identification markings and labels.
c. Ease of operation of connector mating, thumb screws, controls and switches and any other part intended for adjustment, movement or operation.

Source: https://assist.dla.mil -- Downloaded: 202640-22T19:58Z
Check the source to verify that this is the current version before use.

d. Finishes.
e. Welded joints.
f. Check of solder joints.
g. The fit of components in their respective positions.
h. Check of mounting means.
i. Check of safety features.
j. Fastening and securing devices of parts.
k. Accessibility of components and parts of servicing.
l. Cable run between components including plugs and receptacles.
m. Fit of sealing gasket on cover and wear on gasket.
n. Check fitting of all connectors.
o. Test points.
p. Overall dimensions.
q. Weight.
r. Other visual defects.

4.6 Environmental Inspection. Testing indicated for environmental inspection in Table I shall be performed upon samples for production lots as determined by the following sampling rate.

Quantity Produced (Per Lot)	Quantity To Be Tested
1-200	1 for Type 1
Any	1 for Type II at Production Midpoint

4.6.1 Nonconforming Environmental Sample Units. In the event a sample unit fails any type of environmental inspection, actions required shall be as specified in the contract or purchase order.

4.6.2 Reinspection of Conforming Environmental Sample Units. Unless otherwise specified in the contract, sample units which have been subjected to, and passed environmental tests may be accepted on the contract provided they are resubjected to, and pass, production inspection after repair of all damage.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

TABLE I. ENVIRONMENTAL INSPECTION

INSPECTION	PARAGRAPH
Type I	
Vibration	4.6.3.6.1, 4.6.3.6.2
Shock	4.6.3.7.1, 4.6.3.7.2, 4.6.3.7.3
Humidity	4.6.3.3
Temperature	
Low	4.6.3.1
High	4.6.3.2
Type II	
Dust (Fine Sand)	4.6.3.4
Salt Fog	4.6.3.5
Fungus	4.6.3.8

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

4.6.3 Environmental Tests.

4.6.3.1 Low Temperature. (MT-6233/GRC-193A only. Omit if shock/vibration isolators have been approved for military use). Mounting MT-6233/GRC-193A, as loaded by the components of the AN/GRC-193A or suitable dummy load, shall be subjected to the test of MIL-STD-810, Method 502.2, Procedure I. Lower the internal chamber temperature in Step 2 to -51°C (60°F) for a period of 2 hours. The requirements of 3.2.3.1 shall be met.

4.6.3.2 High Temperature. (MT-6233/GRC-193A) only. Omit if shock/vibration isolators have been approved for military use). Mounting MT-6233/GRC-193A, as loaded by the components of the AN/GRC-193A or suitable dummy load, shall be subjected to the test of MIL-STD-810, Method 501.2, Procedure I. In Step 4, raise the internal chamber temperature to +49°C (+120°C). Maintain internal chamber temperature for 6 hours at +49°C (+120°F). Raise the internal chamber temperature to +68.3°C (+155°F) within a time period of 1 hour and maintain at that temperature for 4 additional hours. Lower the internal chamber temperature to +49°C (+120°F) within a time period of 1 hour. Repeat the above steps two additional times, for a total of three 12-hour cycles. The requirements of 3.2.3.2 shall be met.

4.6.3.3 Humidity. The equipment shall be subjected to the test of MIL-STD-810, Method 507.2, Procedure III. Step 7 shall be omitted. The requirements of 3.2.3.3 shall be met.

4.6.3.4 Dust (Fine Sand). The equipment shall be subjected to the test of MIL-STD-810, Method 510.1, Procedure I. The requirements of 3.2.3.4 shall be met.

4.6.3.5. Salt Fog. The equipment shall be subjected to the test of MIL-STD-810, Method 509.2, Procuedure I. In Step 2, the 48 hour period shall be constant wetting. Delete Step 3. Operation in Step 4 shall take place after a gentle wash in running water not warmer than +38°C (+100°F) and drying. The requirements of 3.2.3.5 shall be met.

4.6.3.6 Vibration.

4.6.3.6.1 Vibration (Wheeled Vehicles). MT-6232/GRC-193A. Mounting MT-6232/GRC-193A as loaded by the AN/GRC-193A, shall be mounted by normal means and tested while operating. The test item shall be vibrated along each axis in accordance with the applicable test levels and frequency range, from the applicable figures. The frequency of applied vibration shall be swept over the specified range logarithmically in accordance with Figure 1. The specified sweep time is that of an ascending plus a descending sweep and is twice the ascending sweep time shown on Figure 1 for the specified range. Test levels shall be according to Curve V (Figure 2). The test time schedule shall be a

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the current version before use.

sinusoidal cycling time of 30 minutes/1000 miles for a maximum cycle time of 5 1/2 hours and a sweep time of 12 minutes for 5 Hz-200Hz-5Hz. When test item resonances below 5 Hz are measured or expected the test curves shall be extended to 2 Hz and the sweep time shall be 18 minutes (2-500-2 Hz); 15 minutes (2-200-2 Hz). The equipment shall meet the requirements of paragraph 3.2.3.6.1.

4.6.3.6.2 Vibration (Tracked Vehicle). MT-6233/GRC-193A. Mounting MT-6233/GRC-193A as loaded by the AN/GRC-193A, shall be mounted by normal means and tested while operating. The test item shall be vibrated along each axis in accordance with the applicable test levels and frequency range from the applicable figures. The frequency of applied vibration shall be swept over the specified range logarithmically in accordance with Figure 1. The specified sweep time is that of an ascending plus a descending sweep and is twice the ascending sweep time shown on Figure 1 for the specified range. Test levels shall be according to Curve W (Figure 2). The test time schedule shall be a sinusoidal cycling time of 30 minutes/1000 miles for a maximum cycling time of 3 hours and a sweep time of 15 minutes for 5Hz-500Hz-5Hz. When test item resonances below 5 Hz are measured or expected the test curves shall be extended to 2 Hz and the sweep time shall be 18 minutes (2-500-2 Hz); 15 minutes (2-200-2Hz). The equipment shall meet the requirements of paragraph 3.2.3.6.2.

4.6.3.7 Shock.

4.6.3.7.1 MT-6232/GRC-193A. Mounting MT-6232/GRC-193A, as loaded by dummy load which simulates the weight and center of gravity of the AN/GRC-193A, shall be subjected to the test of MIL-STD-810, Method 516.3, Procedure V. The shock pulse shall be in accordance with Figure 516.3-4. The nominal duration of the pulse shall be 5 msec and the peak acceleration shall be 50 g's. The requirements of 3.2.3.6.3 shall be met.

4.6.3.7.2 MT-6232/GRC-193A. Mounting MT-6232/GRC-193A, as loaded by the AN/GRC-193A, shall be subjected to the test of MIL-STD-810, Method 516.3, Procedure I. The shock pulse shall be 20 g's peak for a nominal duration of 11 msec in accordance with Figure 516.3-4 for trucks and semi-trailers. The requirements of 3.2.3.6.4 shall be met.

4.6.3.7.3 MT-6233/GRC-193A. Mounting MT-6233/GRC-193A, as loaded by the AN/GRC-193A, shall be subjected to the test of MIL-S-901 for Type A, lightweight equipment. Mounting of the equipment to the test plate shall simulate the most severe condition which may be encountered in service. The requirements of 3.2.3.6.5 shall be met.

4.6.3.8 Fungus. MT-6232/GRC-193A and MT-6233/GRC-193A. The equipment in the assembled-and-ready-for delivery condition, or representative samples subject to approval of the procuring agency, shall be subjected to the test of MIL-STD-810, Method 508.3. The requirement of 3.2.3.7 shall be met.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.


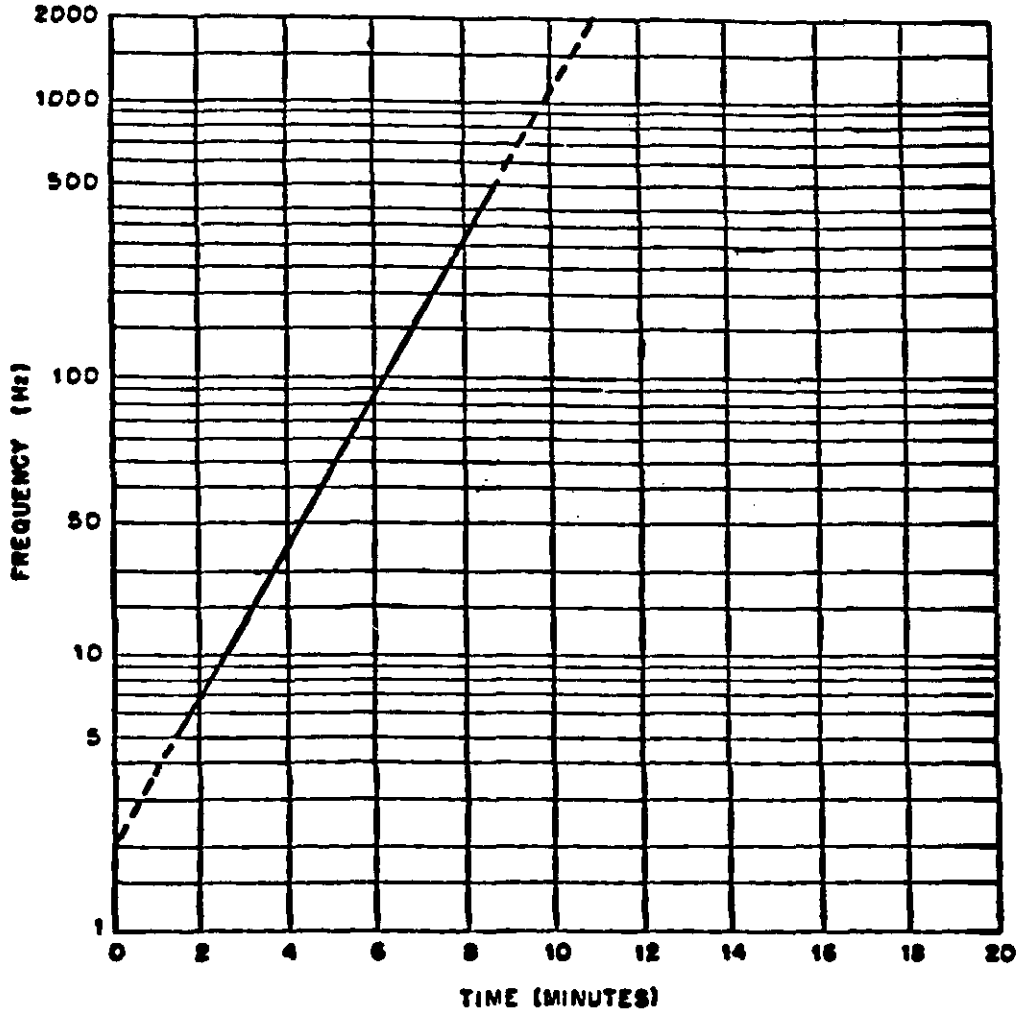


Figure 1. Logarithmic Sweep

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

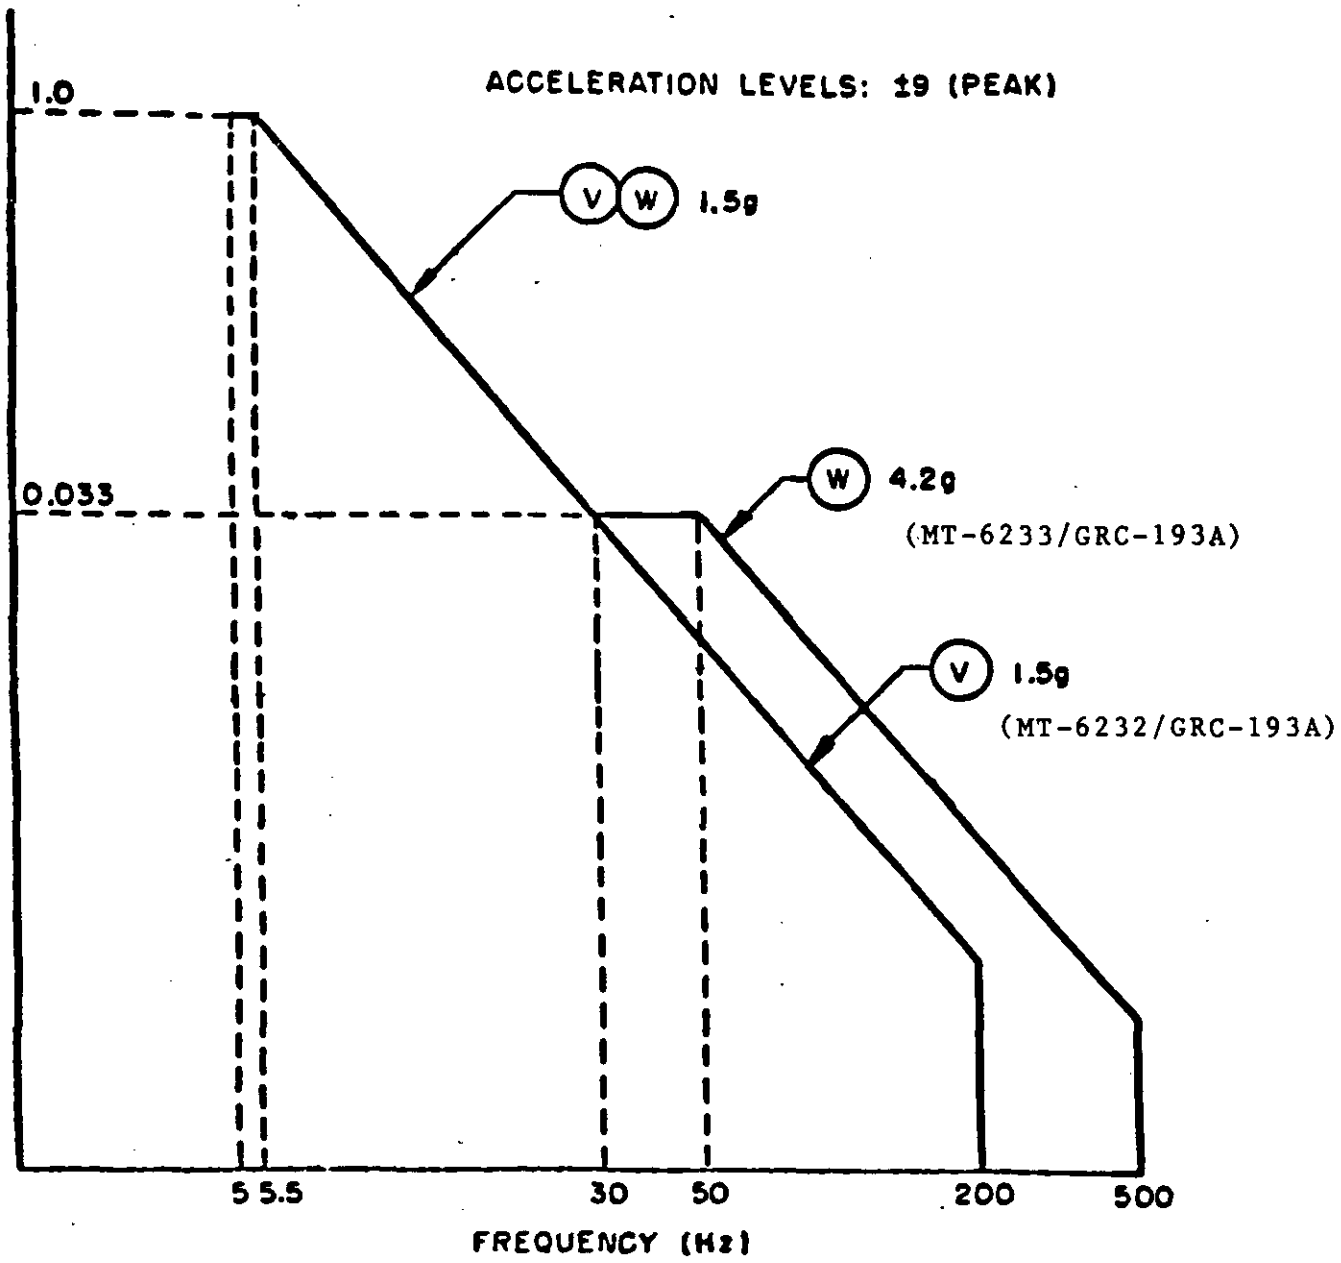

Note: All curves shall be extended to 2 Hz when test item resonances below 5 Hz are expected

Figure 2. Vibration Test Curves for Equipment Installed in Ground Vehicles.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the currenversion before use.

4.7 Performance Measurements. Before, and after the environmental inspections, the tests identified in para 3.2.2 shall be performed as a minimum. Performance results and recorded data specifically required under the individual tests shall be provided. These tests are also to be performed during vibration bounce and shock tests as required by paragraph 3.2.3.6. Failure of the equipment to satisfactorily pass these tests shall constitute rejection criteria.

4.8 Safety Engineering. A visual inspection shall be performed to verify compliance with the requirements of 3.3.4. SEL FORM 1183, must be completed as part of First Article testing.

4.9 Visual and Mechanical Inspection. The mountings shall be examined to verify compliance with the requirements of 3.3.2, 3.3.2.1, 3.3.2.2, 3.3.2.3, 3.3.2.4 and 3.3.2.5.

4.10 Packaging Inspection. Packaging inspection requirements specified herein are classified as follows:

a. First Article Inspection of Packaging.
b. Quality Conformance Inspection of Packaging.

4.10.1 First Article Inspection of Packaging. Unless otherwise specified in the contract, First Article Inspection of Packaging shall be in accordance with the Unit Pack Design Validation Requirements of MIL-P-116.

4.10.2 Quality Conformance Inspection of Packaging.

4.10.2.1 Materials Inspection. All materials to be used in packaging shall be be inspected in accordance with the applicable material specification.

4.10.2.2 Preservation Inspection. Inspection of preservation and interior markings shall be in accordance with group A and B Quality Conformance Inspection Requirements of MIL-P-116. Lot information and sampling procedures shall be as specified therein.

4.10.2.3 Packing Inspection. Inspection of packaging and the marking for shipment and storage shall consist of the examinations specified in Table II, "PACKING INSPECTION PROVISIONS". Lot information shall consist of all packs made of the same materials during an identifiable period and submitted at one time for acceptance. Sampling procedures shall be in accordance with MIL-STD-105, using a single sampling plan and Acceptable Quality level of 4.0 percent defective.

Source: https://assist.dla.mil -- Downloaded: 202610-22T19:58Z
Check the source to verify that this is the current version before use.

TABLE II. PACKING INSPECTION PROVISIONS.

NO.	CHARACTERISTIC	METHOD OF INSPECTION
101	Intermediate container not as specified	Visual
102	Improper closure of intermediate container	Visual
103	Shipping containers not in accordance with specification	Visual
104	Excessive cube	Visual
105	Improper blocking and bracing	Visual
106	Closure not in accordance with specification	Visual
107	Weight and size exceed container limitations	Weight & Measure
108	Strapping not in accordance with specification, incorrectly applied, omitted	Visual
109	Marking omitted, incorrect, or illegible	Visual

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

5. PACKAGING.

5.1 Preservation. Preservation shall be as specified in MIL-STD-2073-2, Tables I through VII, coded as follows:

5.1.1 Mounting MT-6232/GRC-193A and MT-6233/GRC-193A.

5.1.1.1 Level A. 1Ø-1-ØØ-00-NS-X-ED.

5.1.1.2 Level B. 1Ø-1-ØØ-00-NS-X-ED.

5.1.2 Cable Assemblies. Unit pack each in accordance with MIL-C-55442.

5.1.3 Consolidation. Place the items, unit packed as specified, within a close-fitting box conforming to PPP-B-636, W5c. Closure shall be in accordance with the appendix of the box specification.

5.2 Packing and Marking. Packing and marking shall be in accordance with MIL-E-55585.

6. NOTES.

6.1 Level A or Level B preservation and packing (see Section 5).

6.2 When the rough handling test is specified in the contract or purchase order (see 4.10).

6.2.1 When first article rough handling tests are not required.

6.2.2 When first article packaging inspection reports required Acquisition Activity approval prior to production unit packing.

6.3 Level B Preservation. When Level B preservation is specified, this level of protection will only be used under known favorable conditions during transportation, storage, and handling.

6.4 Environmental. Environmental pollution prevention measures are contained in the packaging material specifications referenced herein. Refer to material specifications or preparing activity for recommended disposability methods.

6.5. Subject Term (Key Word) Listing.
Distribution Statement A
Mounting
Mounting MT-6232/GRC-193A and Mounting MT-6233/GRC-193A

CUSTODIAN:

ARMY - CR

PREPARING ACTIVITY:

ARMY - CR
(Project 5820-A572)

Source: https://assist.dla.mil -- Downloaded: 2026Ø-22T19:58Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 4966 Alexandria, VA

POSTAGE WILL BE PAID BY

Commander
U.S. Army Communications-Electronics Command
and Fort Monmouth
ATTN: AMSEL-ED-TO
Fort Monmouth, NJ 07703-9990

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE. HISA-FM 149-85

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T19:58Z
Check the source to verify that this is the current version before use.