MILITARY SPECIFICATION

PLOTTER, COMBAT MISSION, PLU-6/C (AIR NAVIGATION)

This specification is approved for use by the Department of the Air Force and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1 1 This specification covers one type of combat mission plotter that is designated PLU-6/C.

2. APPLICABLE DOCUMENTS

2 1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein

SPECIFICATIONS

FEDERAL

L-P-535	Plastic Sheet (Sheeting); Plastic Strip; Vinyl Chloride Polymer and Vinyl Chloride-Vinyl Acetate Copolymer, Rigid
PPP-B-636	Boxes, Shipping, Fiberboard
PPP-F-320	Fiberboard, Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes

MILITARY

MIL-P-116	Preservation-Packaging, Methods of
MIL-B-117	Bags, Sleeves and Tubing - Interior Packaging

STANDARDS

MILITARY

MIL-STD-129	Marking for Shipment and Storage
MIL-STD-794	Parts and Equipment, Procedures for Packaging and Packing

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Aeronautical Systems Division, ASD/ENESS, Wright-Patterson Air Force Base, OH 45433, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appear- at the end of this document or by letter)

FSC 6605

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

(Copies of specifications, standards, drawings, and publications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3 1 First article When specified (see 4.3 and 6.2), the contractor shall furnish samples for first article inspection and approval

3.2 Material. The material for the base and the protective lamination shall be plastic sheeting that conforms to composition B, type I, class 3 of L-P-535 The plastic sheeting for the base shall be 0 055 inch thick The plastic sheeting for the protective lamination shall be 0 005 inch thick.


3 3 Design and construction The plotter shall be a transparent plastic template that consists of a base and a protective lamination The base shall contain the printing specified in 3 3 1 The protective lamination, shall be bonded, over the printed surface of the base, under heat and pressure, to form a homogeneous sheet

3.3.1 Printing. The printing shall be on the underside of the base to avoid parallax. Unless otherwise specified herein, the printing shall be in black and magenta ink on clear plastic in accordance with the master drawing described in 3.6. If the master drawing is not loaned to the contractor by the Government. the printing shall be in black and magenta ink on clear plastic in accordance with 3 3.1.1 through 3.3 1 5 and figures 1 and 2. If the requirements of figures 1 and 2 conflict with the requirements specified in 3.3 1 1 through 3.3.1.5, the requirements of 3 3.1 1 through 3.3.1.5 shall apply

3 3.1.1 Scales Nautical mile scales, time-minutes scales, and time-in-turn scales shall be developed for the plotter in accordance with tables I through XIII. The graduations of these scales shall be substantially in accordance with figure 1 with respect to the length and shall be 0 005 inch wide The letters and the numbers of these scales shall be in 9-point, boldface, Gothic type style.

3.3.1.2 Vertical reference lines. The plotter shall have one major vertical reference line and ten minor vertical reference lines The major vertical reference line shall be 1 750 inches long and shall be a continuation of the 90-degree graduation of the protractor The ten minor vertical reference lines shall be 0.1562 inch long and shall be located at the top and the bottom of the cutouts as follows: 0 3125 inch from the left edge of the upper center cutout, 0.3125 inch from the right edge of the upper right cutout, 0 6250 inch from the right edge of the upper right cutout, 0 6250 inch from the left edge of the lower left cutout, and 0 7187 inch from the right edge of the lower right cutout


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

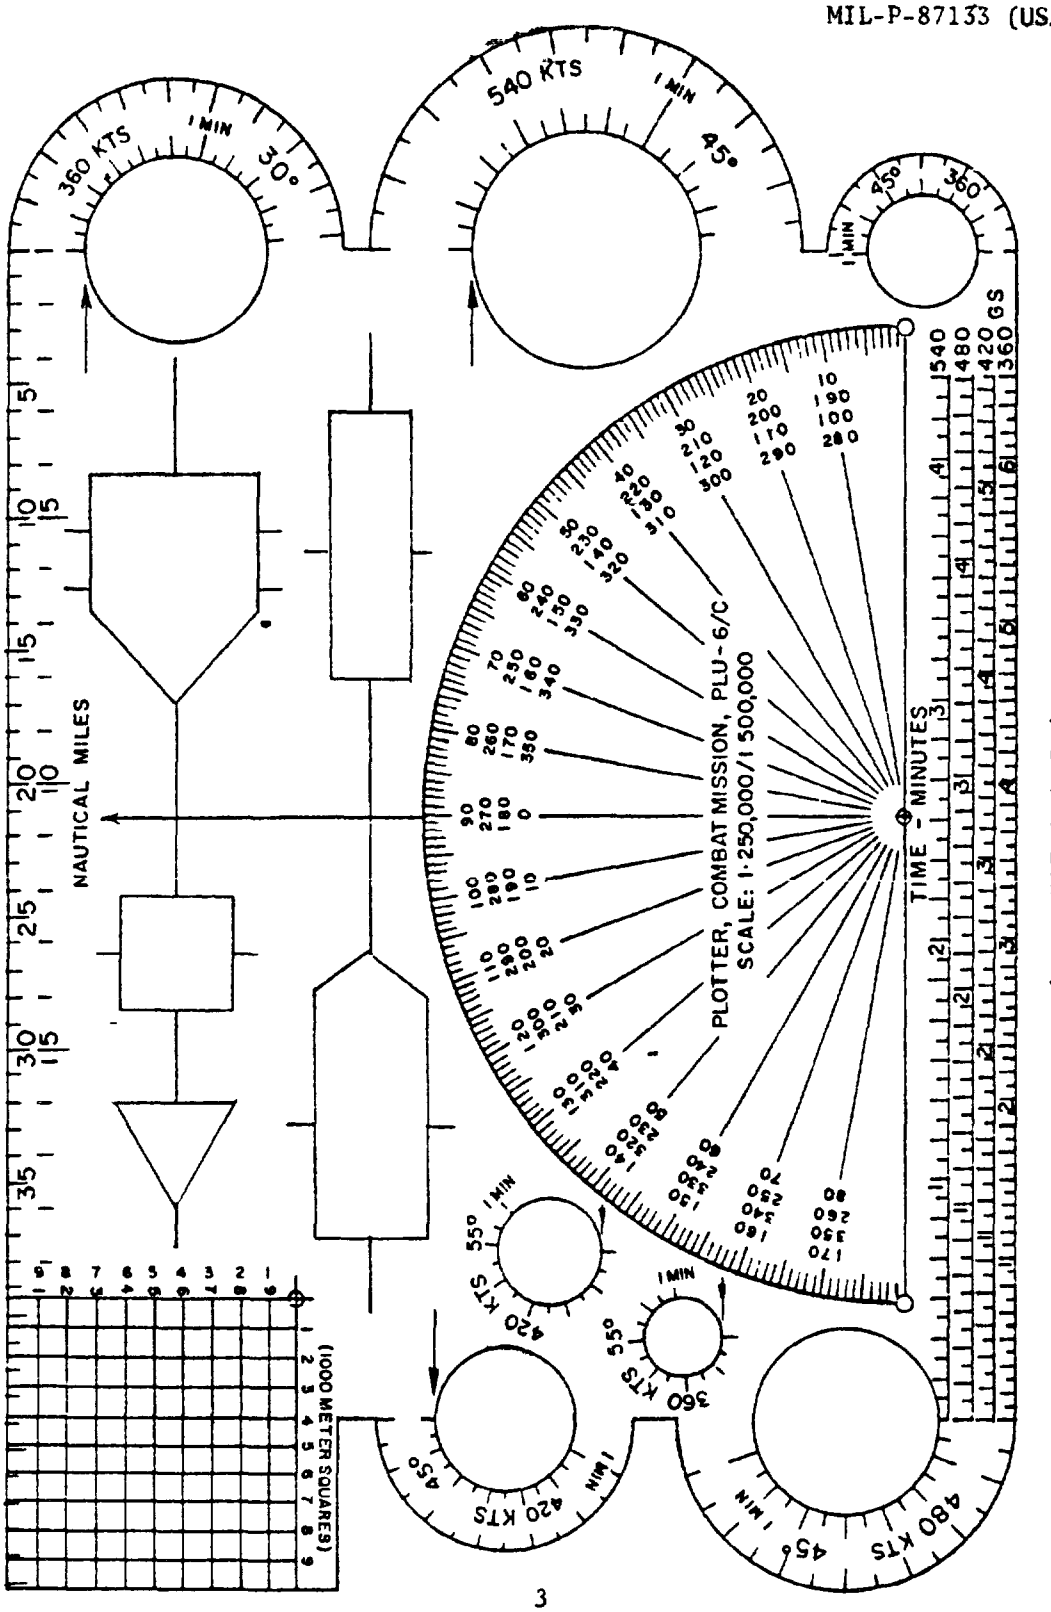

(DO NOT SCALE)

FIGURE 1. Printing.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

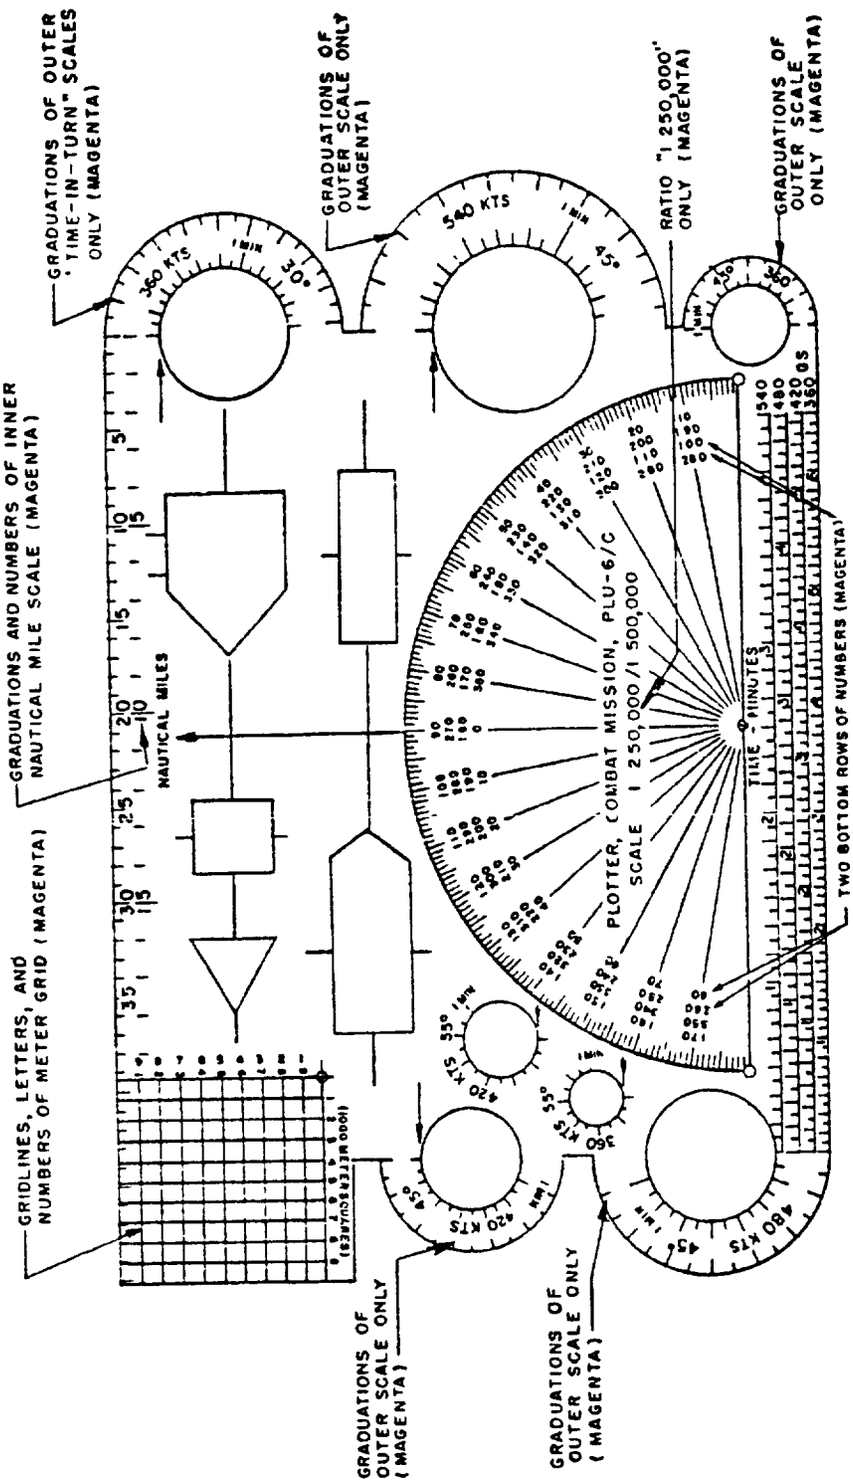

PRINTING IN BLACK EXCEPT WHERE MAGENTA IS SPECIFIED

FIGURE 2. Color layout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

3.3.1.3 Horizontal reference lines. The plotter shall have two horizontal reference lines. The upper horizontal reference line shall be a continuation of the centerline of the upper left and the upper right cutouts and shall extend 0.25 inch beyond the upper left cutout and 0.625 inch beyond the upper right cutout. The lower horizontal reference line shall be a continuation of the centerline of the lower left and the lower right cutouts and shall extend 0.4375 inch beyond the lower left cutout and 0.4375 inch beyond the lower right cutout.

3.3.1.4 Meter grid. The meter grid shall be a 4-centimeter (1.575-inch) square and shall be divided into one-hundred, 4-millimeter squares. The markings of the meter grid shall be in accordance with figure 1. The letters and the numbers for the meter grid shall be 7-point, boldface, Gothic type style.

3.3.1.5 Protractor. The protractor shall be semicircular, shall be 5.340-inch diameter, shall be graduated in degrees, and shall be laid out in accordance with figure 1. The graduations for the protractor shall be 0.005 inch wide. The numbers for the protractor shall be 7-point, boldface, Gothic type style

3.4 Dimensions. The dimensions of the finished plotter shall be in accordance with figure 3.

3.5 Identification of product. The item description (PLOTTER, COMBAT MISSION, PLU-6/C), the manufacturer's part number, and the manufacturer's identification shall be printed on the underside of the base before the protective lamination is bonded to the base.

3.6 Government loaned property. When specified (see 6.2), the Government will loan the contractor the following full-size dimensionally stable (polyester film) master drawing.

Drawing No.	Nomenclature
FAA-215	Plotter, Combat Mission, PLU-6/C.

3.7 Workmanship. The surface and edges of the plotter shall be smooth and uniform. The plotter shall be free from any defects that might adversely affect the serviceability of the plotter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

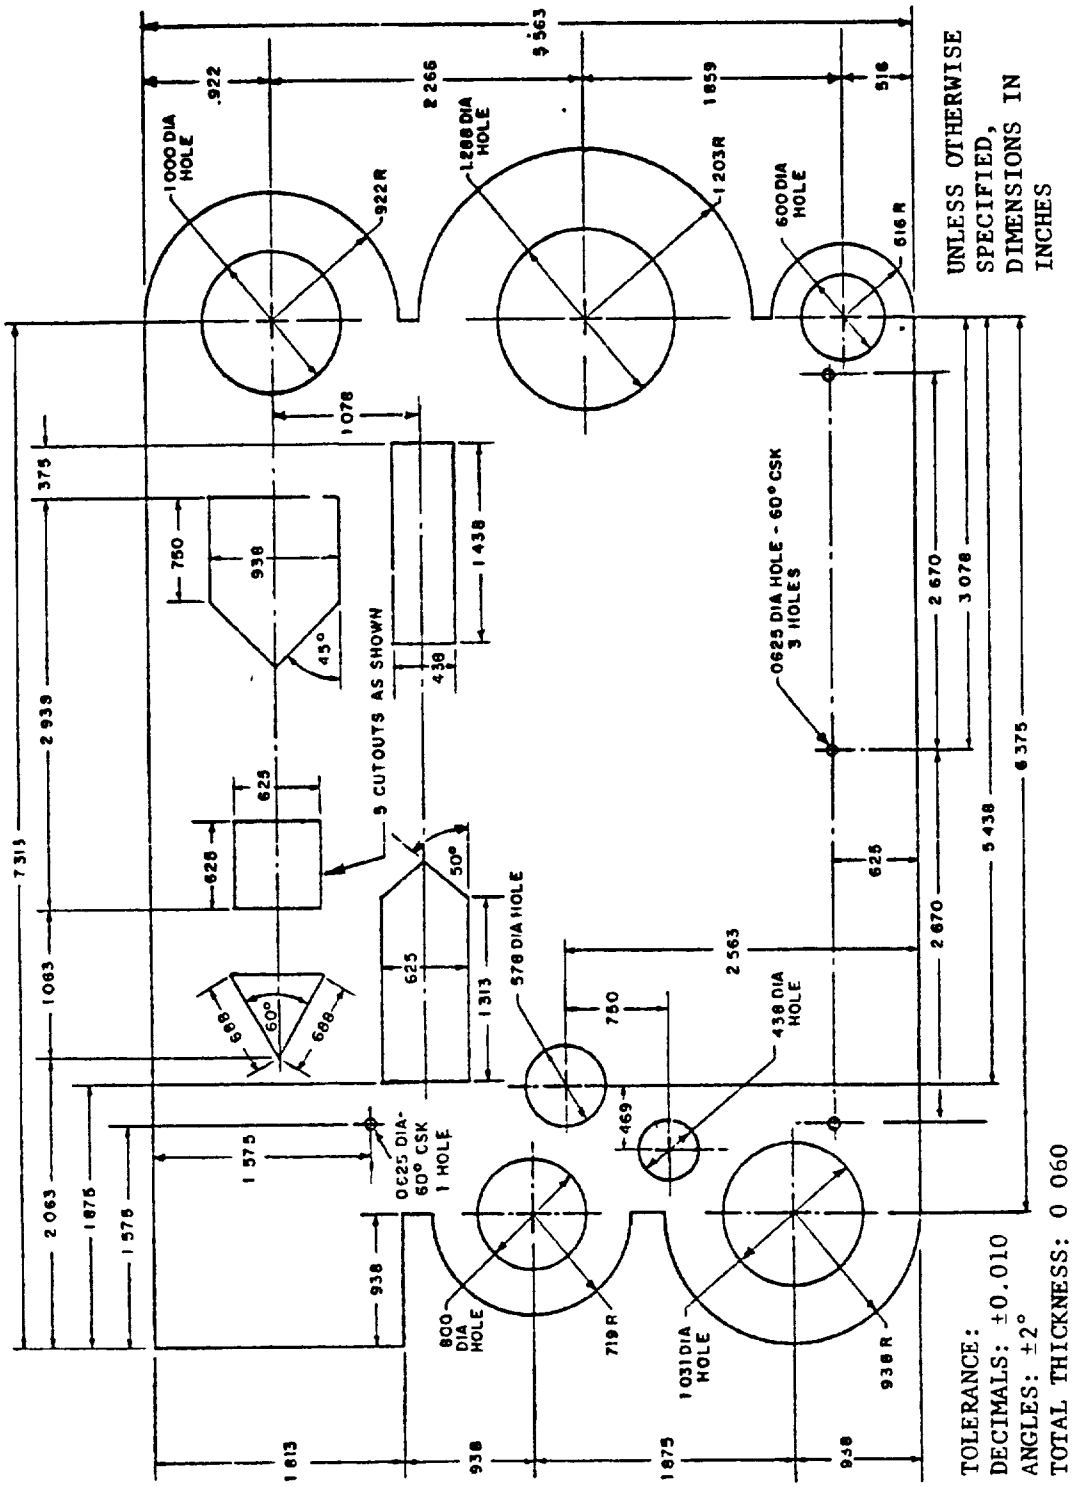


FIGURE 3. Blank layout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Classification of inspections. The inspections required by this specification are classified as follows:

(a) First article inspection

(b) Quality conformance inspection.

4.3 First article inspection. When required (see 3.1 and 6.2), the first article samples shall be inspected to determine compliance with all of the requirements specified in 3.2 through 3.5 and 3.7.

4.3.1 First article samples. The first article samples shall consist of three plotters that are representative of the materials, design, construction, printing. dimensions. and workmanship to be used in the production items. Approval of the first article samples shall not preclude the requirement for the performance of the quality conformance inspection.

4.4 Quality conformance inspection. The quality conformance inspection shall consist of the following.

(a) Individual inspection

(b) Sampling inspection.

4.4.1 Individual inspection. Each plotter shall be subjected to the examination of product described in 4.5.1.

4.4.2 Sampling inspection. One plotter shall be selected at random from each lot of 100 plotters, or fraction thereof, and subjected to the accuracy tests described in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

4 4.2 1 Rejection and retest. If one or more items from a lot fail to meet the specification, acceptance of all items in the lot shall be withheld until the extent and cause of failure have been determined The contractor shall explain fully to the Government representative and notify the procuring activity in writing the cause of failure, the action taken to preclude recurrence, and the impact this failure may have on scheduled deliveries

4 4.2.2 Continuation of inspection For production reasons, individual inspection or other sampling inspections may be continued pending the investigation of a sampling inspection failure Final acceptance of the entire lot or lots produced later shall not be made until it is determined that all items meet the requirements of the specification

4 4 3 Defects in items already accepted The investigation of an inspection failure could indicate that defects may exist in items already accepted If so, the contractor shall fully advise the procuring activity of all defects likely to be found and the method of correcting them

4 5 Inspection methods

4.5 1 Examination of product. The plotter shall be visually examined to determine conformance to the requirements of this specification with respect to materials, design, construction, printing, color, identification of product, and workmanship

4.5.2 Accuracy The plotter shall be inspected for accuracy as specified in tables XIV through XVI. If the location of the graduation on any scale of the plotter is not as specified in tables XIV through XVI, the plotter shall be rejected

4 6 Inspection of packaging. Tests shall be accomplished in accordance with section 4 of MIL-P-116 to insure compliance with the requirements specified in section 5 of this specification

5. PACKAGING

5 1 Preservation-packaging. Preservation-packaging shall be level A or C as specified (see 6.2).

5 1.1 Level A

5 1.1.1 Cleaning. The plotters shall be cleaned in accordance with process C-1 of MIL-P-116

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

5 1 1 2 Drying. The plotters shall be dried in accordance with process D-4 of MIL-P-116

5.1.1.3 Unit packaging Each plotter shall be packaged in quantity unit packs of one each in accordance with method III of MIL-P-116. Each plotter shall be sandwiched between two pieces of fiberboard that conforms to PPP-F-320 and inserted into a bag that conforms to MIL-B-117 The bag shall be placed in a box that conforms to PPP-B-636 and that is of sufficient size to accommodate 25

5.1 2 Level C. The plotters shall be clean, dry, and individually packaged in a manner that will afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity.

5 2 Packing. Packing shall be level A, B, or C as specified (see 6 2)

5 2.1 Level A Plotters that have been packaged as specified in 5 1 1 shall be packed in shipping containers that conform to class weather-resistant of PPP-B-636. Insofar as practical, the exterior shipping containers shall be of uniform shape and size and shall be of minimum tare and cube consistent with the protection required Table II of MIL-STD-794 shall apply for Army use.

5 2 2 Level B. Plotters that have been packaged as specified in 5 1 1 shall be packed as specified in 5 2.1 except that the shipping containers shall conform to class domestic in lieu of class weather-resistant of PPP-B-636.

5.2.3 Level C Plotters shall be packed in a manner that will afford adequate protection during domestic shipment from the supply source to the first receiving activity for immediate use This level shall conform to the rules of carriers and the regulations applicable to the mode of transportation and may be the contractor's commercial practice, provided the latter meets the requirements for this level

5.3 Marking In addition to any special marking required by the contract or order, each unit package, intermediate container, and shipping container shall be marked in accordance with MIL-STD-129

6. NOTES

6 1 Intended use The plotter covered by this specification is intended to be used in the preparation of navigational route strip maps

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

6.2 Ordering data Procurement documents should specify the following·

(a) Title, number, and date of this specification

(b) First article inspection (see 3.1 and 4 3)

(c) Master drawing that is available at Oklahoma City Air Logistics Center (MMEDDE), Tinker Air Force Base, Oklahoma and is to be loaned by the Government (see 3.6)

(d) Selection of applicable levels of preservation-packaging and packing (see 5 1 and 5 2).

6.3 Operational manual. An operational manual for the plotter will not be required.

Custodian:
Air Force - 11

Reviewer:
Air Force - 99

Preparing activity·
Air Force - 11

Project No. 6605-F182

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE I. Outer nautical mile scale (1:500,000).

Nautical Mile	Scale Length in Inches (0.1458 Inch = 1 Nautical Mile)
0	0
1	0.146
2	0.292
3	0.437
4	0.583
5	0.729
6	0.875
7	1.021
8	1.166
9	1.312
10	1 458
11	1.604
12	1.750
13	1.895
14	2.041
15	2.187
16	2.333
17	2.479
18	2.624
19	2.770
20	2.916
21	3.062
22	3.208
23	3.353
24	3.499
25	3.645
26	3.791
27	3.937
28	4.082
29	4.228
30	4.374
31	4.520
32	4.666
33	4.811
34	4.957
35	5.103
36	5.249
37	5.395
38	5.540
39	5.686

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE I. Outer nautical mile scale (1:500,000). - Continued

Nautical Mile	Scale Length in Inches (0.1458 Inch = 1 Nautical Mile)
40	5.832
41	5.978
42	6.124
43	6.269
44	6.415
45	6.561
46	6.707
47	6.853
48	6.998
49	7.144
50	7.290 End Point

TABLE II. Inner nautical mile scale (1:250,000).

Nautical Mile	Scale Length in Inches (0.2916 Inch = 1 Nautical Mile)
0	0
1	0.292
2	0.583
3	0.875
4	1.166
5	1 458
6	1.750
7	2.041
8	2.333
9	2.624
10	2.916
11	3.208
12	3.499
13	3.791
14	4.082
15	4.374
16	4.666
17	4.957
18	5.249
19	5.540 End Point

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE III. Time-minutes scale (360 knots groundspeed).

Time (Minutes:Seconds)	Scale Length in Inches (0.01458 Inch = 1 Second)
0:00	0
0:05	0.073
0:10	0.146
0:15	0.219
0.20	0.292
0.25	0.365
0:30	0.437
0:35	0.510
0:40	0.583
0:45	0.656
0:50	0.729
0.55	0.802
1:00	0.875
1:05	0.948
1:10	1.021
1:15	1.094
1:20	1.166
1:25	1.239
1:30	1.312
1:35	1.385
1:40	1.458
1.45	1.531
1.50	1.604
1:55	1.677
2:00	1.750
2:05	1.823
2:10	1.895
2:15	1.968
2:20	2.041
2:25	2.114
2:30	2.187
2:35	2.260
2:40	2.333
2:45	2.406
2:50	2.479
2:55	2.552
3:00	2.624
3:05	2.697
3:10	2.770

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE III. Time-minutes scale (360 knots groundspeed). - Continued

Time (Minutes:Seconds)	Scale Length in Inches (0.01458 = 1 Second)
3:15	2.843
3 20	2.916
3:25	2.989
3.30	3.062
3:35	3.135
3:40	3.208
3:45	3.281
3:50	3.353
3·55	3.426
4:00	3.499
4:05	3.572
4:10	3.645
4:15	3.718
4:20	3.791
4:25	3.864
4:30	3.937
4·35	4.010
4:40	4.082
4:45	4.155
4:50	4.228
4:55	4.301
5:00	4.374
5:05	4.447
5:10	4.520
5:15	4.593
5:20	4.666
5:25	4.739
5:30	4.811
5:35	4.884
5:40	4.957
5:45	5.030
5:50	5.103
5:55	5.176
6:00	5.249
6:05	5.322
6:10	5.395
6:15	5.468
6:20	5.540
6:25	5.613
6.30	5.686 End Point

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE IV. Time-minutes scale (420 knots groundspeed)

Time (Minutes:Seconds)	Scale Length in Inches (0.0170 = 1 Second)
0:00	0
0:05	0.085
0:10	0.170
0:15	0.255
0:20	0.340
0:25	0.425
0:30	0.510
0:35	0.595
0:40	0.680
0:45	0.765
0.50	0.850
0:55	0.935
1:00	1.020
1:05	1.105
1:10	1.190
1:15	1.275
1.20	1.360
1·25	1.445
1:30	1.530
1:35	1.615
1:40	1.700
1:45	1.785
1:50	1.870
1:55	1.955
2:00	2.040
2:05	2.125
2:10	2.210
2:15	2.295
2:20	2.380
2:25	2.465
2:30	2.550
2:35	2.635
2:40	2.720
2:45	2.805
2:50	2.890
2:55	2.975
3:00	3.060
3·05	3.145

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE IV. Time-minutes scale (420 knots groundspeed). - Continued

Time (Minutes:Seconds)	Scale Length in Inches (0.0170 = 1 Second)
3:10	3.230
3:15	3.315
3:20	3.400
3:25	3.485
3:30	3.570
3:35	3.655
3:40	3.740
3:45	3.825
3:50	3.910
3:55	3.995
4:00	4.080
4:05	4.165
4:10	4.250
4:15	4.335
4:20	4.420
4:25	4.505
4:30	4.590
4:35	4.675
4:40	4.760
4:45	4.845
4:50	4.930
4:55	5.015
5:00	5.100
5:05	5.185
5:10	5.270
5:15	5.355
5:20	5.440
5:25	5.525
5:30	5.610
5:35	5.695 End Point

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE V. Time-minutes scale (480 knots groundspeed).

Time (Minutes:Seconds)	Scale Length in Inches (0.01944 Inch = 1 Second)
0:00	0
0:05	0.097
0:10	0.194
0 15	0.292
0:20	0.389
0:25	0.486
0:30	0.583
0:35	0.680
0:40	0.778
0.45	0.875
0:50	0.972
0:55	1.069
1:00	1.167
1:05	1.264
1:10	1.361
1:15	1.458
1:20	1.555
1:25	1.652
1:30	1.749
1:35	1.847
1:40	1.944
1 45	2.041
1:50	2.138
1:55	2.236
2:00	2.333
2:05	2.430
2:10	2.527
2:15	2.624
2:20	2.721
2·25	2.818
2:30	2.916
2:35	3.013
2:40	3.110
2:45	3.203
2.50	3.305
2·55	3.402
3:00	3.499
3:05	3.596

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE V Time-minutes scale (480 knots groundspeed). - Continued

Time (Minutes:Seconds)	Scale Length in Inches (0.01944 Inch = 1 Second)
3·10	3.694
3:15	3.791
3:20	3.888
3:25	3.985
3·30	4.082
3:35	4.179
3:40	4.277
3:45	4.374
3:50	4.471
3·55	4.568
4·00	4.666
4:05	4.763
4:10	4.860
4:15	4.957
4.20	5.054
4:25	5.152
4:30	5.249
4·35	5.346
4:40	5.443
4:45	5.540
4:50	5.638 End Point

TABLE VI Time-minutes scale (540 knots groundspeed).

Time (Minutes:Seconds)	Scale Length in Inches (0.02187 Inch = 1 Second)
0:00	0
0·05	0.109
0:10	0.219
0:15	0.328
0:20	0.437
0 25	0.547
0:30	0.656
0:35	0.765
0·40	0.875
0·45	0.984
0:50	1.094
0·55	1.203
1·00	1.312

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE VI. Time-minutes scale (540 knots groundspeed) - Continued

Time (Minutes:Seconds)	Scale Length in Inches (0.02187 Inch = 1 Second)
1:05	1.422
1:10	1.531
1:15	1.640
1:20	1.750
1:25	1.859
1:30	1.968
1:35	2.077
1:40	2.187
1:45	2.296
1:50	2.406
1:55	2.515
2:00	2.624
2:05	2.734
2:10	2.843
2:15	2.952
2:20	3.062
2:25	3.171
2:30	3.281
2:35	3.390
2:40	3.499
2:45	3.609
2:50	3.718
2:55	3.827
3:00	3.937
3:05	4.046
3:10	4.155
3:15	4.264
3:20	4.374
3:25	4.483
3:30	4.593
3:35	4.702
3:40	4.811
3:45	4.921
3:50	5.030
3:55	5.139
4:00	5.249
4:05	5.358
4:10	5.468
4:15	5.577
4:20	5.686 End Point

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE VII. Time-in-turn scale (360 knots, 30-degree bank).

Time in Turn (Seconds)	Degrees Measured Clockwise (1.75 Degrees = 1 Second)
0	0
5	8.75
10	17.50
15	26.25
20	35.00
25	43.75
30	52.50
35	61.25
40	70.00
45	78.75
50	87.50
55	96.25
60	105.00
65	113.75
70	122.50
75	131.25
80	140 00
85	148.75
90	157.50
95	166.25
100	175.00

TABLE VIII. Time-in-turn scale (540 knots, 45-degree bank).

Time in Turn (Seconds)	Degrees Measured Clockwise (2.025 Degrees = 1 Second)
0	0
5	10.125
10	20.250
15	30.375
20	40.500
25	50.625
30	60.750
35	70.875
40	81.000
45	91.125
50	101.250
55	111.375
60	121.500
65	131.625

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE VIII. Time-in-turn scale (540 knots, 45-degree bank).- Continued

Time in Turn (Seconds)	Degrees Measured Clockwise (2.025 Degrees = 1 Second)
70	141.750
75	151.875
80	162.000
85	172.125
90	182.250

TABLE IX. Time-in-turn scale (360 knots, 45-degree bank).

Time in Turn (Seconds)	Degrees Measured Counterclockwise (3.033 Degrees = 1 Second)
0	0
5	15.17
10	30.33
15	45.50
20	60.66
25	75.83
30	91.00
35	106.16
40	121.32
45	136.49
50	151.65
55	166.82
60	182.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE X. Time-in-turn scale (480 knots, 45-degree bank)

Time in Turn (Seconds)	Degrees Measured Clockwise (2.275 Degrees = 1 Second)
0	0
5	11.375
10	22.750
15	34.125
20	45.500
25	56.875
30	68.250
35	79.625
40	91.000
45	102.375
50	113.750
55	125.125
60	136.500
65	147.875
70	159.250

TABLE XI. Time-in-turn scale (420 knots, 45-degree bank).

Time in Turn (Seconds)	Degrees Measured Counterclockwise (2.60 Degrees = 1 Second)
0	0
5	13.0
10	26.0
15	39.0
20	52.0
25	65.0
30	78.0
35	91 0
40	104 0
45	117.0
50	130.0
55	143.0
60	156.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE XII. Time-in-turn scale (360 knots, 55-degree bank).

Time in Turn (Seconds)	Degrees Measured Clockwise (4.35 Degrees = 1 Second)
0	0
5	21.75
10	43.50
15	65.25
20	87.00
25	108.75
30	130.50
35	152.25
40	174.00
45	195.75
50	217.50
55	239.25
60	261.00

TABLE XIII. Time-in-turn scale (420 knots, 55-degree bank).

Time in Turn (Seconds)	Degrees Measured Clockwise (3.70 Degrees = 1 Second)
0	0
5	18.50
10	37.00
15	55.50
20	74.00
25	92.50
30	111.00
35	129.50
40	148.00
45	166.50
50	185.00
55	203.50
60	222.00

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

TABLE XIV. Accuracy of nautical mile scales.

Nautical Mile Scales	Graduations	Location in Inches from Zero Index (Plus or Minus 0.01)
Outer (1:500,000)	35 nautical miles	5.10
Inner (1:250,000)	10 nautical miles	2.92

TABLE XV. Accuracy of time-minutes scales.

Time-Minutes Scales	Graduations	Location in Inches from Zero Index (Plus or Minus 0.01)
360 knots groundspeed	4 minutes	3.50
420 knots groundspeed	4 minutes	4.08
480 knots groundspeed	4 minutes	4.67
540 knots groundspeed	4 minutes	5.25

TABLE XVI. Accuracy of time-in-turn scales.

Time-in-Turn Scales	Graduations	Location in Degrees from Zero Index (Plus or Minus 0.25)
360 knots, 30-degree bank	1 minute	105.0 clockwise
540 knots, 45-degree bank	1 minute	121.5 clockwise
360 knots, 45-degree bank	1 minute	182.0 counterclockwise
480 knots, 45-degree bank	1 minute	136.5 clockwise
420 knots, 45-degree bank	1 minute	156.0 counterclockwise
360 knots, 55-degree bank	1 minute	261.0 clockwise
420 knots, 55-degree bank	1 minute	222.0 clockwise

☆U.S. GOVERNMENT PRINTING OFFICE 1978 — 703-122/2571

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

FOLD

ASD/ENESS
Wright-Patterson AFB, O 45433

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

POSTAGE AND FEES PAID
DEPARTMENT OF AIR FORCE
DOD-316



ASD/ENESS
Wright-Patterson AFB, O 45433

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS This form is provided to solicit beneficial comments which may improve this document and enhance its use DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government Fold on lines on reverse side, staple in corner, and send to preparing activity Attach any pertinent data which may be of use in improving this document If there are additional papers, attach to form and place both in an envelope addressed to preparing activity A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed

NOTE This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements

DOCUMENT IDENTIFIER *(Number)* AND TITLE

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1 ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW

A GIVE PARAGRAPH NUMBER AND WORDING

B RECOMMENDED WORDING CHANGE

C REASON FOR RECOMMENDED CHANGE(S)

2 REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1 OCT 76 1426 PREVIOUS EDITION WILL BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T11:51Z
Check the source to verify that this is the current version before use.