NOT MEASUREMENT SENSITIVE

MIL-STD-35-108A (MI)
21 MAY 1993
SUPERSEDING
MIL-STD-35-108 (MI)
30 JUNE 1976

MILITARY STANDARD

AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEM

TRANSMITTERS

AMSC N/A **AREA EGDS**

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Single User - assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

FOREWARD

1. This Military Standard is approved for use by all Departments and Agencies of the Department of Defense.

2. Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to Commander, U.S. Army Missile Research and Development Command, ATTN: AMSMI-RD-SE-TD, Redstone Arsenal, Alabama 35809, by using the Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

3. The purpose of MIL-STD-35-108A(M1) is to provide instructions for the preparation of Specification Requirements Sheets (SRS) in order to produce Military Specification Exceptions for Transmitters.

4. In order to properly utilize this document, it is necessary to have a complete and thorough understanding of the MIL-STD-35.

5. It is important that the procedures described in the basic document (MIL-STD-35 and subsequent revisions) be followed explicitly in order to produce a document suitable for procurement. Information which is standard for all dash-numbered parts has been included in the basic document at the issuance of MIL-STD-35. This information is not repeated in each dash-numbered part.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

			Page
Paragraph	1.	SCOPE	1
	1.1	General	1
	1.2	Purpose	1
	1.3	Utilization	1
	1.4	Military Specification Exception Title. Index	1
	2.	APPLICABLE DOCUMENTS	6
	2.1	Government documents	5
	2.1.1	Specifications, Standards and Handbooks	6
	2.2	Non-Government publications	7
	2.3	Order of Precedence	7
	3	DEFINITIONS	8
	4.	GENERAL REQUIREMENTS	9
	4.1	Introduction	9
	4.2	Specification Requirement Sheet (SRS)	9
	4.3	Configuration	9
	4.3.1	Dimensions	9
	4.3.2	Illustrations	9
	4.4	Units of measure	9
	5.	DETAILED REQUIREMENTS	10
	5.1	Introduction	10
	5.2	MSE Formats	10
	5.3	Referenced documents	10
	5.4	Tabulation	10
	5.5	Keyword Code Index (KCI) and Standard Paragraphs	11
	5.5.1	Interrelationship of Codes	11
	5.5.2	Automatic MSE Data	11
	5.5.3	MIL-STD-35 Tables	11

TABLES

Table	I.	Title Index	2
	II.	Tabulation candidates	10

APPENDICES

Appendix	A.	Illustrations	184
	B.	Characteristic Code Index	189
		Index	199

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

1. SCOPE

1.1 General. This dash-numbered part of the Automated Engineering Document Preparation System (AEDPS), provides detailed requirements for the preparation of Military Specification Exception (MSE) documentation for Transmitters.

1.2 Purpose. This military standard provides the necessary information to prepare a Specification Requirement Sheet (SRS) which will be used to generate an MSE by automated data processing.

1.3 Utilization. General instructions, quality assurance provisions, packaging, and notes, applicable to all AEDPS dash-numbered parts have been included in the basic document (MIL-STD-35) to avoid redundancy. Unless otherwise specified in this dash-numbered part, the following list contains additional subjects that are applicable to all AEDPS dash-numbered parts and are included in MIL-STD-35:

a. Writing Methodology
b. Document and Part Numbering
c. Applicable Documents
d. Single and Multi-item Specifications (Tabulation)
e. Keyword Code Index (KCI)
f. General Requirements of AEDPS

1.4 Military Specification Exception Title Index. The title code for an MSE shall be selected from one of the MSE titles listed in the Title Index (see table I). Data bases have been established for the generation of MSE'S for the MSE titles indicated. If a suitable title code is not contained in the Title Index, leave the title code spaces on the SRS blank, and attach a request for the assignment of a title code. Include in the request the desired title and the base document identifier. A code will be assigned and the code, title, and base document will be made a part of the Title Index.

One of the six-digit codes listed in the Title Index, entered on an SRS, will specify that the title of the MSE will be the title shown in the Title Index.

Each MSE title listed in the Title Index is compatible with the document(s) listed with that title under base document. The list of base documents may or may not be a complete listing. The information shown under coverage is intended for the user's reference; when more than one document is listed for an MSE title, this information will be found useful in determining which of the documents is most suitable for use as the base document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

The MSE title may or may not be the same as the title used in the DODISS, FIIG, or the base document. In general, the MSE title uses the basic federal item name listed in Cataloging Handbook H6. However, titles with additional modifying and identifying words are provided to assist in defining the scope of the MSE. Also, less restrictive titles are provided to prevent exclusion of items.

TABLE 1 TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT	
		NUMBER	COVERAGE
BEACON SET, RADIO	089001	MIL-T-23449 MIL-B-38401	AN/PRT-5 AN/URT-33
TRANSMITTER, COUNTERMEASURES	089002	MIL-T-70835	11784701
TRANSMITTING SET, COUNTERMEASURES	089003	MIL-T-49363 MIL-T-49364 MIL-R-5532 MIL-R-23864	TS-3614 TS-3615 AN/APX-7 AN/DPN-77
TRANSMITTER, DIGITAL DATA, AIRBORNE	089004	MIL-T-85375 MIL-T-81695 MIL-T-24015	TELEMETRY AN/AKT-22(V)(U) AN/AKT-21
TRANSMITTING SET, ELECTRONIC GUIDANCE SIGNALS	089005	MIL-T-23369	TELEMETRIC OA, 1208
TRANSMITTER GROUP	089006	MIL-T-28783 MIL-T-28784	AN/FRT-84B(V) AN/FRT-85(V)
TRANSMITTER, RADAR	089007	MIL-B-81856 MIL-B-23431	AN/APN-202 AN/APN-154(V)
TRANSMITTER SET, RADAR, AIRBORNE	089008	MIL-N-23129 MIL-R-81858	AN/PRN-82 AN/APS-115B AND AN/APS-122

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE I. TITLE INDEX

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TRANSMITTER SET, RADAR, AIRBORNE (CONT)	089008 (CONT)	MIL-F-81898	AN/APQ-126
		MIL-R-81648	AN/APS-116
		MIL-R-7957	AN/APS-45A
		MIL-N-23407	AN/APN-1553(V)
		MIL-N-81460	AN/APA-130A
		MIL-N-49096	AN/ASN-128
		MIL-N-49098	AN/ASN128 ( ) (XF-2)
		MIL-N-58107	AN/ASN-137
		MIL-R-5169	AN/APA-62
		MIL-R-8103	AN/APN-81
TRANSMITTING SET, RADAR	089009	MIL-R-16180	AN/TPS-15A
		MIL-R-0015895	AN/TPS-l-D AND AN/TPS-l-E
		MIL-R-7724	AN/APS-33, AN/APS-33A AN/APS-33C,AN/APS-33D AND AN/APS-33F
		MIL-R-49126	AN/PPS-15 ( )
		MIL-R-55348	AN/PPS-5B
TRANSMITTER, RADIO	089010	MIL-T-9663	OA-1448 ( )/GRT
		MIL-T-23645	T-827 ( )/URT
		MIL-T-23449	AN/PRT-5
		MIL-T-28706	AN/URT-23 ( )
		MIL-T-81435	RT-859 ( )/APX-72
TRANSMITTING, SET RADIO	089011	MIL-R-15723	TCB ( )
		MIL-R-10174	T-14 ( )/TRC-1, R-19 ( )/TRC-l
		MIL-R-55444	SQUAD
		MIL-T-10847	TR-111 ( )/TRC-20
		MIL-R-55242	AN/GRC-109
		MIL-R-55656	AN/GRC-103 ( )(V (BASIC)
		MIL-R-55238	AN/GRC-106

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:02Z
Check the source to verify that this is the currentversion before use.

TABLE 1 TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TRANSMITTING SET, RADIO (CONT)	089011 (CONT)	MIL-R-55219	AN/GRC-50(V)
		MIL-R-29887	GROUP VLF, LF, MF, AND HF
		MIL-R-28707	AN/URC-35
		MIL-R-28848	AN/URC-94 (V)
		MIL-R-55698	OA-1387 ( )/GRC
		MIL-R-15972	AN/MRC-5 ( )
		MIL-R-85664	RT-1250A/ARC
		MIL-R-85665	RT-132A/ARC, RT-1327A/ARC AND RT-1407/ARC
		MIL-R-81443	RT-793/ASQ AND RT-793A/ASQ
		MIL-R-55662	AN/ARC-114 ( )
		MIL-R-55663	AN/ARC-13
		MIL-R-81627	AN/ARC-142
		MIL-R-81628	AN/ARC-143B
		MIL-R-81686	AN/ARC-161
		MIL-R-18173	AN/ARC-38
		MIL-R-81876	AN/APX-100
		MIL-R-91877	AN/ARC-159 AND AN/ARC-159 (V)
		MIL-R-22678	RT-542/ASQ AND TR-52A/ASQ
		MIL-R-22659	AN/ARC-51A, AN/ARC-51B, AN/ARC-51AX AND AN/ARC-51BX
		MIL-R-9038	AN/URW-3
		MIL-R-28713	AN/PRAC-96 ( )
		MIL-R-15774	VHF, PORTABLE
		MIL-R-29418	AN/PRC-104 (V)
		MIL-R-49304	AN/PRC-126
		MIL-R-82196	AN/PRC-75B
		MIL-R-29401	AN/PRC-68A
		MIL-R-24182	AN/SRC-20A AND AN/SRC-21A (INCLUDING AN/URC-9 AND C-3866-SRC)
		MIL-R-55002	AN/VRC-24 AND C-1439 ( )/U

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

TABLE 1 TITLE INDEX.

MSE TITLE	TITLE CODE	BASE DOCUMENT NUMBER	BASE DOCUMENT COVERAGE
TRANSMITTING SET, RADIO (CONT)	089011 (CONT)	MIL-T-19835	RADIO SET
		MIL-R-55100	RT-246 ( )/VRC AND RT-524 ( )/VRC
		MIL-R-29421	RT-1209/URC
		MIL-R-22762	RT-546/ASQ-19, TR-546A/ASQ-19, RT-853/ASQ-19 AND RT-546B/ASQ-19
		MIL-R-22679	RT-559/ASQ-58 AND RT559A/ASQ-58
		MIL-R-23016	AN/ARC-94
		MIL-R-27255	AN/ARC-63
		MIL-R-8214	AN/RC-3A
		MIL-R-38503	AN/MRC-113
		MIL-R-49118	AN/PRC-70
		MIL-R-55499	AN/PRC-77
		MIL-R-81493	AN/PRC-90
		MIL-R-28812	AN/SRC-23A
		MIL-R-29533	AN/URC-( )
TRANSMITTING SET, TELEMETRIC DATA, AIRBORN	089013	MIL-T-9334	AN/AKT-13
		MIL-T-85663	AN/AKT-22 (V) 6
		MIL-T-85595	AN/DKT-61 (V)
		MIL-T-24015	AN/AKT-21
TRANSMITTER, TELEVISION, AIRBORNE	089014	MIL-T-23369	TELEMETRIC OA, 1208
TRANSMITTER, TELEVISION	089015	MIL-T-28849	VHF/UHF
TRANSMITTING SET TELEVISION,AIRBORNE	089016	MIL-T-16639	SURVEILLANCE TRANSCEIVER
		MIL-T-29516	
TRANSMITTING SET, TELEVISION	089016	MIL-T-22309	CIC DATA PICKUP AND DISTRIBUTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

MILITARY

MIL-E-16400	Electronic Equipment, Naval Ship and Shore, General Specification
MIL-E-5400	Electronic Equipment, Airborne, General Specification for
MIL-T-19835	Transmitting Set, Radio
MIL-T-23369	Transmitter Group, Telemetric Data, 0-1208 ( )/DPN
MIL-T-23645	Transmitter,T-827( )/URT
MIL-T-24015	Transmitting Set, Telemetry Data, AN/AKT-21
MIL-T-24038	Transmitter, Radio AN/URT-24( )
MIL-T-28706	Transmitter, Radio AN/URT-23(V)
MIL-T-28783	Transmitter, Radio, AN/FRT-84(V)
MIL-T-28784	Transmitter, Radio, AN/FRT-85(V)
MIL-T-55237	Transmitter, Radio, T-749 ( )/FPN-49

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-202	Test Methods for Electronic and Electrical Component Parts
MIL-STD-461	Electromagnetic Interference Characteristics Requirements for Equipment
MIL-STD-462	Electromagnetic Interference Characteristics, Measurement of
MIL-STD-810	Environmental Test Methods

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Bldg 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following document(s) form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation.

ASTM E 380	Metric Practice Guide

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

2.3 Order of Precedence. In the event of conflict between the text of this standard and the reference cited herein, the text of this standard shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

3. DEFINITIONS

3.1 Definitions. Definitions contained in MIL-STD-35 are applicable to Transmitters.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

4. GENERAL REQUIREMENTS

4.1 Introduction. In order to properly prepare an SRS for transmitters, it is necessary to use MIL-STD-35 in conjunction with this dash-numbered part. In the event the instructions or the writing methodology are not followed, an AEDPS edit routine will print error messages rather than the desired MSE document.

4.2 Specification Requirement Sheet (SRS). SRS requirements described in MIL-STD-35 are applicable to Transmitters.

4.3 Configuration.

4.3.1 Dimensions. SRS requirements for dimensions, described in MIL-STD-35 are applicable to transmitters.

4.3.2 Illustrations. Illustrations, applicable to transmitters are contained in Appendix A to this document.

4.4 Units of Measure. The International System of Units (SI) or inch-pound units (U.S.), may be used to specify characteristics (e.g. weight, dimensions). Refer to ASTM E 380 for guidance in using SI However, when different units of measure are available for specifying a characteristic, only one may be used. Both units of measure cannot appear in the same MSE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5. DETAILED REQUIREMENTS

5.1 Introduction. This section provides instructions for completion of the SRS and references for instructions on specific requirements contained in MIL-STD-35.

5.2 MSE Formats. AEDPS has the capability to prepare a six-section or a single section document. The six-section document appears similar to a six-section military specification. The single-section document appears similar to a military specification sheet. Specification requirements described in MIL-STD-35 are applicable to either of the formats selected. It is mandatory that one of the two following codes and an "X" be entered on the SRS to create the desired MSE format:

a. 0700 for a six-section format
b. 0800 for a single-section format

5.3 Referenced Documents. Section 2 of the MSE may contain a list of all referenced documents within Section 3, 4, and 5 in the MSE. Instructions for referencing documents to appear in Section 2 of the forthcoming MSE are contained in MIL-STD-35.

5.4 Tabulation. Instruction for tabulation are provided in MIL-STD-35. When different units of measure within one system (U.S. or SI) are available for specifying a characteristic, only one of the units may be tabulated; e.g. either ounces or pounds.

TABLE II. TABULATION CANDIDATES

CODE 1562	COLUMN HEADING FREQUENCY LWR LIMIT (KILOHZ)	CODE 1563	COLUMN HEADING FREQUENCY UPR LIMIT (KILOHZ)	CODE 1564	COLUMN HEADING FREQUENCY LWR LIMIT (MEGAHZ)
1565	FREQUENCY UPR LIMIT (MEGAHZ)	1700	FREQUENCY MAXIMUM (MEGAHZ)	7022	WEIGHT MAXIMUM (OUNCE)
7023	WEIGHT MAXIMUM (POUND)	7021	WEIGHT MAXIMUM (GRAM)	7024	WEIGHT MAXIMUM (KILOGRAM)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

5.5 Keyword Code Index (KCI) and Standard Paragraphs. The KCI provides codes, to be entered on an SRS that are unique for the type part covered by this dash-numbered part of MIL-STD-35. The left hand page presents the information in outline form using keywords and codes. The right hand page presents the words that will appear in the MSE. To find the code to be entered on the SRS, find the subject in the index at the back of this dash-numbered part. Find the keyword o the KCI and it's associated code. Enter, on the SRS, the code and the characteristic value required. After the part-s unique characteristics have been specified, refer to MIL-STD-35 on how to enter any type characteristic value. Appendix B, Characteristic Code Index, provides a numerical list of codes used in this dash-numbered part. This index identifies the location of codes by page number.

5.5.1 Interrelationship of Codes. The interrelationship of the codes is shown by the indentation level of characteristic names on the KCI. The kind of characteristic value is shown by a colon, parenthesis, period, or underline. The standard paragraph, of which the code is a part, is shown adjacent to the code on the right hand page. When a characteristic value, entered with a code, becomes part of the paragraph, the code is shown in the paragraph where the characteristic value will print. The MSE will contain the exact characteristic value entry, as supplied with the code, except for "X" entries.

5.5.2 Automatic MSE Data. Some statements, such as Altitude and Temperature, will appear in the printed MSE without making additional entries. These statements are linked by data base logic to characteristic codes listed under them and will print when one of the codes listed is used. Other statements may print automatically depending on the type MSE selected. Explanations are noted on the KCI as required.

5.5.3 MIL-STD-35 Tables. The KCI of this document contains reference to tables in MIL-STD-35. Refer to MIL-STD-35 for general explanation in the generation of tables.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
*REQUESTER'S	0101
*COMPANY NAME/COMMAND	0102
*STREET/BUILDING	0103
*CITY, STATE, ZIP	0104
*PHONE NUMBER, INCLUDE AREA CODE, AUTOVON IF APPLICABLE	0105
* DATE	1003
*REQUESTER CAGE	1004
*CONTRACT NUMBER/OFFICE SYMBOL	1005
*BASE DOCUMENT	1006
*SYSTEM APPLICATION	1008
*GOVERNMENT DESIGN ACTIVITY CAGE	6369
*FORMAT (SELECT ONE)	
SIX SECTION DOCUMENT.	0700
ONE SECTION DOCUMENT.	0800
*CONTROL (SELECT ONE)	
SOURCE.	6873

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
0101	0101.
0102	0102.
0103	0103.
0104	0104.
0105	0105.
1003	1003.
1004	USER(S) CAGE(S) 1004.
1005	CONTRACT NUMBER OR OFFICE SYMBOL 1005.
1006	THE COMPLETE REQUIREMENTS FOR PROCURING THE ITEM(S) DESCRIBED HEREIN SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT(S), 1006, EXCEPT AS SPECIFIED IN THIS DOCUMENT. IN THE EVENT OF CONFLICT, THIS DOCUMENT SHALL GOVERN.
1008	SYSTEM APPLICATION 1008.
6369	GOVERNMENT DESIGN ACTIVITY CAGE 3669.
0700	
0800	
	SOURCE(S).
6873	THE FOLLOWING SOURCE(S) SHOWN WITH THE PART NUMBER(S) IS/ARE THE ONLY APPROVED SOURCE(S) FOR THE ITEM(S) DESCRIBED BY THIS DOCUMENT. IDENTIFICATION OF THE APPROVED SOURCE(S) HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM DESCRIBED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONTROL (CONT)	
SPECIFICATION.	6874
*SOURCE TABLE	
NOTE: REFER TO TABLE V OF MIL-STD-35.	
APERTURE CARDS REQUIRED.	0107
REVISION OF AEDPS DOCUMENT (NUMBER)	0108
SCOPE	
NOTE: THIS ENTRY IS AUTOMATIC AND DETERMINED BY THE TITLE CODE USED.	
PART NUMBER	
NOTE: AUTOMATIC WITH A SINGLE ITEM MSE.	
NOTE: AUTOMATIC WITH A MULTI-ITEM MSE.	
CLASSIFICATION	
(STYLE)	1576
CHARACTERISTIC (SYMBOL)	1586

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6874	THE FOLLOWING SUGGESTED SOURCE(S) SHOWN WITH THEIR PART NUMBER(S) HAVE BEEN KNOWN TO MEET THE REQUIREMENT(S) OF THIS DOCUMENT. IDENTIFICATION OF THE 'SUGGESTED SOURCE(S) OF SUPPLY' HEREIN IS NOT TO BE CONSTRUED AS A GUARANTEE OF PRESENT OR CONTINUED AVAILABILITY AS A SOURCE OF SUPPLY FOR THE ITEM(S).
0107	
0108	0108. SCOPE. SCOPE. THIS DOCUMENT COVERS THE DETAILED REQUIREMENTS FOR TITLE CODE. PART NUMBER. THE PART NUMBER FOR THE ITEM IS SUPPLIED BY COMPUTER. PART NUMBER. THE PART NUMBER FOR THE ITEMS IS THE SAME AS THE NUMBER OF THIS DOCUMENT PLUS THE SUFFIX NUMBER FROM THE TABULATED CHARACTERISTIC TABLE. REVISION AND ACTIVITY SYMBOLS ARE NOT INCLUDED IN THE PART NUMBER. CLASSIFICATION.
1576	STYLE. "THE STYLE SHALL BE 1576.
1586	CHARACTERISTIC. THE CHARACTERISTIC SYMBOL SHALL BE 1586.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
UNITS OF MEASURE (SELECT ONE)	
U.S.	6941
SI.	6942
ELECTRICAL RATINGS	
POWER (WATTS)	1571
*AMBIENT TEMPERATURE (DEGREES CELSIUS)	1572
DERATE TO ZERO WATTS AT (DEGREES CELSIUS)	1573
MAXIMUM VOLTAGE (SELECT ONE)	
(VOLTS AC)	1806
(VOLTS DC)	1808
(VOLTS DC OR RMS)	1807
MAXIMUM DISTRIBUTED CAPACTITANCE (PICOFARDS)	1766
MAXIMUM CURRENT (AMPERES)	2350
MUMAIMUN FREQUENCY (MEGAHERTZ)	1700
MAXIMUM PERMEABILITY (MU)	1694

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6941	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INCH-POUND UNITS (U.S.) OR DEGRESS.
6942	UNIT OF MEASURE. ALL UNITS OF MEASURE ARE IN INTER-NATIONAL SYSTEM OF UNITS (SI) OR DEGREES.
1571	POWER RATING. THE POWER RATING SHALL BE 1571 WATT(S).
1572	THE AMBIENT TEMPERATURE SHALL BE 1572 DEGREES CELSIUS.
1573	POWER IS DERATED LINEARLY TO ZERO AT 1573 DEGREES CELSIUS.
1806	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1806 VOLT(S) AC.
1808	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1808 VOLT(S) DC.
1807	VOLTAGE RATING. THE MAXIMUM CONTINUOUS WORKING VOLTAGE SHALL BE 1807 VOLT(S) DC OR RMS.
1766	DISTRIBUTED CAPACITANCE. THE DISTRIBUTED CAPACITANCE SHALL BE NOT GREATER THAN 1766 PICOFARAD(S).
2350	CURRENT RATING. THE MAXIMUM CONTINUOUS CURRENT SHALL BE 2350 AMPERE(S).
1700	FREQUENCY RATING. THE FREQUENCY AT WHICH THE IMPEDANCE DIFFERS FROM THE RESISTANCE BY MORE THAN THE TOLERANCE SHALL BE NOT LESS THAN 1700 MEGAHERTZ.
1694	PERMEABILITY RATING. THE INITAL RELATIVE PERMEABILITY SHALL BE NOT GREATER THAN 1694 MU.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE RATING	
OPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5060
SEA LEVEL TO (METERS)	5061
NONOPERATING (SELECT ONE)	
SEA LEVEL TO (FEET)	5062
SEA LEVEL TO (METERS)	5063
TEMPERATURE RATING	
MAXIMUM OPERATING (DEGREES CELSIUS)	5069
MAXIMUM NONOPERATING (DEGREES CELSIUS)	5071
MINIMUM OPERATING (DEGREES CELSIUS)	5068
MINIMUM NONOPERATING (DEGREES CELSIUS)	5070

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ALTITUDE RATING.
5060	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5060 FEET.
5061	THE OPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5061 METERS.
5062	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5062 FEET.
5063	THE NONOPERATING ALTITUDE RATING SHALL BE FROM SEA LEVEL TO 5063 METERS.
	TEMPERATURE RATING.
5069	THE MAXIMUM OPERATING TEMPERATURE RATING SHALL BE 5069 DEGREES CELSIUS.
5071	THE MAXIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5071 DEGREES CELSIUS.
5068	THE MINIMUM OPERATING TEMPERATURE RATING SHALL BE 5068 DEGREES CELSIUS.
5070	THE MINIMUM NONOPERATING TEMPERATURE RATING SHALL BE 5070 DEGREES CELSIUS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
CONFIGURATION	
(ILLUSTRATION NUMBER), SEE APPENDIX A	1009
DIMENSION TABLE, (SEE TABLE III, MIL-STD-35)	
*UNITS (SELECT ONE)	
U.S. (SELECT ONE)	
(INCHES)	7552
(FEET)	7573
SI (SELECT ONE)	
(CENTIMETERS)	7576
(MILLIMETERS)	7577

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1009	CONFIGURATION ILLUSTRATION(S). THE CONFIGURATION SHALL BE AS SHOWN IN ILLUSTRATION(S) 1009.
7572	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN INCHES OR DEGREES.
7573	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN FEET OR DEGREES.
7576	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN CENTIMETERS OR DEGREES.
7577	ALL DIMENSIONS, UNLESS OTHERWISE SPECIFIED, SHALL BE IN MILLIMETERS OR DEGREES.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ILLUSTRATIONS	
(NUMBER)	4950
NOTE: THIS CODE IS USED TO ENTER APPLICABLE ILLUSTRATIONS WHICH DO NOT HAVE DIMENSIONS.	
TABULATED CHARACTERISTICS (SEE TABLE IV, MIL-STD-35)	
MATERIALS (SEE TABLES VI AND VII, MIL-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VII IS USED.	
FINISHES (SEE TABLES VIII AND IX, MIL-STD-35)	
NOTE: AUTOMATIC WHEN TABLE IX IS USED.	
METALS	
DISSIMILAR METALS.	7580

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4950	ILLUSTRATION(S). ILLUSTRATION(S) 4950 SHALL APPLY TO AID IN THE DEFINITION OF PARAMETERS.
	MATERIALS. MATERIAL(S) SHALL BE AS SPECIFIED IN THE MATERIAL TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE ONLY TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
	FINISH(ES). FINISH(ES) SHALL BE AS SPECIFIED IN THE FINISH TABLE. (NOTE: THE COMPONENT REFERENCE NUMBER(S) ARE TO REFERENCE THE SAME COMPONENT WHEN TABLE CONTINUATION IS NECESSARY.)
7580	METALS. ALL METALS, WHEN USED, (UNLESS OTHERWISE SPECIFIED HEREIN) SHALL BE CORROSION-RESISTANT TYPES OR TREATED TO RESIST CORROSION. DISSIMILAR METALS SHALL NOT BE USED IN INTIMATE CONTACT WITH EACH OTHER UNLESS SUITABLY FINISHED TO RESIST ELECTROLYTIC CORROSION. CURRENT CARRYING PARTS (WHERE APPLICABLE) SHALL BE NONFERROUS, EXCEPT FOR TERMINALS FORMING PART OF A METAL-TO-GLASS SEAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS	
OPERATING FREQUENCIES	
CARRIER FREQUENCIES (SELECT ONE)	
FROM (KHZ)	1562
TO (KHZ)	1563
FROM (MHZ)	1564
TO (MHZ)	1565
NUMBER OF FREQUENCY INCREMENTS (HERTZ)	1566
MODULATION FREQUENCIES (SELECT ONE)	
FROM (KHZ)	1567
TO (KHZ)	1568
FROM (KHZ)	1569
TO (KHZ)	1570

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	DESIGN CHARACTERISTICS
1562	THE LOWER CARRIER FREQUENCY RANGE LIMIT SHALL BE 1562 KILOHERTZ.
1563	THE UPPER CARRIER FREQUENCY RANGE LIMIT SHALL BE 1563 KILOHERTZ.
1564	THE LOWER CARRIER FREQUENCY RANGE LIMIT SHALL BE 1564 MEGAHERTZ.
1565	THE UPPER CARRIER FREQUENCY RANGE LIMIT SHALL BE 1565 MEGAHERTZ.
1566	THERE SHALL BE 1566 HERTZ INCREMENTS FOR THE TRANSMITTER FREQUENCY ADJUSTMENT.
1567	THE LOWER MODULATION FREQUENCY RANGE LIMIT SHALL BE 1567 HERTZ.
1568	THE UPPER MODULATION FREQUENCY RANGE LIMIT SHALL BE 1568 HERTZ.
1569	THE LOWER MODULATION FREQUENCY RANGE LIMIT SHALL BE 1569 KILOHERTZ.
1570	THE UPPER MODULATION FREQUENCY RANGE LIMIT SHALL BE 1570 KILOHERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
TRANSMISSION CYCLE	
INCREMENTS (M SEC)	1571
*PERIOD WITHIN (MIN)	1572
DURATION (SEC)	1573
*REPETITION (MIN)	1574
PULSES PER FREQUENCY PER CYCLE (QTY)	1575
OUTPUT FREQUENCY HARMONICS	
MAXIMUM PERCENT OF FUNDAMENTAL FREQUENCY (PCT)	1576
INPUT POWER	
(VAC)	1577
*(HZ)	1578
*PHASE (DES)	1579
TOLERANCE	1580
(VAC)	1581
*(HZ)	1582
*PHASE (DES)	1583
TOLERANCE	1584

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1571 1572	THE INCREMENTS OF PROGRAMMED TRANSMISSION STEPPING CYCLE SHALL BE 1571 MILLISECOND(S) WITHIN A PERIOD OF 1572 MINUTE(S).
1573 1574	THE LENGTH OF THE TRANSMISSION CYCLE SHALL BE 1573 SECONDS REPEATED EVERY 1574 MINUTE(S).
1575	THERE SHALL BE 1575 PULSE(S) PER FREQUENCY FOR EACH TRANSMISSION CYCLE.
1576	THE OUTPUT FREQUENCY HARMONICS SHALL BE NOT GREATER THAN 1576 PERCENT OF THE FUNDAMENTAL.
1577 1578 1579	THE INPUT VOLTAGE SHALL BE 1577 VOLT(S) AC AT 1578 HERTZ, 1579 PHASE.
1580	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1580 PERCENT.
1581 1582 1583	THE INPUT VOLTAGE SHALL BE 1581 VOLT(S) AC AT 1582 HERTZ, 1583 PHASE.
1584	VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS 1584 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
MAXIMUM POWER (WATTS)	1585
MINIMUM POWER FACTOR (PCT)	1586
(VDC)	1587
TOLERANCE (PCT)	1588
NORMAL TRANSMISSION CURRENT (SELECT ONE)	
(MA)	1589
(A)	1644
CHANNEL CHANGE CURRENT (SELECT ONE)	
(MA)	1645
(A)	1646
TYPES OF MODULATION (SELECT ONE)	
AM.	1590
FM.	1591
PM.	1592
FSK.	1593
PSK.	1594
VIDEO.	1595

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1585 1586	THE INPUT POWER SHALL BE NOT GREATER THAN ~~1586~~ WATT(S) WITH A POWER FACTOR NOT LESS THAN ~~1586~~ PERCENT.
1587	THE INPUT VOLTAGE SHALL BE 1587 VOLT(S) DC.
1588	THE VOLTAGE TOLERANCE SHALL BE PLUS OR MINUS ~~1588~~ PERCENT.
1589	THE NORMAL TRANSMISSION CURRENT SHALL BE ~~1589~~ MILLIAMPERE(S).
1644	THE NORMAL TRANSMISSION CURRENT SHALL BE ~~1644~~ AMPERE(S).
1645	THE CURRENT REQUIRED FOR CHANGING CHANNELS SHALL BE 1645 MILLIAMPERE(S).
1646	THE CURRENT REQUIRED FOR CHANGING CHANNELS SHALL BE 1646 AMPERE(S).
1590	THE CARRIER MODULATING FUNCTION SHALL BE AM.
1591	THE CARRIER MODULATING FUNCTION SHALL BE FM.
1592	THE CARRIER MODULATING FUNCTION SHALL BE PM.
1593	THE CARRIER MODULATING FUNCTION SHALL BE FSK.
1594	THE CARRIER MODULATING FUNCTION SHALL BE PSK.
1595	THE CARRIER MODULATING FUNCTION SHALL BE VIDEO.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
CLASS OF EMISSION (SELECT ONE)	
A0.	1596
Al.	1597
A2.	1598
A3A.	1599
A3B.	1600
A3H.	1601
A3J.	1602
A7J.	1603
A9B.	1604
A9J.	1605
F1.	1606
F4.	1607

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1596	THE EQUIPMENT SHALL TRANSMIT A0 CLASS OF EMISSION.
1597	THE EQUIPMENT SHALL TRANSMIT Al CLASS OF EMISSION.
1598	THE EQUIPMENT SHALL TRANSMIT A2 CLASS OF EMISSION.
1599	THE EQUIPMENT SHALL TRANSMIT A3A CLASS OF EMISSION.
1600	THE EQUIPMENT SHALL TRANSMIT A3B CLASS OF EMISSION.
1601	THE EQUIPMENT SHALL TRANSMIT A3H CLASS OF EMISSION.
1602	THE EQUIPMENT SHALL TRANSMIT A3J CLASS OF EMISSION.
1603	THE EQUIPMENT SHALL TRANSMIT A7J CLASS OF EMISSION.
1604	THE EQUIPMENT SHALL TRANSMIT A9B CLASS OF EMISSION.
1605	THE EQUIPMENT SHALL TRANSMIT A9J CLASS OF EMISSION.
1606	THE EQUIPMENT SHALL TRANSMIT F1 CLASS OF EMISSION.
1607	THE EQUIPMENT SHALL TRANSMIT F4 CLASS OF EMISSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
CHANNELS	
(QUANTITY)	1608
SPACING (KHZ)	1609
CHANGING CYCLES (SEC)	1610
PULSE CHARACTERISTICS	
PROGRAMMING CODE LOGIC	
ZERO (V)	1611
*+ OR - (V)	1640
ONE (V)	1612
*+ OR - (V)	1640
ZERO (DEG)	1642
ONE (DEG)	1643

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1608	THERE SHALL BE 1608 TRANSMISSION PATH(S) OR BAND(S) OF FREQUENCIES.
1609	A FREQUENCY INCREMENT OF 1609 KILOHERTZ SHALL BE BETWEEN THE ASSIGNED FREQUENCY OF ADJACENT CHANNELS.
1610	THE ELAPSED TIME FOR THE SELECTED CHANNEL TO BECOME OPERATIVE SHALL BE NOT GREATER THAN 1610 SECOND(S).
1611 1640	THE PROGRAMMING CODE LOGIC ZERO SHALL BE 1611 VOLT(s), PLUS OR MINUS 1640 VOLT(S).
1612 1641	THE PROGRAMMING CODE LOGIC ONE SHALL BE 1612 VOLT(S) PLUS OR MINUS 1941 VOLT(S).
1642	THE PROGRAMMING CODE LOGIC ZERO FOR BINARY PHASE CODING SHALL BE 1642 DEGREE(S).
1643	THE PROGRAMMING CODE LOGIC ONE FOR BINARY PHASE CODING SHALL BE 1643 DEGREE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
MODULATED SUBPULSES (QTY)	1613
*TIME BASE (MS)	1614
MAXIMUM BANDWIDTH BETWEEN 3DB POINTS (SELECT ONE)	
(HZ)	1615
(KHZ)	1616
INPUT TRIGGER VOLTAGE	
PEAK (V)	1617
*+ OR - (V)	1618
RISE TIME (MICROS)	1619
OUTPUT PULSE WIDTH (MICROS)	1620
MAXIMUM OVERSHOOT AND DROP (PCT)	1621
*DEVIATION + OR - (KHZ)	1622
PULSE DELAY (MICROS)	1623

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1613 1614	THERE SHALL BE 1613 MODULATED SUBPULSE(S) IN THE TRANSMITTER OUTPUT WITHIN A TIME BASE OF 1614 MILLISECOND(S).
1615	EACH SUBPULSE SHALL BE SHAPED TO PROVIDE MAXIMUM ENERGY IN A MAXIMUM BANDWIDTH OF 1615 HERTZ BETWEEN 3 DB POINTS.
1616	EACH SUBPULSE SHALL BE SHAPED TO PROVIDE MAXIMUM ENERGY IN A MAXIMUM BANDWIDTH OF 1616 KILOHERTZ BETWEEN 3 DB POINTS.
1617 1618	THE INPUT TRIGGER VOLTAGE SHALL BE 1617 VOLT(S) PLUS OR MINUS 1618 VOLT(S) PEAK.
1619	THE RISE TIME OF THE OUTPUT PULSE SHALL BE 1619 MICROSECOND(S).
1620	THE OUTPUT PULSE WIDTH SHALL BE 1620 MICROSECOND(S).
1621 1622	THE MAXIMUM OVERSHOOT AND DROP SHALL BE 1621 PERCENT OF THE REFERENCE PULSE AMPLITUDE AT A FREQUENCY DEVIATION OF PLUS OR MINUS 1622 KILOHERTZ.
1623	THE PULSE DELAY SHALL BE 1623 MICROSECOND(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
IMPEDANCE AND VSWR	
IMPEDANCE	
INPUT (SELECT ONE)	
BALANCED (OHM)	1624
UNBALANCED (OHM)	1625
OUTPUT (SELECT ONE)	
BALANCED (OHM)	1626
UNBALANCED (OHM)	1627
MAXIMUM (VSWR)	1628
ISOLATION (SELECT ONE)	
SIGNAL.	1629
POWER.	1630
CASE GROUND.	1631

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1624	THE BALANCED INPUT IMPEDANCE SHALL BE 1624 OHM(S).
1625	THE UNBALANCED INPUT IMPEDANCE SHALL BE 1625 OHM(S).
1626	THE BALANCED OUTPUT IMPEDANCE SHALL BE 1626 OHM(S).
1627	THE UNBALANCED OUTPUT IMPEDANCE SHALL BE 1627 OHM(S).
1628	THE LOAD SHALL BE NOT GREATER THAN 1628 VSWR.
1629	THE DEVICE SHALL BE DESIGNED FOR SIGNAL ISOLATION.
1630	THE DEVICE SHALL BE DESIGNED FOR POWER ISOLATION.
1631	THE DEVICE SHALL BE DESIGNED FOR CASE GROUND ISOLATION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
DEVIATION SENSITIVITY (SELECT ONE)	
+ OR - (KHZ/VRMS)	1632
+ OR - (MHZ/VRMS)	1633
BANDWIDTH (MHZ)	1634
PRESSURIZATION	
DRY AIR PRESSURE DIFFERENTIAL (PSI)	1635
CONNECTORS	
THE INPUT AND OUTPUT CONNECTORS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE.	
DESIGN RELIABILITY RATING	
FAILURE RATE (PCT/1000 HR)	7025
CONFIDENCE LEVEL (PCT)	7026

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

1632 THE DEVIATION SENSITIVITY SHALL BE PLUS OR MINUS 1632 KILOHERTZ PER RMS VOLT.

1633 THE DEVIATION SENSITIVITY SHALL BE PLUS OR MINUS 1633 MEGAHERTZ PER RMS VOLT.

1634 THE DEVIATION SENSITIVITY BANDWIDTH SHALL BE 1634 MEGAHERTZ.

1635 THE TRANSMITTER CASE DRY AIR PRESSURE DIFFERENTIAL SHALL BE 1635 PSI.

THE INPUT AND OUTPUT CONNECTORS SHALL BE IN ACCORDANCE WITH THE FOLLOWING TABLE.

CONNECTOR TABLE

	TYPE NO. OR SERIES DESIGNATION	PANEL LOCATION	VENDOR FSCM OR SPECIFICATION
INPUT	2150	2151	2152
INPUT	2153	2154	2155
OUTPUT	2156	2157	2158
OUTPUT	2159	2160	2161

DESIGN RELIABILITY. THE ITEM(S) SHALL BE DESIGNED, USING MATERIALS AND MANUFACTURING PROCESSES CAPABLE OF MEETING THE FOLLOWING CONDITIONS:

7025 THE FAILURE RATE SHALL BE LESS THAN 7025 PERCENT PER 1000 HOURS.

7026 THE CONFIDENCE LEVEL SHALL BE 7026 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
TEST TEMPERANCE (CONT)	7029
ELECTRICAL STRESS (DEG C)	
VOLTAGE (PCT OF RATED V)	7030
LOAD (PCT OF RATED LOAD)	7027
POWER (PCT OF RATED LOAD)	7028
TEMPERATURE RATING TABLE	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7029	THE DESIGN RELIABILITY SHALL BE AT A TEMPERATURE OF 7029 DEGREES CELCIUS.
7030	THE DESIGN RELIABILITY APPLIED VOLTAGE SHALL BE 7030 PERCENT OF THE RATED LOAD.
7027	THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7027 PERCENT OF THE RATED LOAD.
7028	THE DESIGN RELIABILITY APPLIED LOAD SHALL BE AT 7028 PERCENT OF THE RATED POWER.

TYPE OF TEMPERATURE	MINIMUM	NOMINAL	MAXIMUM
AMBIENT OPERATING	5052	5053	5054
AMBIENT NONOPERATING	5055	5056	5057
STORAGE	7301	5048	7302

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DESIGN CHARACTERISTICS (CONT)	
WEIGHT, MAXIMUM (SELECT ONE)	
(OZ)	7022
(LB)	7023
(G)	7021
(KG)	7024
ACCELERATION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	6272
NO EVIDENCE OF PHYSICAL DAMAGE.	6273
REMAIN WITHIN SPECIFIED TOLERANCE.	6277
NO DISCONTINUITY.	7345

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7022	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7022 OUNCE(S).
7023	MAXIMUM WEIGHT PER UNIT. THE WEIGHT PER UNIT SHALL BE NOT GREATER THAN 7023 POUND(S).
7021	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7021 GRAM(S).
7024	MAXIMUM MASS PER UNIT. THE MASS PER UNIT SHALL BE NOT GREATER THAN 7024 KILOGRAM(S).
6272	ACCELERATION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6272.
6273	ACCELERATION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
6277	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCES.
7345	THERE SHALL BE NO ELECTRICAL DISCONTINUITY DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
DESIGN PERFORMANCE MEASUREMENTS DURING ACCELERATION TEST	
FREQUENCY STABILITY.	1660
POWER OUTPUT.	1661
DISTORTION	1662
FREQUENCY RESPONSE.	1663
HUM AND NOISE.	1664
KEYING.	1665
LINEARITY.	1666
MODULATION CAPABILITY.	1667
SPURIOUS EMISSIONS.	1668

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1660	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1661	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
1662	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1663	FREQUENCY RESPONSE OF THE DEVICE' SHALL BE MEASURED DURING TEST.
1664	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1665	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
1666	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1667	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1668	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
DESIGN PERFORMANCE MEASUREMENTS AFTER ACCELLERATION TEST.	
FREQUENCY STABILITY.	2700
POWER OUTPUT.	2701
DISTORTION.	2702
FREQUENCY RESPONSE.	2703
HUM AND NOISE	2704
KEYING.	2705
LINEARITY.	2706
MODULATION CAPABILITY.	2707
SPURIOUS EMISSIONS.	2708

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2700	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2701	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2702	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2703	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2704	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2705	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2706	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2707	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2708	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT _____	6250
PER MIL-STD-202, METHOD 212.	6251
TEST CONDITION LETTER (SELECT ONE)	
TEST CONDITION LETTER A	
LEVEL (SELECT ONE)	
20 G.	4863
50 G.	4864
100G.	4865
TEST CONDITION LETTER B	
LEVEL (SELECT ONE)	
10,000 G.	4868
20,000 G.	4892
ACCELERATION DIRECTION (SELECT ONE)	
ONE DIRECTION.	1557
BOTH DIRECTIONS.	1558

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6250	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6250.
6251	ACCELERATION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 212 OF MIL-STD-202.
4863	THE TEST LEVEL SHALL BE 20 G-S.
4864	THE TEST LEVEL SHALL BE 50 G-S.
4865	THE TEST LEVEL SHALL BE 100 G-S.
4868	THE TEST LEVEL SHALL BE 10,000 G-S.
4892	THE TEST LEVEL SHALL BE 20,000 G-S.
1557	THE SPECIMEN SHALL BE ACCELERATED IN ONE DIRECTION ONLY.
1558	THE SPECIMEN SHALL BE ACCELERATED IN BOTH DIRECTIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC NAME	CHAR CODE
ACCELERATION (CONT)	
MOUNTING METHOD (SELECT ONE)	
BY ANY SUITABLE METHOD.	6263
BY NORMAL METHOD.	6264
PER DOCUMENT (DOC DES)	6265
TEST CONDITION LETTER C	
LEVEL (G)	4893
PERCENT RATED LOAD APPLIED (PCT)	6210
ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENTS, EXCEPT_____	1675

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6263	MOUNTING SHALL BE ANY SUITABLE METHOD.
6264	MOUNTING SHALL BE BY THE NORMAL METHOD.
6265	MOUNTING SHALL BE IN ACCORDANCE WITH 6265.
4893	THE LEVEL SHALL BE 4893 G-S.
6210	THE ELECTRICAL LOAD SHALL BE 6210 PERCENT OF THE RATED LOAD.
1675	ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1675.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE (CONT)	
REMAIN WITHIN SPECIFIED TOLERANCE.	1676
NO DISCONTINUITY DURING TEST.	1677
DESIGN PERFORMANCE REQUIREMENTS DURING THE ALTITUDE TEST.	
FREQUENCY STABILITY.	1678
POWER OUTPUT.	1679
DISTORTION.	1680
FREQUENCY RESPONSE.	1681
HUM AND NOISE.	1682
KEYING.	1683
LINEARITY.	1684
MODULATION CAPABILITY.	1685
SPURIOUS EMISSIONS.	1686

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1676	ALTITUDE. THE TRANSMITTER SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1677	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1678	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1679	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
1680	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1681	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
1682	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1683	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
1684	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1685	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1686	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE (CONT)	
DESIGN PERFORMANCE REQUIREMENTS AFTER THE ALTITUDE TEST.	
FREQUENCY Stability	2709
POWER OUTPUT.	2710
DISTORTION.	2711
FREQUENCY.	2712
HUM AND NOISE.	2713
KEYING.	2714
LINEARITY.	2715
MODULATION.	2716
SPURIOUS EMISSIONS.	2717

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2709	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2710	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2711	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2712	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2713	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2714	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2715	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2716	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2717	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ALTITUDE (CONT)	
TEST METHODS (SELECT ONE)	
PER THE BASE DOCUMENT, EXCEPT_____	1671
PER MIL-STD-810, METHOD 500.	1672
DURATION OF OPERATION AND MEASUREMENTS (HOURS)	1673
DISTORTION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT	1714
PER AS FOLLOWS:	2803
MAXIMUM HARMONIC DISTORTION AT ANY CARRIER FREQUENCY (PERCENT)	1715
DEVIATION + OR - (KHZ)	1716
CLIPPING LEVEL ADJUSTMENT(PCT)	1717
MINIMUM DB DOWN FROM THE VIDEO SIGNAL (DB)	1718

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1671	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1671.
1672	ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-810, METHOD 500.
1673	THE DURATION OF OPERATION AND MEASUREMENTS SHALL BE 1673 HOUR(S).
1714	DISTORTION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1714.
2803	DISTORTION. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1715 1716	THE MAXIMUM HARMONIC DISTORTION AT ANY SPECIFIED SUBCARRIER FREQUENCY SHALL BE 1715 PERCENT WITH A DEVIATION OF PLUS OR MINUS 1716 KILOHERTZ.
1717	THE MAXIMUM HARMONIC DISTORTION INPUT LEVEL TO THE CLIPPER CIRCUIT SHALL BE ADJUSTED TO 1717 PERCENT OF THE CLIPPING LEVEL.
1718	THE MAXIMUM HARMONIC DISTORTION PRODUCTS SHALL BE NOT LESS THAN 1718 DECIBEL(S) DOWN FROM THE VIDEO SIGNAL.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISTORTION (CONT)	
INTERMODULATION DISTORTION MINIMUM PRODUCTS REDUCTION BELOW TWO-TONE RF ENVELOPE.	
WITH TWO-TONE INPUT (DB)	1719
WITH TWO-TONE OUTPUT (DB)	1720
*(MW)	1721
BELOW ANY TONE (DB)	1.722
BELOW PEAK ENVELOPE POWER (DB)	1723
UNLOADED TEST CHANNEL AVERAGE POWER WHITE NOISE LOADING (DB)	1724

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1719	THE REDUCTION OF INTERMODULATION PRODUCTS SHALL BE NOT LESS THAN 1719 DECIBEL(S) BELOW EITHER TONE OF A TWO-TONE RF ENVELOPE INPUT.
1720 1721	THE MINIMUM REDUCTION OF INTERMODULATION PRODUCTS SHALL BE 1720 DECIBEL(S) BELOW EITHER TONE OF THE TWO-TONE OUTPUT IN 1721 MILLIWATT(S).
1722	THE REDUCTION OF INTERMODULATION PRODUCTS SHALL BE NOT LESS THAN 1722 DECIBEL(S) BELOW ANY TONE.
1723	THE REDUCTION OF INTERMODULATION PRODUCTS SHALL BE NOT LESS THAN 1723 DECIBEL(S) BELOW EITHER TONE OF THE TWO-TONE OUTPUT WITH FULL RATED PEAK ENVELOPE POWER.
1724	THE UNLOADED TEST CHANNEL AVERAGE POWER (WHITE NOISE LOADING) SHALL BE NOT LESS THAN 1724 DECIBEL(s).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISTORTION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1691
PER DOCUMENT (DOC DES)	1692
MODULATION DISTORTION	
INPUT FREQUENCY RANGE (SELECT ONE)	
(HZ)	1693
(KHZ)	1694
INPUT FREQUENCY RANGE (SELECT ONE)	
FROM (HZ)	1695
*TO (HZ)	1696
FROM (KHZ)	1697
*TO (KHZ)	1698
MODULATION (PERCENT)	1699

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1691	DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1691.
1692	DISTORTION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1692.
1693	THE INPUT MODULATION FREQUENCY SHALL BE 1693 HERTZ.
1694	THE INPUT MODULATION FREQUENCY SHALL BE 1694 KILOHERTZ.
1695 1696	THE INPUT FREQUENCY RANGE SHALL BE FROM 1695 HERTZ TO 1696 HERTZ.
1697 1698	THE INPUT FREQUENCY RANGE SHALL BE FROM 1697 KILOHERTZ TO 1698 KILOHERTZ.
1699	THE MODULATION LEVEL OF THE SUBCARRIER FREQUENCY SHALL BE 1699 PERCENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
DISTORTION (CONT)	
INTERMODULATION DISTORTION	
MODE (SELECT ONE)	
LSB.	1700
USB.	1701
ISB.	1702
AM.	1703
CW.	1704
RATT.	1705
AVERAGE INPUT POWER (SELECT ONE)	
(W)	1707
(KW)	1708
STANDARD TWO-TONE AUDIO INPUT EQUAL AMPLITUDE AUDIO SIGNALS	
(HZ)	1709
*(HZ)	1710
VOLTAGE PER TONE (MV)	1711

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1700	THE MODE OF OPERATION SHALL BE LOWER SIDEBAND.
1701	THE MODE OF OPERATION SHALL BE UPPER SIDEBAND.
1702	THE MODE OF OPERATION SHALL BE INDEPENDENT SIDEBAND.
1703	THE MODE OF OPERATION SHALL BE AMPLITUDE MODULATION.
1704	THE MODE OF OPERATION SHALL BE CONTINUOUS WAVE.
1705	THE MODE OF OPERATION SHALL BE SINGLE OR MULTICHANNEL TELEGRAPHY.
1707	THE AVERAGE POWER INPUT SHALL BE 1707 WATT(S) DURING CROSSTALK MEASUREMENT.
1708	THE AVERAGE POWER INPUT SHALL BE 1708 KILOWATT(S) DURING CROSSTALK MEASUREMENT.
1709 1710	THE STANDARD TWO-TONE AUDIO INPUT OF TWO EQUAL AMPLITUDE AUDIO SIGNALS SHALL BE 1709 HERTZ AND 1710 HERTZ.
1711	THE SIGNAL VOLTAGE LEVEL PER TONE OF THE STANDARD TWO-TONE AUDIO INPUT SHALL BE 1711 MILLIVOLT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY AND GAIN STABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1752
AS FOLLOWS:	2800
WITHIN + OR - (HZ)	1753
*AT (KHZ)	1754
WITHIN + OR - (HZ)	1755
*AT (MHZ)	1756
WITHIN + OR - (KHZ)	1757
*AT (MHZ)	1758
WITHIN + OR - (PCT)	1759
*OF (KHZ)	1760
WITHIN + OR - (PCT)	1761
*OF (MHZ)	1762
MAXIMUM PHASE INSTABILITY (DEG) IN (MSEC)	1763 1764
CALIBRATION ACCURACY (SELECT ONE)	
(PERCENT)	1765
AT (KHZ)	1766
(PERCENT)	1767
AT (MHZ)	1768
MAXIMUM CHANGE IN GAIN DUE TO LINE VOLTAGE AND FREQUENCY VARIATION (DB)	1769

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1752	FREQUENCY AND GAIN STABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1752.
2800	FREQUENCY AND GAIN STABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1753 1754	THE FREQUENCY SHALL BE WITHIN PLUS OR MINUS 1753 HERTZ AT A FREQUENCY OF 1754 KILOHERTZ.
1755 1756	THE FREQUENCY STABILITY SHALL BE WITHIN PLUS OR MINUS 1755 HERTZ AT A FREQUENCY OF 1756 MEGAHERTZ.
1757 1758	THE FREQUENCY STABILITY SHALL BE WITHIN PLUS OR MINUS 1757 KILOHERTZ AT A FREQUENCY OF 1758 MEGAHERTZ.
1759 1750	THE FREQUENCY STABILITY SHALL BE WITHIN PLUS OR MINUS 1759 PERCENT OF THE 1760 KILOHERTZ CARRIER FREQUENCY.
1761 1762	THE FREQUENCY STABILITY SHALL BE WITHIN PLUS OR MINUS 1761 PERCENT OF THE 1762 MEGAHERTZ CARRIER FREQUENCY.
1763 1764	THE PHASE DEVIATION SHALL BE NOT GREATER THAN 1763 DEGREE(S) WITHIN A DURATION OF 1764 MILLISECOND(S)
1765 1766	THE CALIBRATION ACCURACY SHALL BE 1765 PERCENT AT AN OPERATING FREQUENCY OF 1766 KILOHERTZ.
1767 1768	THE CALIBRATION ACCURACY SHALL BE 1767 PERCENT AT AN OPERATING FREQUENCY OF 1768 MEGAHERTZ.
1769	THE CHANGE IN GAIN DUE TO LINE VOLTAGE AND FREQUENCY VARIATION SHALL BE NOT GREATER THAN 1769 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY AND GAIN STABILITY (CONT)	
MAXIMUM CHANGE IN RESONANT FREQUENCY DUE TO LINE VOLTAGE AND FREQUENCY VARIATION IN 10^8 (PARTS)	1770
MAXIMUM LONG-TERM FREQUENCY IN 10^9 PER DAY (PARTS)	1771
MAXIMUM CHANGE IN INTERNAL FREQUENCY STANDARD (SELECT ONE)	
10^7 PER YEAR (PARTS)	1772
10^9 PER DAY (PARTS)	1773
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1729
PER DOCUMENT (DOC DES)	1730
CONDITION (SELECT ONE)	
STANDARD.	1731
SERVICE.	1732

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1770	THE CHANGE IN RESONANT FREQUENCY DUE TO LINE VOLTAGE AND FREQUENCY VARIATION SHALL BE NOT GREATER THAN 1770 PART(S) PER TEN TO THE EIGHTH POWER.
1771	THE OVERALL LONG-TERM FREQUENCY DRIFT RATE SHALL BE NOT GREATER THAN 1771 PART(S) PER TEN TO THE NINTH PER DAY.
1772	THE CHANGE IN THE INTERNAL FREQUENCY STANDARD SHALL BE NOT GREATER THAN 1772 PART(S) PER TEN TO THE SEVENTH PER YEAR.
1773	THE CHANGE IN THE INTERNAL FREQUENCY STANDARD SHALL BE NOT GREATER THAN 1773 PART(S) PER TEN TO THE NINTH PER DAY.
1729	FREQUENCY AND GAIN STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1729.
1730	FREQUENCY AND GAIN STABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1730.
1731	THE CONDITIONS OF TEST SHALL BE STANDARD.
1732	THE TEST SHALL BE PERFORMED UNDER SERVICE CONDITIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY AND GAIN STABILITY (CONT)	
OPERATING MODE (SELECT ONE)	
LSB.	1733
USB.	1734
ISB.	1735
AM.	1736
CW.	1737
RATT.	1738
ISB/RATT.	1739
FREQUENCY STANDARD (SELECT ONE)	
INTERNAL (KHZ)	1740
EXTERNAL (KHZ)	1741
INTERNAL (MHZ)	1742
EXTERNAL (MHZ)	1743
MODULATION (PCT)	1744
OPERATING PERIOD (SELECT ONE)	
(MINUTE)	1745
(HOUR)	1746

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	THE OPERATING MODE SHALL BE AS FOLLOWS:
1733	LOWER SIDEBAND.
1734	UPPER SIDEBAND.
1735	INDEPENDENT SIDEBAND.
1736	AMPLITUDE MODULATION.
1737	CONTINUOUS WAVE TELEGRAPHY.
1738	SINGLE OR MULTICHANNEL TELEGRAPHY.
1739	INDEPENDENT SIDEBAND/SINGLE CHANNEL TELEGRAPHY.
1740	THE TRANSMITTER OPERATION SHALL BE FROM AN INTERNAL FREQUENCY STANDARD OF 1740 KILOHERTZ,
1741	THE TRANSMITTER OPERATION SHALL BE FROM AN EXTERNAL FREQUENCY STANDARD OF 1741 KILOHERTZ.
1742	THE TRANSMITTER OPERATION SHALL BE FROM AN INTERNAL FREQUENCY STANDARD OF 1742 MEGAHERTZ.
1743	THE TRANSMITTER OPERATION SHALL BE FROM AN EXTERNAL FREQUENCY STANDARD OF 1743 MEGAHERTZ.
1744	THE CARRIER MODULATION FREQUENCY SHALL BE 1744 PERCENT.
1745	THE DEVICE SHALL OPERATE 1745 MINUTE(S) DURING STABILITY MEASUREMENT.
1746	THE DEVICE SHALL OPERATE 1746 HOUR(S) DURING STABILITY MEASUREMENT.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY AND GAIN STABILITY (CONT)	
WARM-UP PERIOD (SELECT ONE)	
(MINUTE)	1747
(HOUR)	1748
MAXIMUM STABILIZATION PERIOD (HOUR)	1749
MAXIMUM AMBIENT TEMPERATURE (DEGREES CELSIUS)	1750
LINE VOLTAGE AND FREQUENCY VARIATION TOLERANCE	
NOMINAL VOLTAGE + OR - (PERCENT)	1726
NOMINAL FREQUENCY + OR - (PERCENT)	1727
FREQUENCY RESPONSE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1781

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1747	POWER SHALL BE APPLIED TO THE DEVICE 1747 MINUTE(S) PRIOR TO MEASUREMENTS.
1748	POWER SHALL BE APPLIED TO THE DEVICE 1748 HOUR(S) PRIOR TO MEASUREMENTS.
1749	THE INITIAL STABILIZATION PERIOD AFTER TURN-ON SHALL BE NOT GREATER THAN 1749 HOUR(S).
1750	THE AMBIENT TEMPERATURE DURING THE MEASUREMENT PERIOD SHALL BE NOT GREATER THAN 1750 DEGREE(S) CELSIUS.
1726	THE LINE VOLTAGE VARIATION TOLERANCE SHALL BE PLUS OR MINUS 1726 PERCENT OF NOMINAL VOLTAGE.
1727	THE FREQUENCY VARIATION TOLERANCE SHALL BE PLUS OR MINUS 1727 PERCENT OF NOMINAL FREQUENCY.
1781	FREQUENCY RESPONSE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1781.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RESPONSE (CONT)	
AS FOLLOWS:	
RESPONSE PER FREQUENCY RESPONSE TABLE	1782

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE | STANDARD PARAGRAPH

FREQUENCY RESPONSE. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:

1782 FREQUENCY RESPONSE SHALL BE IN ACCORDANCE WITH THE FREQUENCY RESPONSE TABLE.

FREQUENCY RESPONSE TABLE

REF NO.	CHAN	BAND IN	BAND OUT	APPLIED FREQUENCY DISCRETE VAL	UNITS	TOL +OR- (HZ)	O-DB REF (HZ)
1	2200	2201	2202	2203	2204	2205	2206
2	2207	2208	2209	2210	2211	2212	2213
3	2214	2215	2216	2217	2218	2219	2220
4	2221	2222	2223	2224	2225	2226	2227
5	2228	2229	2230	2231	2232	2233	2234
6	2235	2236	2237	2238	2239	2240	2241
7	2242	2243	2244	2245	2246	2247	2248
8	2249	2250	2251	2252	2253	2254	2255
9	2256	2257	2258	2259	2260	2261	2262
10	2263	2264	2265	2266	2267	2268	2269

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RESPONSE (CONT)	
FREQUENCY RESPONSE TABLE (CONT)	
FREQUENCY RESPONSE TABLE (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR
CODE STANDARD PARAGRAPH

FREQUENCY RESPONSE TABLE (CONT)

REF NO,	APPLIED FREQUENCY RANGE FROM VAL	FROM UNITS	TO VAL	TO UNITS	0-DB REF (HZ)	PCT MOD
1	2270	2271	2272	2273	2274	2275
2	2276	2277	2278	2279	2280	2281
3	2282	2283	2284	2285	2286	2287
4	2288	2289	2290	2291	2292	2293
5	2294	2295	2296	2297	2298	2299
6	2300	2301	2302	2303	2304	2305
7	2306	2307	2308	2309	2310	2311
8	2312	2313	2314	2315	2316	2317
9	2318	2319	2320	2321	2322	2323
10	2324	2325	2326	2327	2328	2329

FREQUENCY RESPONSE TABLE (CONT)

REF NO.	RESPONSE DB (+ OR -) MIN	MAX
1	2330	2331
2	2332	2333
3	2334	2335
4	2336	2337
5	2338	2339
6	2340	2341
7	2342	2343
8	2344	2345
9	2346	2347
10	2348	2349

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
FREQUENCY RESPONSE (CONT)	
FLAT WITHIN + OR - (DB)	1783
BETWEEN (HZ)	1784
*AND (HZ)	1785
MAXIMUM PEAK TO PEAK FREQUENCY DEVIATION (PCT)	1786
FROM (HZ)	1787
*TO (HZ)	1788
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1777
PER DOCUMENT (DOC DES)	1778
TEST INPUTS PER FREQUENCY RESPONSE TABLE	1779
HUM AND NOISE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1816

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1783	THE RESPONSE SHALL BE FLAT WITHIN PLUS OR MINUS 1783 DECIBEL(S).
1784 1785	THE AUDIO FREQUENCY RANGE SHALL BE BETWEEN 1784 HERTZ AND 1785 HERTZ DURING MEASUREMENT OF THE RESPONSE FLATNESS.
1786	THE MAXIMUM PEAK TO PEAK FREQUENCY DEVIATION SHALL BE 1786 PERCENT OF THE ENVELOPE.
1787 1788	THE MAXIMUM PEAK TO PEAK FREQUENCY DEVIATION MEASUREMENT SHALL BE IN THE FREQUENCY RANGE OF 1787 HERTZ TO 1788 HERTZ.
1777	FREQUENCY RESPONSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1777.
1778	FREQUENCY RESPONSE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1778.
1779	TEST INPUTS SHALL BE IN ACCORDANCE WITH THE FREQUENCY RESPONSE TABLE.
1816	HUM AND NOISE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1816.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARCTERISTIC NAME	CHAR CODE
HUM AND NOISE (CONT)	
AS FOLLOWS:	
MINIMUM NOISE LEVEL.	
BELOW MODULATION LEVEL REFERENCE (DB)	1817
BELOW FULL RATED AVERAGE POWER OUTPUT (DB)	1818
BELOW ONE MILLIWATT KEY-UP CONDITION (DB)	1819
MAXIMUM CARRIER RIPPLE AND/OR CONDITION NOISE LEVEL	
BELOW 100 PERCENT MODULATED CARRIER (DB)	1820
KEY-DOWN CONDITION (-DBM)	1821
KEY-UP CONDITION (-DBM)	1822
MAXIMUM MODULATION LEVEL WITH POWER CW OPERATION (PERCENT)	1823

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	HUM AND NOISE. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1817	THE AUDIO NOISE LEVEL SHALL BE NOT LESS THAN 1817 DECIBEL(S) BELOW THE MODULATION LEVEL REFERENCE.
1818	THE ELECTRICAL NOISE SHALL BE NOT LESS THAN 1818 DECIBEL(S) BELOW THE TRANSMITTER'S FULL RATED AVERAGE POWER OUTPUT.
1819	THE AVERAGE NOISE POWER OUTPUT SHALL BE NOT LESS THAN 1819 DECIBEL(S) BELOW ONE MILLIWATT WHEN THE TRANSMITTER IS IN THE KEY-UP OR RECEIVE MODE CONDITION.
1820	THE RF CARRIER RIPPLE AND NOISE SHALL BE NOT GREATER THAN 1820 DECIBEL(S) BELOW THE 100 PERCENT MODULATED CARRIER.
1821	THE RF CARRIER RIPPLE AND NOISE SHALL BE NOT GREATER THAN MINUS 1821 DBM WITH THE TRANSMITTER IN THE KEY-DOWN CONDITION.
1822	THE RF CARRIER RIPPLE AND NOISE SHALL BE NOT GREATER THAN MINUS 1822 DBM WITH THE TRANSMITTER IN THE KEY-UP CONDITION.
1823	THE RF CARRIER RIPPLE AND NOISE SHALL BE NOT GREATER THAN 1823 PERCENT MODULATION LEVEL UNDER CONDITIONS OF FULL POWER CW Operation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUM AND NOISE (CONT)	
MINIMUM SUPPRESSION OF POWER SUPPLY HUM SIGNALS (-DBM)	1824
*RF OUTPUT (MW)	1825
MINIMUM OUTPUT SIGNAL-TO-HUM (USB AND LSB)(RATIO)	1826
HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER THE TEST.	1834
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1803
PER DOCUMENT (DOC DES)	1804
MODULATION LEVEL (PCT)	1805
*LEVEL REFERENCE (DB)	1806
GAIN FREQUENCIES	
HIGH (MHZ)	1807
*LOW (MHZ)	1808
USB AND LSB	
(MHZ)	1809
*(MHZ)	1810

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1824 1825	THE SUPPRESSION OF POWER SUPPLY HUM DISTORTION SHALL BE NOT LESS THAN MINUS 1824 DBM WITH AN RF OUTPUT OF 1825 MILLIWATT(S) PRODUCED BY A STANDARD SINGLE TONE AUDIO INPUT.
1826	THE OUTPUT SIGNAL-TO-HUM RATIO SHALL BE NOT LESS THAN 1826 ON BOTH UPPER AND LOWER SIDEBANDS.
1834	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
1803	HUM AND NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1803.
1804	HUM AND NOISE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1804.
1805 1806	THE MODULATION LEVEL OF THE CARRIER FREQUENCY SHALL BE 1805 PERCENT AT A DETECTED AUDIO VOLTAGE REFERENCE LEVEL OF 1806 DECIBEL(S).
1807 1808	THE OVERALL HIGH AND LOW GAIN FREQUENCIES SHALL BE 1807 MEGAHERTZ AND 1808 MEGAHERTZ, RESPECTIVELY.
1809 1810	THE UPPER AND LOWER SIDEBANDS SHALL BE 1809 MEGAHERTZ AND 1810 MEGAHERTZ, RESPECTIVELY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KU)

CHARACTERISTIC NAME	CHAR CODE
HUM AND NOISE (CONT)	
STANDARD SINGLE TONE AUDIO INPUT (HZ)	1811
AUDIO INPUT LOAD (OHMS)	1812
NO AUDIO INPUT SIGNAL,	1813
NO APC OR PPC VOLTAGES APPLIED.	1814
HUMIDITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4798
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	4799
REMAIN WITHIN SPECIFIED TOLERANCE.	4791
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1477
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	4795
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	4805
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MA)	4813
MAXIMUM LEAKAGE AFTER DRYING (MA)	4803

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1811	THE STANDARD SINGLE TONE AUDIO INPUT SHALL BE 1811 HERTZ DURING MEASUREMENT OF HUM DISTORTION SIGNALS.
1812	THE AUDIO INPUT TERMINATED RESISTANCE LOAD SHALL BE 1812 OHM(S).
1813	THERE SHALL BE NO AUDIO INPUT SIGNAL DURING MEASUREMENT OF BROADBAND NOISE OUTPUT.
1814	THERE SHALL BE NO AVERAGE POWER CONTROL OR PEAK POWER CONTROL VOLTAGES APPLIED.
4798	HUMIDITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4798.
4799	HUMIDITY. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
4791	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1477	THERE SHALL BE NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DIELECTRIC WITHSTANDING VOLTAGE TEST IS PERFORMED.
4795	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4795 MEGOHMS AT HIGH HUMIDITY.
4805	INSULATION RESISTANCE SHALL BE NOT LESS THAN 4805 MEGOHMS AFTER DRYING.
4813	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 4813 MILLIAMPERE(S) AT HIGH HUMIDITY.
4803	LEAKAGE AFTER DRYING SHALL BE NOT GREATER THAN 4803 MILLIAMPERE(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
DESIGN PERFORMANCE REQUIREMENTS DURING HUMIDITY TEST	
FREQUENCY STABILITY.	1789
POWER OUTPUT.	1790
DISTORTION.	1791
FREQUENCY RESPONSE.	1792
HUM AND NOISE.	1793
KEYING.	1794
LINEARITY.	1795
MODULATION CAPABILITY.	1796
SPURIOUS EMISSIONS.	1797
DESIGN PERFORMANCE REQUIREMENTS AFTER HUMIDITY TEST	
FREQUENCY STABILITY.	2718
POWER OUTPUT.	2719

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1789	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1790	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
1791	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1792	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
1793	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1794	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST .
1795	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1796	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1797	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2718	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2719	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
HUMIDITY (CONT)	
DISTORTION.	2720
FREQUENCY RESPONSE.	2721
HUM AND NOISE.	2722
KEYING.	2723
LINEARITY.	2724
MODULATION CAPABILITY.	2725
SPURIOUS EMISSIONS.	2726
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4788
PER MIL-STD-202, METHOD 103.	4853
TEST CONDITION (LETTER)	4890
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	6207
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	6206

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2720	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2721	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2722	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2723	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2724	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2725	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2726	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
4788	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4788.
4853	HUMIDITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 103 OF MIL-STD-202.
4890	TEST CONDITION LETTER 4890 SHALL APPLY.
6207	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AT HIGH HUMIDITY.
6206	DIELECTRIC WITHSTANDING VOLTAGE TEST SHALL BE PERFORMED AFTER DRYING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4819
NO EVIDENCE OF PHYSICAL DAMAGE.	4820
REMAIN WITHIN SPECIFIED TOLERANCE.	4822
MINIMUM INSULATION RESISTANCE (MEGOHMS)	4825
DESIGN PERFORMANCE REQUIREMENTS AFTER IMMERSION TEST	
FREQUENCY STABILITY.	1830
POWER OUTPUT.	1831
DISTORTION.	1832
FREQUENCY RESPONSE.	1833
HUM AND NOISE.	1834
KEYING.	1835
LINEARITY.	1836
MODULATION CAPABILITY.	1837
SPURIOUS EMISSIONS.	1838

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4819	IMMERSION. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4819.
4820	IMMERSION. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4822	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
4825	INSULATION RESISTANCE AFTER TEST SHALL BE NOT LESS THAN 4825 MEGOHMS.
1830	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
1831	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST l
1832	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
1833	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
1834	HUM AND NOISE SHALL BE MEASURED AFTER TEST.
1835	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST l
1836	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
1837	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
1838	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
IMMERSION (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4809
PER MIL-STD-202, METHOD 104,	4810
TEST CONDITION (LETTER)	4811
MEASUREMENTS AFTER FINAL CYCLE IF OTHER THAN 24 (HOURS)	4812
MOUNTING (DOC DES)	2185
KEYING	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1869
AS FOLLOWS:	
KEYING SPEEDS (SELECT ONE)	2810
CW (WORDS PER MINUTE)	1870
FSK (WORDS PER MINUTE)	1871
RATT (WORDS PER MINUTE)	1872

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHAR CODE	STANDARD PARAGRAPH
4809	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4809.
4810	IMMERSION. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 104 OF MIL-STD-202.
4811	TEST CONDITION LETTER 4811 SHALL APPLY.
4812	FINAL MEASUREMENT(S) SHALL BE MADE WITHIN 4812 HOUR(s) AFTER THE FINAL CYCLE.
2185	MOUNTING SHALL BE IN ACCORDANCE WITH 2185.
1869	KEYING. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1869.
2810	KEYING. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1870	THE KEYING SPEED SHALL BE 1870 WORDS PER MINUTE FOR CONTINUOUS WAVE OPERATIONS.
1871	THE KEYING SPEED SHALL BE 1871 WORDS PER MINUTE FOR FSK OPERATIONS.
1872	THE KEYING SPEED SHALL BE 1872 WORDS PER MINUTE FOR RATT OPERATIONS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
KEYING (CONT)	
CW (BAUDS)	1873
FSK (BAUDS)	1874
RATT (BAUDS)	1875
KEYING WAVE SHAPE	
RISE TIME (SELECT ONE)	
(MICROS)	1876
KEY DOWN TIME (PCT)	1877
DECAY TIME (SELECT ONE)	
(MICROS)	1878
KEY DOWN TIME (PCT)	1879
OVERSHOOT	
MAXIMUM KEY-DOWN AMPLITUDE (PCT)	1880
OFF-TIME (SELECT ONE)	
(MICROS)	1881
MINIMUM KEY-DOWN TIME (PCT)	1882

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1873	THE KEYING SPEED SHALL BE 1873 BAUDS FOR CW OPERATIONS.
1874	THE KEYING SPEED SHALL BE 1874 BAUDS FOR OPERATIONS.
1875	THE KEYING SPEED SHALL BE 1875 BAUDS FOR RATT OPERATIONS.
1876	THE RISE TIME OF THE KEYED WAVE SHALL BE 1876 MICROSECOND(S).
1877	THE RISE TIME OF THE KEYED WAVE SHALL BE 1877 PERCENT OF THE TOTAL KEY-DOWN TIME.
1878	THE DECAY TIME OF THE KEYED WAVE SHALL BE 1878 MICROSECOND(S).
1879	THE DECAY TIME OF THE KEYED WAVE SHALL BE 1879 PERCENT OF THE TOTAL KEY-DOWN TIME.
1880	THE OVERSHOOT OF THE KEYED WAVE SHALL NOT EXCEED 1880 PERCENT OF THE STEADY STATE KEY-DOWN AMPLITUDE.
1881	THE OFF-TIME INTERVAL IN THE KEYED WAVE SHALL BE 1881 MICROSECOND(S).
1882	THE OFF-TIME INTERVAL IN THE KEYED WAVE SHALL BE NOT LESS THAN 1882 PERCENT OF THE KEY-DOWN TIME.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
KEYING (CONT)	
SWITCHING TIME (STANDBY TO TRANSMIT)	
MAXIMUM # (S)	1883
CARRIER-ON OPERATION	
MAGNITUDE OF KEYING PULSES	
(VP-P)	1884
MAXIMUM KEYING TIME (CARRIER GOES ON) (SELECT ONE)	
(MS)	1885
(MICROS)	1886
RF OUTPUT POWER DEVELOPED (PERCENT)	1887
NO KEYING TRANSIENTS.	1888
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1844
PER DOCUMENT (DOC DES)	1845

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1883	THE TRANSMITTER SWITCH INTERVAL FROM STANDBY TO TRANSMIT SHALL BE NOT GREATER THAN 1883 SECOND(S).
1884	THE MAGNITUDE OF THE PULSE THAT KEYS THE TRANSMITTER SHALL BE 1884 VOLT(S) PEAK TO PEAK.
1885	THE TIME BETWEEN APPLICATION OF A PULSE AND DEVELOPMENT OF SPECIFIED RF OUTPUT POWER SHALL BE NOT GREATER THAN 1885 MILLISECOND(S).
1886	THE TIME BETWEEN APPLICATION OF A PULSE AND DEVELOPMENT OF SPECIFIED RF OUTPUT POWER SHALL BE NOT GREATER THAN 1886 MICROSECOND(S).
1887	THE RF OUTPUT POWER DEVELOPED WITHIN SPECIFIED KEYING TIME AFTER APPLICATION OF KEYING PULSE SHALL BE 1887 PERCENT.
1888	THERE SHALL BE NO KEYING TRANSIENT WHEN THE TRANSMITTER IS KEYED AND UNKEYED.
1844	KEYING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1844.
1845	KEYING. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1845.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
KEYING (CONT)	
CHANNEL IDENTIFICATION (DES)	1846
OPERATING MODE	
LSB.	1847
USB.	1848
ISB.	1849
AM.	1850
CW.	1851
RATT.	1852
ISB/RATT.	1853
CW ON-OFF KEYING TONE FREQUENCY (SELECT ONE)	
(HZ)	1854
(KHZ)	1855
FREQUENCY SHIFT KEYING RANGE	
FROM (HZ)	1856
*TO (HZ)	1857
“MARK” SIGNAL FREQUENCY	
(HZ)	1858
*+ OR - (PCT)	1859
“SPACE” SIGNAL FREQUENCY	
(HZ)	1860
*+ OR - (PCT)	1861

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1846	CHANNEL 1846 SHALL BE ENERGIZED FOR TEST.
	THE OPERATING MODE SHALL BE AS FOLLOWS:
1847	LOWER SIDEBAND.
1848	UPPER SIDEBAND.
1849	INDEPENDENT SIDEBAND.
1850	AMPLITUDE MODULATION.
1851	CONTINUOUS WAVE TELEGRAPHY.
1852	SINGLE OR MULTICHANNEL Telegraphy
1853	INDEPENDENT SIDEBAND/SINGLE CHANNEL TELEGRAPHY.
1854	THE CONTINUOUS WAVE ON-OFF KEYING TONE FREQUENCY SHALL BE 1854 HERTZ.
1855	THE CONTINUOUS WAVE ON-OFF KEYING TONE FREQUENCY SHALL BE 1855 Kilohertz.
1856 1857	THE FREQUENCY SHIFT KEYING RANGE SHALL BE FROM 1856 HERTZ TO 1857 HERTZ.
1858 1859	THE ASSIGNED FREQUENCY FOR THE MARK OR CLOSED-CIRCUIT SIGNAL SHALL BE 1858 HERTZ PLUS OR MINUS 1859 PERCENT OF ASSIGNED FREQUENCY.
1860 1861	THE ASSIGNED FREQUENCY FOR THE SPACE OR OPEN-CIRCUIT SIGNAL SHALL BE 1860 HERTZ PLUS OR MINUS 1861 PERCENT OF THE ASSIGNED FREQUENCY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
KEYING (CONT)	
SWEEP RATE (WITH PHASE MODULATION)	
(CPS)	1862
RF SIGNAL INPUT FREQUENCY (SELECT ONE)	
(KHZ)	1863
(MHZ)	1864
VOLTAGE OUTPUT LEVEL	
(VRMS)	1865
*+ OR - (VRMS)	1866
NEUTRAL INPUT LOOP CURRENT (RATT GENERATED SIGNALS)	
(MA)	1867
KEYING VOLTAGE	
BETWEEN + (VDC)	1841
*AND + (VDC)	1842
LINEARITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1902
AS FOLLOWS:	2815
OVERALL MODULATION LINEARITY WITHIN + OR - (DB)	1903

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1862	THE SWEEP RATE SHALL BE 1862 SWEEP(S) PER SECOND WITH THE FREQUENCY SHIFT KEYER PHASE MODULATED.
1863	THE RF SIGNAL INPUT FREQUENCY SHALL BE 1863 KILOHERTZ.
1864	THE RF SIGNAL INPUT FREQUENCY SHALL BE 1864 MEGAHERTZ.
1865 1866	THE VOLTAGE OUTPUT LEVEL SHALL BE 1865 VOLT(S) RMS PLUS OR MINUS 1866 VOLT(S) RMS FOR FSK RF SIGNAL FREQUENCY INPUT.
1867	THE NEUTRAL INPUT LOOP CURRENT FOR EXCITING THE RATT TONE GENERATOR SHALL BE 1867 Milliampere
1841 1842	THE KEYER OPERATING VOLTAGE RANGE SHALL BE BETWEEN PLUS 1841 VOLT(S) DC AND PLUS 1842 VOLT(S) DC.
1902	Linearity THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1902.
2815	LINEARITY. THE REQUIREMENTS SHALL BE AS FOLLOWS:
1903	THE OVERALL MODULATION LINEARITY SHALL BE WITHIN PLUS OR MINUS 1903 DECIBEL(S).

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
LINEARITY (CONT)	
WITHIN PERCENT OF MAXIMUM PEAK-TO-PEAK FREQUENCY DEVIATION (PCT)	1904
PERCENT VARIATION OF BEST STRAIGHT LINE	
+ OR - (PCT)	1905
*TO (KHZ)	1906
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1893
PER DOCUMENT (DOC DES)	1894
AUDIO INPUT SIGNAL RANGE (SELECT ONE)	
FROM (HZ)	1895
*TO (HZ)	1896
FROM (KHZ)	1897
*TO (KHZ)	1898
DATA INPUT VOLTAGE LEVEL	
(VRMS)	1899
*+ OR - (VRMS)	1900
MODULATION CAPABILITY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1904	THE OVERALL MODULATION LINEARITY SHALL BE 1904 PERCENT OF THE MAXIMUM PEAK-TO-PEAK FREQUENCY DEVIATION.
1905 1906	THE OVERALL MODULATION LINEARITY SHALL BE PLUS OR MINUS 1905 PERCENT VARIATION OF THE BEST STRAIGHT LINE TO AN UPPER FREQUENCY OF 1906 KILOHERTZ.
1893	LINEARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1893.
1894	LINEARITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1894.
1895 1896	THE AUDIO INPUT SIGNAL RANGE SHALL BE BETWEEN 1895 HERTZ AND 1896 HERTZ.
1897 1898	THE AUDIO INPUT SIGNAL RANGE SHALL BE BETWEEN 1897 KILOHERTZ AND 1898 KILOHERTZ.
1899 1900	THE DATA INPUT VOLTAGE LEVEL SHALL BE 1899 VOLT(S) RMS PLUS OR MINUS 1900 VOLT(S) RMS.
1935	MODULATION CAPABILITY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1935.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KU)

CHARACTERISTIC NAME	CHAR CODE
MODULATION CAPABILITY (CONT)	
AS FOLLOWS:	2820
CARRIER MODULATION (PCT)	1936
SUBCARRIER MODULATION	
PERCENT VARIATION OF SUBCARRIER CENTER FREQUENCY + OR - (PCT)	1937
MAXIMUM AUDIO INPUT VOLTAGE	
LINE LEVEL CONTROL AT CLOCKWISE STOP (MVRMS)	1938
LINE LEVEL CONTROL AT COUNTERCLOCKWISE STOP (MVRMS)	1939
MAXIMUM FREQUENCY DEVIATION (SELECT ONE)	
+ OR - (HZ)	1940
+ OR - (KHZ)	1941
MODULATION SENSITIVITY PER ONE KHZ DEVIATION (VRMS)	1942
MAXIMUM ALLOWABLE FREQUENCY ERROR (HZ)	1943

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2820	MODULATION CAPABILITY. THE REQUIREMENT(S) SHALL BE AS FOLLOWS:
1936	THE RF CARRIER MODULATION SHALL BE 1936 PERCENT.
1937	VARIATION OF THE SUBCARRIER FREQUENCY SHALL NOT EXCEED PLUS OR MINUS 1937 PERCENT OF THAT FREQUENCY.
1938	THE AUDIO INPUT VOLTAGE WITH THE LINE LEVEL CONTROL AT THE CLOCKWISE STOP SHALL BE NOT GREATER THAN 1938 MILLIVOLT(S) RMS.
1939	THE AUDIO INPUT VOLTAGE WITH THE LINE LEVEL CONTROL AT THE COUNTERCLOCKWISE STOP SHALL BE NOT GREATER THAN 1939 MILLIVOLT(S) RMS.
1940	THE FREQUENCY DEVIATION SHALL BE NOT GREATER THAN OR MINUS 1940 HERTZ.
1941	THE FREQUENCY DEVIATION SHALL BE NOT GREATER THAN OR MINUS 1941 KILOHERTZ.
1942	THE MODULATION SENSITIVITY SHALL BE 1942 VOLT(S) RMS PER ONE KILOHERTZ DEVIATION.
1943	THE MODULATION FREQUENCY ERROR SHALL BE NOT GREATER THAN 1943 HERTZ.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MODULATION CAPABILITY (CONT)	
CONSTANT AMPLIFIER PEAK LEVEL ABOVE CLIPPING LEVEL	
(DB)	1944
*+ OR - (DB)	1945
MINIMUM MODULATION INDEX (NO.)	1946
DUTY CYCLE(SELECT ONE)	
HF (PCT)	1947
UHF (PCT)	1948
TONE SWEEP	
UPPER LEVEL FROM (HZ)	1949
*+ OR - (HZ)	1950
LOWER LEVEL FROM (HZ)	1951
*+ OR - (HZ)	1952
RATE (SWEEPS PER SECOND)	1953
INCREASE IN CARRIER FREQUENCY PLUS (PERCENT)	1954
DECREASE IN CARRIER FREQUENCY MINUS (PERCENT)	1955
NO VARIATION IN POWER OUTPUT TO VARIATION IN SPEECH INTENSITY.	1956

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1944 1945	A CONSTANT AMPLIFIER PEAK LEVEL ABOVE CLIPPING LEVEL SHALL BE 1944 DECIBEL(S) PLUS OR MINUS 1945 Decibel
1946	THE MODULATION INDEX SHALL BE NOT LESS THAN 1946.
1947	THE CARRIER ON-TIME DUTY CYCLE SHALL BE 1947 PERCENT OF THE CYCLE ON HIGH FREQUENCY.
1948	THE CARRIER ON-TIME DUTY CYCLE SHALL BE 1948 PERCENT OF THE CYCLE ON ULTRA HIGH FREQUENCY.
1949 1950	THE RECTANGULAR AUDIO MODULATING WAVE SHALL SWEEP IN TONE FROM AN UPPER LEVEL OF 1949 HERTZ PLUS OR MINUS 1950 HERTZ.
1951 1952	THE RECTANGULAR AUDIO MODULATING WAVE SHALL SWEEP IN TONE TO A LOWER LEVEL OF 1951 HERTZ PLUS OR MINUS 1952 HERTZ .
1953	THE SWEEP RATE SHALL BE 1953 SWEEPS PER SECOND.
1954	UPON APPLICATION OF DC VOLTS TO THE DATA INPUT TERMINALS, THE CARRIER FREQUENCY SHALL BE INCREASED BY PLUS 1954 PERCENT.
1955	UPON APPLICATION OF DC VOLTS TO THE DATA INPUT TERMINALS, THE CARRIER FREQUENCY SHALL BE DECREASED BY MINUS 1955 PERCENT.
1956	THERE SHALL BE NO VARIATION IN POWER OUTPUT DUE TO VARIATION IN SPEECH INTENSITY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MODULATION CAPABILITY (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1912
PER DOCUMENT (DOC DES)	1913
RF INPUT SIGNAL AMPLITUDE	
(MICROVRMS)	1914
MODULATION FREQUENCY (SELECT ONE)	
(HZ)	1915
*+ OR - (HZ)	1916
(KHZ)	1917
*+ OR - (HZ)	1918
MODULATION FREQUENCY RANGE	
FROM (HZ)	1919
*TO (KHZ)	1920
CHANNEL IDENTIFICATION (DES)	1921
MODULATION (PCT)	1922
VARIATION OF INPUT LEVELS	
FROM - (DB)	1923
*TO + (DB)	1924
REFERENCE ZERO DB (W)	1925
AUDIO INPUT (W)	1926

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1912	MODULATION CAPABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1912.
1913	MODULATION CAPABILITY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1913.
1914	THE RF INPUT SIGNAL VOLTAGE AMPLITUDE SHALL BE 1914 MICROVOLT(S) RMS.
1915 1916	THE MODULATION FREQUENCY SHALL BE 1915 HERTZ PLUS OR MINUS 1916 HERTZ.
1917 1918	THE MODULATION FREQUENCY SHALL BE 1917 KILOHERTZ PLUS OR MINUS 1918 HERTZ.
1919 1920	THE MODULATION FREQUENCY RANGE SHALL BE FROM 1919 HERTZ TO 1920 KILOHERTZ.
1921	THE FREQUENCIES SHALL BE ON CHANNEL 1921.
1922	THE CARRIER MODULATION SHALL BE 1922 PERCENT UPON APPLICATION OF AN AUDIO SIGNAL.
1923 1924	THE INPUT POWER VARIATIONS SHALL BE FROM MINUS 1923 DECIBEL(S) TO PLUS 1924 DECIBEL(S).
1925	THE REFERENCE INPUT POWER SHALL BE 1925 WATT(S) AT ZERO DECIBELS.
1926	THE AUDIO INPUT POWER SHALL BE 1926 WATT(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MODULATION CAPABILITY (CONT)	
INPUT VOLTAGE (SELECT ONE)	
(MVRMS)	1927
(VRMS)	1928
+(VDC)	1929
-(VDC)	1930
INPUT IMPEDANCE (OHM)	1931
IMPEDANCE LINE BALANCE (SELECT ONE)	
BALANCED.	1932
UNBALANCED.	1933
SUBCARRIER OSCILLATORS (QTY)	1910
MOISTURE RESISTANCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1400
NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.	1396
REMAIN WITHIN SPECIFIED TOLERANCE.	1398
NO EVIDENCE OF ARCING, FLASHOVER, OR INSULATION BREAKDOWN WHEN DWV APPLIED.	1394

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1927	THE AUDIO INPUT VOLTAGE SHALL BE 1927 MILLIVOLT(S) RMS.
1928	THE AUDIO INPUT VOLTAGE SHALL BE 1928 VOLTS(S) RMS.
1929	THE VOLTAGE APPLIED TO THE DATA INPUT TERMINALS SHALL BE PLUS 1929 VOLT(S) DC.
1930	THE VOLTAGE APPLIED TO THE DATA INPUT TERMINALS SHALL BE MINUS 1930 VOLT(S) DC.
1931	THE AUDIO INPUT IMPEDANCE SHALL BE 1931 OHM(S).
1932	THE INPUT IMPEDANCE SHALL BE FROM A BALANCED LINE.
1933	THE INPUT IMPEDANCE SHALL BE FROM AN UNBALANCED LINE.
1910	THE NUMBER OF SUBCARRIER OSCILLATORS SHALL BE 1910.
1400	MOISTURE RESISTANCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1400.
1396	MOISTURE RESISTANCE. THERE SHALL BE NO EVIDENCE OF CORROSION OR PHYSICAL DAMAGE.
1398	ITEMS SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1394	THERE SHALL BE NO EVIDENCE OF FLASHOVER, MECHANICAL DAMAGE, ARCING OR INSULATION BREAKDOWN, WHEN DIELECTRIC WITHSTANDING VOLTAGE IS APPLIED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
MAXIMUM LEAKAGE AT HIGH HUMIDITY (MA)	1429
MAXIMUM LEAKAGE AFTER DRYING (MA)	1404
MINIMUM INSULATION RESISTANCE AT HIGH HUMIDITY (MEGOHMS)	1432
MINIMUM INSULATION RESISTANCE AFTER DRYING (MEGOHMS)	1406
DESIGN PERFORMANCE REQUIREMENTS DURING MOISTURE RESISTANCE TEST.	
FREQUENCY STABILITY.	1963
POWER OUTPUT.	1964
DISTORTION.	1965
FREQUENCY RESPONSE.	1966
HUM AND NOISE.	1967
KEYING.	1968
LINEARITY.	1969

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1429	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1429 MILLIAMPERE(S) AT HIGH HUMIDITY.
1404	CURRENT LEAKAGE SHALL BE NOT GREATER THAN 1404 MILLIAMPERE(S) AFTER DRYING.
1432	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1432 MEGOHMS AT HIGH HUMIDITY.
1406	INSULATION RESISTANCE SHALL BE NOT LESS THAN 1406 MEGOHMS AFTER DRYING.
1963	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1964	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
1965	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1966	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
1967	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
1968	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
1969	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
MODULATION CAPABILITY.	1970
SPURIOUS EMISSIONS.	1971
DESIGN PERFORMANCE REQUIREMENTS AFTER MOISTURE RESISTANCE TEST.	
FREQUENCY STABILITY.	2727
POWER OUTPUT.	2728
DISTORTION.	2729
FREQUENCY RESPONSE.	2730
HUM AND NOISE.	2731
KEYING.	2732
LINEARITY.	2733
MODULATION CAPABILITY.	2734
SPURIOUS EMISSIONS.	2735

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1970	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
1971	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.
2727	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2728	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2729	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2730	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2731	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2732	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER THE TEST.
2733	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2734	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2735	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOISTURE RESISTANCE (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1391
PER MIL-STD-202, METHOD 1060	1397
LOADING VOLTAGE (SELECT ONE)	
(VDC)	4981
(VAC)	4980
STEP 7A NOT APPLICABLE.	4985
STEP 7B NOT APPLICABLE.	4986
MOUNT PER DOCUMENT (DOC DES)	1449
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.	4983
PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.	4984
SPECIAL PREPARATION PER DOCUMENT (DOC DES)	2186

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1391	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1391.
1397	MOISTURE RESISTANCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 106 OF MIL-STD-202.
4981	LOADING VOLTAGE SHALL BE 4981 VOLTS, DC.
4980	LOADING VOLTAGE SHALL BE 4980 VOLTS, AC.
4985	STEP 7A OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
4986	STEP 7B OF METHOD 106 OF MIL-STD-202 IS NOT APPLICABLE.
1449	MOUNTING SHALL BE IN ACCORDANCE WITH 1449.
4983	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AT HIGH HUMIDITY.
4984	PERFORM DIELECTRIC WITHSTANDING VOLTAGE TEST AFTER DRYING.
2186	SPECIAL PREPARATION SHALL BE IN ACCORDANCE WITH 2186.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT	
REQUIREMENTS	
PER BASE DOCUMENT, EXCEPT____	1974
POWER RESPONSES (POWER OUTPUT TABLE)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH

1974 POWER OUTPUT. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1974.

POWER OUTPUT. THE POWER RESPONSES SHALL BE IN ACCORDANCE WITH THE POWER OUTPUT TABLE.

POWER OUTPUT TABLE

REF NO.	CONDITION	CHAN	EMIS CLASS	MODE	APPLIED SIGNAL VOLTAGE PLRT AND VAL	UNITS	PCT TOL	APPLIED CURRENT VAL	UNITS
1	2400	2401	2402	2403	2404	2405	2406	2407	2408
2	2409	2410	2411	2412	2413	2414	2415	2416	2417
3	2418	2419	2420	2421	2422	2423	2424	2425	2426
4	2427	2428	2429	2430	2431	2432	2433	2434	2435
5	2436	2437	2438	2439	2440	2441	2442	2443	2444
6	2445	2446	2447	2448	2449	2450	2451	2452	2453
7	2454	2455	2456	2457	2458	2459	2460	2461	2462
8	2463	2464	2465	2466	2467	2468	2469	2470	2471
9	2472	2473	2474	2475	2476	2477	2478	2479	2480
10	2481	2482	2483	2484	2485	2486	2487	2488	2489

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT (CONT)	
POWER RESPONSES (POWER CUTPUT TABLE) (CONT)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE STANDARD PARAGRAPH

POWER OUTPUT TABLE (CONT)

REF NO.	APPLIED FREQUENCY DISCREET VAL	UNITS	TO L +OR- (HZ)	RANGE FROM VAL	UNITS	TO VAL	UNITS	LOAD (OHM)	TYPE	MAX VSWR
1	2490	2491	2492	2493	2494	2495	2496	2497	2498	2499
2	2500	2501	2502	2503	2504	2505	2506	2507	2508	2509
3	2510	2511	2512	2513	2514	2515	2516	2517	2518	2519
4	2520	2521	2522	2523	2524	2525	2526	2527	2528	2529
5	2530	2531	2532	2533	2534	2535	2536	2537	2538	2539
6	2540	2541	2542	2543	2544	2545	2546	2547	2548	2549
7	2550	2551	2552	2553	2554	2555	2556	2557	2558	2559
8	2560	2561	2562	2563	2564	2565	2566	2567	2568	2569
9	2570	2571	2572	2573	2574	2575	2576	2577	2578	2579
10	2580	2581	2582	2583	2584	2585	2586	2587	2588	2589

POWER OUTPUT TABLE (CONT)

REF NO.	RESPONSE MINIMUM POWER VAL	UNITS	PCT TOL	MAX VAR +OR- (DB)	MAXIMUM TUNE-UP TIME (SEC)
1	2590	2591	2592	2593	2594
2	2595	2596	2597	2598	2599
3	2600	2601	2602	2603	2604
4	2605	2606	2607	2608	2609
5	2610	2611	2612	2613	2614
6	2615	2616	2617	2618	2619
7	2620	2621	2622	2623	2624
8	2625	2626	2627	2628	2629
9	2630	2631	2632	2633	2634
10	2635	2636	2637	2638	2639

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:02Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT (CONT)	
MAXIMUM POWER OUTPUT LEVEL CHANGE	
WITHIN ANY BAND (DB)	1980
OVER ENTIRE FREQUENCY RANGE (DB)	1981
WITH MAXIMUM CARRIER SUPPRESSION (DB)	1982
SIDEBAND OUTPUT EQUALIZATION	
MAXIMUM POWER OUTPUT CHANGE (DB)	1983
MAXIMUM PEAK ENVELOPE POWER OUTPUT BEFORE LIMITING OCCURS (MW)	1984
MAXIMUM POWER DRAIN IN STANDBY CONDITION (W)	1985
CARRIER SUPPRESSION	
MINIMUM (DB)	1986
*BELOW POWER LEVEL (MW)	1987
MAXIMUM CARRIER COMPRESSION (BD)	1988

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1980	THE POWER OUTPUT LEVEL CHANGE DUE ONLY TO CHANGE IN THE SELECTED OUTPUT FREQUENCY WITHIN ANY BAND SHALL BE NOT GREATER THAN 1980 DECIBEL (S).
1981	THE POWER OUTPUT LEVEL CHANGE DUE ONLY TO CHANGE IN THE SELECTED OUTPUT FREQUENCY OVER THE ENTIRE FREQUENCY RANGE SHALL BE NOT GREATER THAN 1981 DECIBEL (S).
1982	THE POWER OUTPUT LEVEL CHANGE WITH MAXIMUM CARRIER SUPPRESSION SHALL BE NOT GREATER THE 1982 DECIBEL (S).
1983	THE POWER OUTPUT CHANGE SHALL NOT BE GREATER THAN 1983 DECIBEL (S) WHEN SWITCHING FROM ONE SIDEBAND TO ANOTHER.
1984	THE PEAK POWER OUTPUT ENVELOPE SHALL BE NOT GREATER THAN 1984 MILLIWATT(S) BEFORE LIMITING OCCURS.
1985	THE POWER DRAIN OF THE TRANSMITTER SHALL BE NOT GREATER THAN 1985 WATT(S) WHILE IN A STANDBY CONDITION.
1986 1987	THE SUPPRESSION OF THE CARRIER SHALL BE NOT LESS THAN 1986 DECIBEL (S) BELOW THE AVERAGE POWER OF A SINGLE TONE SIGNAL OUTPUT OF 1987 MILLIWATT (S).
1988	THE CARRIER LEVEL COMPRESSION SHALL BE NOT GREATER THAN 1988 DECIBEL (S) AT ANY POWER LEVEL FROM ZERO TO FULL RATED POWER OUTPUT AT 20 DB CARRIER SUPPRESSION.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
POWER OUTPUT (CONT)	
HARMONIC SUPPRESSION	
SECOND HARMONIC OUTPUT REDUCED	
MINIMUM (DB)	1989
*BELOW POWER LEVEL (MW)	1990
OTHER HARMONIC OUTPUT REDUCED	
MINIMUM (DB)	1991
*BELOW POWER LEVEL (MW)	1992
OPPOSITE SIDEBAND FREQUENCY SUPPRESSION	
MINIMUM (DB)	1993
*BELOW POWER LEVEL (MW)	1994
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT_____	1975
PER DOCUMENT (DOC DES)	1976
AVERAGE AND PEAK POWER CONTROL VOLTAGES NOT APPLIED.	1977
LEVELING	
VOLTAGE LIMITING LEVEL (MW)	1978
FIXED APC VOLTAGE (VDC)	1979

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1989 1990	THE SECOND HARMONIC OUTPUT SHALL BE REDUCED NOT LESS THAN 1989 DECIBELS(S) BELOW A SINGLE TONE OUTPUT OF 1990 MILLIWATTS(S).
1991 1992	ALL HARMONICS OTHER THAN THE SECOND SHALL BE REDUCED NOT LESS THAN 1991 DECIBEL(S) BELOW A SINGLE TONE OUTPUT OF 1992 MILLIWATT(S).
1993 1994	THE OPPOSITE SIDEBAND FREQUENCY LEVEL SHALL BE SUPPRESSED NOT LESS THAN 1993 DECIBEL(S) BELOW THE LEVEL OF A SINGLE TONE OUTPUT OF 1994 MILLIWATT(S).
1975	POWER OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1975.
1976	POWER OUTPUT. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 1976.
1977	THE AVERAGE AND PEAK POWER CONTROL VOLTAGES SHALL NOT BE APPLIED DURING POWER OUTPUT MEASUREMENTS.
1978	THE RF OUTPUT POWER OF 1978 MILLIWATT(S) SHALL BE HELD BELOW THE VOLTAGE LIMITING LEVEL DURING ADJUSTMENT OF THE DC BIAS VOLTAGE.
1979	AT A STABLE OPERATING TEMPERATURE, THE RF OUTPUT POWER SHALL BE MEASURED WITH THE AVERAGE POWER CONTROL VOLTAGE HELD CONSTANT WITHIN 1979 VOLT(S) DC.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RADIO INTERFERENCE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2014
LIMITS PER MIL-STD-461.	2015
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2006
AS FOLLOWS:	2825
PER MIL-STD-461, APPENDIX TABLE A (NO.)	2007
PER METHOD DESIGNATION PER MIL-STD-462	
CE.	2008
RE.	2009
CS.	2010
RS.	2011
CRE.	2012

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2014	RADIO INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2014.
2015	RADIO INTERFERENCE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH MIL-STD-461.
2006	RADIO INTERFERENCE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2006.
2825	RADIO INTERFERENCE. TESTING SHALL BE PERFORMED AS FOLLOWS:
2007	TESTING SHALL BE PERFORMED IN ACCORDANCE WITH MIL-STD-461, APPENDIX TABLE A 2007. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE FOLLOWING PROCEDURE(S) OF MIL-STD-462.
2008	PROCEDURE CE SHALL APPLY.
2009	PROCEDURE RE SHALL APPLY.
2010	PROCEDURE CS SHALL APPLY.
2011	PROCEDURE RS SHALL APPLY.
2012	PROCEDURE CRE SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RANDOM DROP	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4967
NO EVIDENCE OF PHYSICAL DAMAGE.	4968
DESIGN PERFORMANCE REQUIREMENTS AFTER RANDOM DROP TEST.	
FREQUENCY STABILITY.	2020
POWER OUTPUT.	2021
DISTORTION.	2022
FREQUENCY RESPONSE.	2023
HUM AND NOISE.	2024
KEYING.	2025
LINEARITY.	2026
MODULATION CAPABILITY.	2027
SPURIOUS EMISSIONS.	2028

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4967	RANDOM DROP. REQUIREMENT(S) SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4967.
4968	RANDOM DROP. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE OR DEGRADATION OF PERFORMANCE.
2020	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2021	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2022	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2023	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2024	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2025	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST .
2026	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2027	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2028	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
RANDOM DROP (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4963
PER MIL-STD-202, METHOD 203.	4972
SALT SPRAY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4878
NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE.	4782
DESIGN PERFORMANCE REQUIREMENTS AFTER SALT SPRAY TEST.	
FREQUENCY STABILITY.	2030
POWER OUTPUT.	2031
DISTORTION.	2032
FREQUENCY RESPONSE.	2033
HUM AND NOISE.	2034
KEYING.	2035

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4963	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4963.
4972	RANDOM DROP. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 203 OF MIL-STD-202.
4878	SALT SPRAY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4878.
4782	SALT SPRAY. THERE SHALL BE NO EVIDENCE OF CORROSION, PHYSICAL DAMAGE, OR DEGRADATION OF PERFORMANCE.
2030	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2031	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2032	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2033	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2034	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2035	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SALT SPRAY (CONT)	
LINEARITY.	2036
MODULATION CAPABILITY.	2037
SPURIOUS EMISSIONS.	2038
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4770
PER MIL-STD-202, METHOD 101	4771
TEST CONDITION (LETTER)	4772
MOUNTING (SELECT ONE)	
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4773
MOUNTING SHALL BE BY NORMAL METHOD.	4765
MOUNTING SHALL BE BY ANY SUITABLE MEHTOD.	4766
SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	7315
NO EVIDENCE OF PHYSICAL DAMAGE.	7316
DESIGN PERFORMANCE REQUIREMENTS AFTER SHOCK TEST.	
FREQUENCY STABILITY.	2040
POWER OUTPUT.	2041

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2036	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2037	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2038	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
4770	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4770.
4771	SALT SPRAY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 101 OF MIL-STD-202.
4772	TEST CONDITION LETTER 4772 SHALL APPLY.
4773	MOUNTING SHALL BE IN ACCORDANCE WITH 4773.
4765	MOUNTING SHALL BE BY THE NORMAL METHOD.
4766	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
7315	SHOCK. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7315.
7316	SHOCK. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2040	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2041	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
DISTORTION.	2042
FREQUENCY RESPONSE.	2043
HUM AND NOISE.	2044
KEYING.	2045
LINEARITY	2046
MODULATION CAPABILITY.	2047
SPURIOUS EMISSIONS.	2048
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	7311
PER MIL-STD-810, METHOD 516.	7312
PROCEDURE (SELECT ONE)	
PROCEDURE I.	7313
FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	7317
FIGURE 516-2 APPLIES	7318

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2042	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2043	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2044	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2045	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2046	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2047	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2048	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
7311	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 7311.
7312	SHOCK. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 516 OF MIL-STD-810.
7313	PROCEDURE NUMBER I SHALL APPLY.
7317	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
7318	THE SHOCK PLUSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
AMPLITUDE (A OR B) (LETTER)	7305
DURATION (C OR D) (LETTER)	7306
PROCEDURE II.	6327
PROCEDURE III.	6338
FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6339
FIGURE 516-2 APPLIES.	6340
AMPLITUDE (A OR B) (LETTER)	6341
DURATION (C OR D) (LETTER)	6342
PROCEDURE IV.	6343
FIGURE (SELECT ONE)	
FIGURE 516-1 APPLIES.	6344
FIGURE 516-2 APPLIES.	6345
AMPLITUDE (A OR B) (LETTER)	6346
DURATION (T OR D) (LETTER)	6347

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
7305	AMPLITUDE LETTER 7305 SHALL APPLY.
7306	DURATION LETTER 7306 SHALL APPLY.
6327	PROCEDURE NUMBER II SHALL APPLY.
6338	PROCEDURE NUMBER III SHALL APPLY,
6339	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6340	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6341	AMPLITUDE LETTER 6341 SHALL APPLY.
6342	DURATION LETTER 6342 SHALL APPLY.
6343	PROCEDURE NUMBER IV SHALL APPLY.
6344	THE SHOCK PULSE SHAPE SHALL BE SAWTOOTH IN ACCORDANCE WITH FIGURE 516-1 OF METHOD 516 OF MIL-STD-810.
6345	THE SHOCK PULSE SHAPE SHALL BE HALF SINE WAVE IN ACCORDANCE WITH FIGURE 516-2 OF METHOD 516 OF MIL-STD-810.
6346	AMPLITUDE LETTER 6346 SHALL APPLY.
6347	DURATION LETTER 6347 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SHOCK (CONT)	
PROCEDURE V.	6348
PROCEDURE VI.	6349
TEST TEMPERATURE IF OTHER THAN AMBIENT (DEGREES CELSIUS)	7307
TEMPERATURE TOLERANCE (DEGREES CELSIUS)	7308
OPERATION DURING TEST REQUIRED.	7309
PERCENT RATED LOAD APPLIED (PERCENT)	6204
MOUNT PER DOCUMENT (DOC DES)	2187
SPECIAL PREPARATIONS PER DOCUMENT (DOC DES)	2188
SPURIOUS EMISSIONS	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2058
AS FOLLOWS:	2830
MINIMUM ATTENUATION OF HARMONIC FREQUENCIES BELOW FULL POWER OUTPUT (DB)	2059

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6348	PROCEDURE NUMBER V SHALL APPLY.
6349	PROCEDURE NUMBER VI SHALL APPLY.
7307	THE TEST TEMPERATURE SHALL BE 7307 DEGREES CELSIUS.
7308	THE TEST TEMPERATURE TOLERANCE SHALL BE WITHIN 7308 DEGREES CELSIUS.
7309	OPERATION DURING THE TEST IS REQUIRED.
6204	THE ELECTRICAL LOAD SHALL BE 6204 PERCENT OF THE RATED LOAD.
2187	MOUNTING SHALL BE IN ACCORDANCE WITH 2187.
2188	SPECIAL PREPARATIONS SHALL BE IN ACCORDANCE WITH 2188.
2058	SPURIOUS EMISSIONS. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2058.
2830	SPURIOUS EMISSIONS. THE REQUIREMENTS SHALL BE AS FOLLOWS:
2059	THE ATTENUATION OF SPURIOUS HARMONICS APPEARING AT THE OUTPUT SHALL BE NOT LESS THAN 2059 DECIBEL(S) BELOW FULL POWER OUTPUT OF THE TRANSMITTER.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPURIOUS EMISSIONS (CONT)	
OUT-OF-BAND OUTPUTS REDUCED.	
MINIMUM DECIBELS BELOW SINGLE TONE OUTPUT (DB)	2060
LEVEL (SELECT ONE)	
(MW)	2061
(W)	2062
MINIMUM DECIBELS BELOW LEVEL OF OPERATING FREQUENCY (DB)	2063
EMISSION FREQUENCY REMOVED FROM CARRIER FREQUENCY.	
MINIMUM ATTENUATION BELOW CARRIER LEVEL (DB)	2064
*MINIMUM PERCENT OF BANDWIDTH (PCT)	2065
MINIMUM DECIBELS BELOW SINGLE TONE OUTPUT (DB)	2066
LEVEL (SELECT ONE)	
(MW)	2067
(W)	2068

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2060	THE ATTENUATION SHALL BE NOT LESS THAN 2060 DECIBEL(s) FOR OUT-OF-BAND OUTPUTS.
2061	BELOW A SINGLE TONE OUTPUT OF 2061 MILLIWATT(S) FOR ALL OUT-OF-BAND SPURIOUS EMISSIONS.
2062	BELOW A SINGLE TONE OUTPUT OF 2062 WATT(S) FOR ALL OUT-OF-BAND SPURIOUS EMISSIONS.
2063	THE ATTENUATION OF ALL OUT-OF-BAND SPURIOUS EMISSIONS SHALL BE NOT LESS THAN 2063 DECIBEL(S) BELOW THE LEVEL OF OPERATING FREQUENCY.
2064 2065	THE ATTENUATION SHALL BE NOT LESS THAN 2064 DECIBEL(S) BELOW THE CARRIER LEVEL FOR ANY EMISSION FREQUENCY REMOVED FROM THE CARRIER FREQUENCY NOT LESS THAN 2065 PERCENT OF THE BANDWIDTH.
2066	ATTENUATION SHALL BE NOT LESS THAN 2066 DECIBEL(S) BELOW SINGLE TONE OUTPUT.
2067	BELOW A SINGLE TONE OUTPUT OF 2067 MILLIWATT(S) FOR IN-BAND SPURIOUS EMISSIONS WHICH FALL WITHIN THE INTELLIGENCE BAND.
2068	BELOW A SINGLE TONE OUTPUT OF WATT(S) FOR IN-BAND SPURIOUS EMISSIONS WHICH FALL WITHIN THE INTELLIGENCE BAND.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
SPURIOUS EMISSIONS (CONT)	
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2051
PER DOCUMENT (DOC DES)	2052
OPERATING FREQUENCY (SELECT ONE)	
(KHZ)	2053
(MHZ)	2054
FREQUENCY SEARCH RANGE	
FROM (KHZ)	2055
*TO (MHZ)	2056
TEMPERATURE, ALTITUDE	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2176
NO PHYSICAL DAMAGE.	2177
REMAIN WITHIN SPECIFIED TOLERANCE.	2178
NO DISCONTINUITY DURING TEST.	2179

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2051	SPURIOUS EMISSIONS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2051.
2052	SPURIOUS EMISSIONS. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH 2052.
2053	THE TRANSMITTER OPERATING FREQUENCY SHALL BE 2053 KILOHERTZ.
2054.	THE TRANSMITTER OPERATING FREQUENCY SHALL BE 2054 MEGAHERTZ.
2055 2056	THE SPURIOUS OUTPUT SEARCH RANGE SHALL BE FROM 2055 KILOHERTZ TO 2056 MEGAHERTZ.
2176	TEMPERATURE ALTITUDE. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2176.
2177	TEMPERATURE ALTITUDE. THERE SHALL BE NO PHYSICAL DAMAGE.
2178	THE DEVICE SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2179	THERE SHALL BE NO DISCONTINUITY DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, ALTITUDE (CONT)	
DESIGN PERFORMANCE REQUIREMENTS DURING TEMPERATURE ALTITUDE TEST:	
FREQUENCY STABILITY.	2069
POWER OUTPUT.	2070
DISTORTION.	2071
FREQUENCY RESPONSE.	2072
HUM AND NOISE.	2073
KEYING.	2074
LINEARITY.	2075
MODULATION CAPABILITY.	2076
SPURIOUS EMISSIONS.	2077
DESIGN PERFORMANCE REQUIREMENTS AFTER TEMPERATURE ALTITUDE TEST.	
FREQUENCY STABILITY.	2736
POWER OUTPUT.	2737
DISTORTION.	2738

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2069	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2070	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
2071	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2072	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2073	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2074	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST l
2075	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2076	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2077	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.
2736	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2737	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2738	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, ALTITUDE (CONT)	
FREQUENCY RESPONSE.	2739
HUM AND NOISE.	2740
KEYING.	2741
LINEARITY.	2742
MODULATION CAPABILITY.	2743
SPURIOUS EMISSIONS.	2744
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	2171
PER MIL-STD-810, METHOD 504.	2172
DURATION OF OPERATION AND MEASUREMENTS (HR)	2173
EQUIPMENT CATEGORY (DES)	2174

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2739	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2740	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2741	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2742	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
274,3	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2744	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2171	TEMPERATURE ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 2171.
2172	TEMPERATURE ALTITUDE. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 504 OF MIL-STD-810.
2173	OPERATION AND MEASUREMENT SHALL REQUIRE 2173 HOUR(S).
2174	CATEGORY 2174 SHALL APPLY.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	6228
NO EVIDENCE OF PHYSICAL DAMAGE.	6229
DESIGN PERFORMANCE REQUIREMENTS DURING HIGH TEMPERATURE TEST.	
FREQUENCY STABILITY.	2080
POWER OUTPUT.	2081
DISTORTION.	2082
FREQUENCY RESPONSE.	2083
HUM AND NOISE.	2084
KEYING.	2085
LINEARITY.	2086
MODULATION CAPABILITY.	2087
SPURIOUS EMISSIONS.	2088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6228	TEMPERATURE, HIGH. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6228.
6229	TEMPERATURE, HIGH. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2080	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2081	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
2082	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2083	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2084	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2085	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2086	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2087	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2088	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARCTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
DESIGN PERFORMANCE REQUIREMENTS AFTER HIGH TEMPERATURE TEST.	
FREQUENCY STABILITY.	2745
POWER OUTPUT.	2746
DISTORTION.	2747
FREQUENCY RESPONSE.	2748
HUM AND NOISE.	2749
KEYING.	2750
LINEARITY.	2751
MODULATION CAPABILITY.	2752
SPURIOUS EMISSIONS.	2753
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	6217
PER MIL-STD-810, METHOD 501.	6218

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2745	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2746	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2747	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2748	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2749	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2750	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2751	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2752	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2753	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER THE TEST.
6217	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6217.
6218	TEMPERATURE, HIGH. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 501 OF MIL-STD-810.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, HIGH (CONT)	
PROCEDURE (ROMAN NUMERAL)	6219
STORAGE TEMPERATURE (DEGREES CELSIUS)	6220
STORAGE DURATION (HOURS)	6221
HIGHEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6222
OPERATION TIME (SELECT ONE)	
(MIN)	6224
(HR)	6225
TEMPERATURE, LOW	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	6318
NO EVIDENCE OF PHYSICAL DAMAGE,	6319
DESIGN PERFORMANCE REQUIREMENTS DURING LOW TEMPERATURE TEST,	
FREQUENCY Stability	2091
POWER OUTPUT.	2092
DISTORTION.	2093
FREQUENCY RESPONSE.	2094

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
6219	PROCEDURE NUMBER 6219 SHALL APPLY.
6220	STORAGE TEMPERATURE SHALL BE 6220 DEGREES CELSIUS.
6221	STORAGE DURATION SHALL BE 6221 HOURS.
6222	HIGHEST OPERATING TEMPERATURE SHALL BE 6222 DEGREES CELSIUS.
6224	OPERATING TIME SHALL BE 6224 MINUTE(S).
6225	OPERATING TIME SHALL BE 6225 HOUR(S).
6318	TEMPERATURE, LOW. THE REQUIREMENTS SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6318.
6319	TEMPERATURE, LOW. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
2091	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2092	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
2093	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2094	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
HUM AND NOISE.	2095
KEYING.	2096
LINEARITY.	2097
MODULATION CAPABILITY.	2098
SPURIOUS EMISSIONS.	2099
DESIGN PERFORMANCE REQUIREMENTS AFTER LOW TEMPERATURE TEST.	
FREQUENCY STABILITY.	2754
POWER OUTPUT.	2755
DISTORTION.	2756
FREQUENCY RESPONSE.	2757
HUM AND NOISE.	2758
KEYING.	2759
LINEARITY.	2760

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2095	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2096	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2097	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2098	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2099	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.
2754	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2755	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2756	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2757	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2758	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2759	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2760	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARCTERISTIC NAME	CHAR CODE
TEMPERATURE, LOW (CONT)	
MODULATION CAPABILITY.	2761
SPURIOUS Emissions	2762
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	6231
PER MIL-STD-810, METHOD 502.	6232
STORAGE TEMPERATURE (DEGREES CELSIUS)	6234
STORAGE DURATION (HOURS)	6235
LOWEST OPERATING TEMPERATURE (DEGREES CELSIUS)	6236
CHAMBER AIR VELOCITY (SELECT ONE)	
(FT/S)	6237
(M/S)	6238
OPERATION TIME (SELECT ONE)	
(MIN)	6315
(HR)	6316

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2761	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2762	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER THE TEST.
6231	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 6231.
6232	TEMPERATURE, LOW. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 502 OF MIL-STD-810.
6234	STORAGE TEMPERATURE SHALL BE 6234 DEGREES CELSIUS.
6235	STORAGE DURATION SHALL BE 6235 HOURS.
6236	LOWEST OPERATING TEMPERATURE SHALL BE 6235 DEGREES CELSIUS.
6237	CHAMBER AIR VELOCITY SHALL BE 6237 FEET PER SECOND.
6238	CHAMBER AIR VELOCITY SHALL BE 6238 METERS PER SECOND.
6315	OPERATING TIME SHALL BE 6315 MINUTE(S).
6316	OPERATING TIME SHALL BE 6316 HOURS(S).

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4722
NO EVIDENCE OF PHYSICAL DAMAGE.	4723
REMAIN WITHIN SPECIFIED TOLERANCE.	4726
DESIGN PERFORMANCE REQUIREMENTS DURING THERMAL SHOCK TEST.	
FREQUENCY STABILITY.	2100
POWER OUTPUT.	2101
DISTORTION.	2102
FREQUENCY RESPONSE.	2103
HUM AND NOISE.	2104
KEYING.	2105
LINEARITY.	2106
MODULATION CAPABILITY.	2107
SPURIOUS EMISSIONS.	2108

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4722	THERMAL SHOCK (TEMPERATURE CYCLING). THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 4722.
4723	THERMAL SHOCK (TEMPERATURE CYCLING). THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
4726	ITEMS SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
2100	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2101	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST l
2102	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2103	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2104	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2105	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2106	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2107	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2108	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 2026l0-23T21:02Z
Check the source to verify that this is the currentversion before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (CONT)	
DESIGN PERFORMANCE REQUIREMENTS AFTER THERMAL SHOCK TEST.	
FREQUENCY STABILITY.	2763
POWER OUTPUT.	2764
DISTORTION.	2765
FREQUENCY RESPONSE.	2766
HUM AND NOISE.	2767
KEYING.	2768
LINEARITY.	2769
MODULATION CAPABILITY.	2770
SPURIOUS EMISSIONS.	2771
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	4713
PER MIL-STD-202, METHOD 107.	4714

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2763	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2764	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2765	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2766	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2767	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2768	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST .
2769	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2770	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2771	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER THE TEST.
4713	THERMAL SHOCK (THERMAL CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT,EXCEPT 4731.
4714	THERMAL SHOCK (THERMAL CYCLING). TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 107 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
THERMAL SHOCK (CONT)	
TEST CONDITION (LETTER)	4715
SPECIAL MOUNTING PER DOCUMENT (DOC DES)	4719
VIBRATION, HIGH FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1455
NO EVIDENCE OF PHYSICAL DAMAGE.	1456
NO DISCONTINUITY DURING TEST.	1473
REMAIN WITHIN SPECIFIED TOLERANCE.	1469
VIBRATION RELATED AMPLITUDE MODULATION	
MAXIMUM PERCENT OF A SINGLE TONE RF OUTPUT (PCT)	2111
*RF OUTPUT (MW)	2112
DESIGN PERFORMANCE REQUIREMENTS DURING HIGH FREQUENCY TEST	
FREQUENCY STABILITY.	2113
POWER OUTPUT.	2114
DISTORTION.	2115
FREQUENCY RESPONSE.	2116
HUM AND NOISE.	2117

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
4715	TEST CONDITION LETTER 4715 SHALL APPLY.
4719	MOUNTING SHALL BE IN ACCORDANCE WITH 4719.
1455	VIBRATION, HIGH FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1455.
1456	VIBRATION, HIGH FREQUENCY. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1473	THERE SHALL BE NO DISCONTINUITY DURING TEST.
1469	ITEM(S) SHALL REMAIN WITHIN SPECIFIED Tolerance
2111 2112	VIBRATION RELATED AMPLITUDE MODULATION SHALL BE NOT GREATER THAN 2111 PERCENT OF A SINGLE TONE RF OUTPUT OF 2112 Milliwatt.
2113	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2114	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST .
2115	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2116	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2117	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
KEYING .	2118
LINEARITY.	2119
MODULATION CAPABILITY.	2120
SPURIOUS EMISSIONS.	2121
DESIGN PERFORMANCE REQUIREMENTS AFTER HIGH FREQUENCY VIBRATION TEST.	
FREQUENCY STABILITY.	2772
POWER OUTPUT.	2773
DISTORTION.	2774
FREQUENCY RESPONSE.	2775
HUM AND NOISE.	2776
KEYING.	2777
LINEARITY.	2778

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2118	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2119	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2120	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2121	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.
2772	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2773	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2774	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2775	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2776	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2777	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2778	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, HIGH FREQUENCY (CONT)	
MODULATION CAPABILITY.	2779
SPURIOUS EMISSIONS.	2780
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1446
PER MIL-STD-202, METHOD 204.	1447
TEST CONDITION (LETTER)	1448
PERCENT RATED LOAD APPLIED (PCT)	6200
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD.	4709
NORMAL MEANS.	4708
MOUNT PER DOCUMENT (DOC DES)	4707
METHOD OF DETERMINING MECHANICAL RESONANCE (SELECT ONE)	
VISUALLY BY MEANS OF A STROBOTAC.	1533
ELECTRICAL OUTPUT INDICATORS.	1534

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHAR CODE	STANDARD PARAGRAPH
2779	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2780	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
1446	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1446.
1447	VIBRATION, HIGH FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 204 OF MIL-STD-202.
1448	TEST CONDITION LETTER 1448 SHALL APPLY.
6200	THE LOAD SHALL BE 6200 PERCENT OF THE RATED LOAD.
4709	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4708	MOUNTING SHALL BE BY THE NORMAL METHOD.
4707	MOUNTING SHALL BE IN ACCORDANCE WITH 4707.
1533	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE VISUALLY BY MEANS OF A STROBOTAC.
1534	THE METHOD FOR DETERMINING MECHANICAL RESONANCE SHALL BE BY ELECTRICAL OUTPUT INDICATORS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1475
NO EVIDENCE OF PHYSICAL DAMAGE.	1476
REMAIN WITHIN SPECIFIED TOLERANCE.	1480
NO DISCONTINUITY DURING TEST.	1490
DESIGN PERFORMANCE REQUIREMENTS DURING LOW FREQUENCY VIBRATION TEST.	
FREQUENCY STABILITY.	2124
POWER OUTPUT.	2125
DISTORTION.	2126
FREQUENCY RESPONSE.	2127
HUM AND NOISE.	2128
KEYING.	2129
LINEARITY.	2130
MODULATION CAPABILITY.	2131
SPURIOUS EMISSIONS.	2132

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1475	VIBRATION, LOW FREQUENCY. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1475.
1476	VIBRATION, LOW FREQUENCY, THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1480	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1490	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2124	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2125	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
2126	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2127	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2128	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2129	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2130	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2131	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2132	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.

Source: https://assist.dla.mil -- Downloaded: 202640-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
DESIGN PERFORMANCE REQUIREMENTS AFTER LOW FREQUENCY VIBRATION TEST.	
FREQUENCY STABILITY.	2781
POWER OUTPUT.	2782
DISTORTION.	2783
FREQUENCY RESPONSE.	2784
HUM AND NOISE.	2785
KEYING.	2786
LINEARITY.	2787
MODULATION CAPABILITY.	2788
SPURIOUS Emissions	2789
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1466
PER MIL-STD-202, METHOD 201.	1467

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2781	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2782	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2783	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2784	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2785	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2786	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2787	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2788	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2789	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
1466	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT ~~1466~~.
1467	VIBRATION, LOW FREQUENCY. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 201 OF MIL-STD-202.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARCTERISTIC NAME	CHAR CODE
VIBRATION, LOW FREQUENCY	
DURATION OF VIBRATION PER AXIS (HR)	1470
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE MOUNTING METHOD,	4731
NORMAL MOUNTING MEANS.	4730
MOUNTING PER DOCUMENT (DOC DES)	4729
DIRECTION OF MOTION	
PARALLEL TO LONGITUDINAL AXIS.	1535
PERPENDICULAR TO LONGITUDINAL AXIS.	1536
ON THE CENTERLINE OF MOST SENSITIVE AXIS.	4979
VIBRATION, RANDOM	
REQUIREMENTS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1435
NO EVIDENCE OF PHYSICAL DAMAGE.	1436
REMAIN WITHIN SPECIFIED TOLERANCE.	1538
NO DISCONTINUITY DURING TEST.	1374
VIBRATION RELATED AMPLITUDE MODULATION	
MAXIMUM PERCENT OF A SINGLE TONE RF OUTPUT (PCT)	2135
*RF(MW)	2136

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1470	DURATION OF TEST SHALL BE 1470 HOUR(S) PER AXIS.
4731	MOUNTING SHALL BE ANY SUITABLE METHOD.
4730	MOUNTING SHALL BE BY THE NORMAL METHOD.
4729	MOUNTING SHALL BE IN ACCORDANCE WITH 4729.
1535	THE DIRECTION OF MOTION SHALL BE PARALLEL TO THE LONGITUDINAL AXIS.
1536	THE DIRECTION OF MOTION SHALL BE PERPENDICULAR TO THE LONGITUDINAL AXIS.
4979	THE DIRECTION OF MOTION SHALL BE ON THE CENTER LINE OF THE MOST SENSITIVE AXIS.
1435	VIBRATION, RANDOM. THE REQUIREMENT(S) SHALL BE IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1435.
1436	VIBRATION, RANDOM. THERE SHALL BE NO EVIDENCE OF PHYSICAL DAMAGE.
1538	ITEM(S) SHALL REMAIN WITHIN SPECIFIED TOLERANCE.
1374	THERE SHALL BE NO DISCONTINUITY DURING TEST.
2135 2136	VIBRATION RELATED AMPLITUDE MODULATION SHALL BE NOT GREATER THAN 2135 PERCENT OF A SINGLE TONE RF OUTPUT OF 2136 MILLIWATT(S).

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
DESIGN PERFORMANCE REQUIREMENTS DURING RANDOM VIBRATION TEST.	
FREQUENCY STABILITY.	2137
POWER OUTPUT.	2138
DISTORTION.	2139
FREQUENCY RESPONSE.	2140
HUM AND NOISE.	2141
KEYING.	2142
LINEARITY.	2143
MODULATION Capability	2144
SPURIOUS EMISSIONS.	2145
DESIGN PERFORMANCE REQUIREMENTS AFTER RANDOM VIBRATION TEST.	
FREQUENCY Stability	2790
POWER OUTPUT.	2791
DISTORTION.	2792

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2137	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2138	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED DURING TEST.
2139	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2140	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2141	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2142	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED DURING TEST.
2143	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED DURING TEST.
2144	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED DURING TEST.
2145	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED DURING THE TEST.
2790	FREQUENCY STABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2791	POWER OUTPUT OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2791	DISTORTION OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARCTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
FREQUENCY RESPONSE.	2793
HUM AND NOISE.	2794
KEYING.	2795
LINEARITY.	2796
MODULATION CAPABILITY.	2797
SPURIOUS EMISSIONS.	2798
TEST METHODS (SELECT ONE)	
PER BASE DOCUMENT, EXCEPT ____	1426
PER MIL-STD-202, METHOD 214.	1427
TEST CONDITION (ROMAN NUMERAL AND LETTER)	1428
DURATION OF APPLICATION (SELECT ONE)	
(MIN)	1438
(HR)	1431
MONITORING INSTRUMENTATION OF EXCITATION (SELECT ONE)	
ANY SUITABLE SYSTEM.	1452

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
2793	FREQUENCY RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2794	HUM AND NOISE IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2795	KEYING RESPONSE OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2796	LINEARITY OF THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
2797	MODULATION CAPABILITY OF THE DEVICE SHALL BE MEASURED AFTER TEST.
2798	SPURIOUS EMISSIONS IN THE OUTPUT SIGNAL SHALL BE MEASURED AFTER TEST.
1426	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH THE BASE DOCUMENT, EXCEPT 1426.
1427	VIBRATION, RANDOM. TESTING SHALL BE PERFORMED IN ACCORDANCE WITH METHOD 214 OF MIL-STD-202.
1428	TEST CONDITION LETTER 1428 APPLIES.
1438	THE DURATION OF THE TEST SHALL BE 1438 MINUTES.
1431	THE DURATION OF THE TEST SHALL BE 1431 HOURS.
1452	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE ANY SUITABLE INSTRUMENTATION SYSTEM.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
VIBRATION, RANDOM (CONT)	
CALIBRATED AC AND DC CONVERTER AND STRIP CHART RECORDER.	1453
CALIBRATED OSCILLOSCOPE.	1459
NUMBER OF VIBRATION MONITORING TEST POINTS (QTY)	1430
LOCATION OF MONITORING POINTS (SELECT ONE)	
ANY SUITABLE LOCATION.	1439
AS CLOSE AS PRACTICAL TO TEST SPECIMEN.	1462
PERCENT OF RATED LOAD APPLIED (PCT)	4678
METHOD OF MOUNTING (SELECT ONE)	
ANY SUITABLE METHOD.	4977
NORMAL MOUNTING METHOD.	4976
MOUNT PER DOCUMENT (DOC DES)	4975

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
1453	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE CALIBRATED AC TO DC CONVERTER AND STRIP CHART RECORDER.
1459	THE MONITORING INSTRUMENTATION OF THE VIBRATION EXCITATION SHALL BE A CALIBRATED OSCILLOSCOPE.
1430	THERE SHALL BE 1430 VIBRATION MONITORING POINTS.
1439	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE ANY SUITABLE LOCATION.
1462	THE LOCATION OF VIBRATION MONITORING POINTS SHALL BE AS CLOSE AS PRACTICAL TO THE TEST SPECIMEN(S).
4678	THE LOAD SHALL BE 4678 PERCENT OF THE RATED LOAD.
4977	MOUNTING SHALL BE BY ANY SUITABLE METHOD.
4976	MOUNTING SHALL BE BY THE NORMAL METHOD.
4975	MOUNTING SHALL BE IN ACCORDANCE WITH 4975.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
MOUNTING HARDWARE (SEE TABLE VIII, MIL-STD-35)	
NOTE: AUTOMATIC WHEN TABLE VIII IS USED.	
WORKMANSHIP	
(DOC DES)	6870
ADDITIONAL REQUIREMENTS	
A____	7001
B____	7002
c____	7003
D____	7004
E____	7005
PART MARKING (SELECT ONE)	
(DOC DES)	6372
MIL-STD-1285.	7630
MIL-STD-130.	7629

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	MOUNTING HARDWARE. MOUNTING HARDWARE IDENTIFIED IN THE FOLLOWING TABLE SHALL BE FURNISHED WITH EACH ITEM.
6870	WORKMANSHIP. WORKMANSHIP SHALL BE IN ACCORDANCE WITH 6870.
	ADDITIONAL REQUIREMENTS.
7001	(A) 7001.
7002	(B) 7002.
7003	(c) 7003.
7004	(D) 7004.
7005	(E) 7005.
6372	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH 6372, USING THE PART NUMBER AS THE IDENTIFYING NUMBER.
7630	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-1285.
7629	PART MARKING. PART IDENTIFICATION MARKING SHALL BE IN ACCORDANCE WITH MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

KEYWORD CODE INDEX (KCI)

CHARACTERISTIC NAME	CHAR CODE
ADDITIONAL PART MARKING	
A____	6991
B____	6992
C____	6993
D____	6994
E____	6995
DEFINITION OF HERMETIC SEALING	
NOTE: AUTOMATIC WHEN CODES ARE USED TO REQUIRE HERMETIC SEALING.	
APPLICABLE DOCUMENTS (SEE MIL-STD-35)	
QUALITY ASSURANCE PROVISIONS (SEE MIL-STD-35)	
PACKAGING (SEE MIL-STD-35)	
NOTES (SEE MIL-STD-35)	
NOMENCLATURE (SEE MIL-STD-35)	
SUPERSEDED DOCUMENTS (SEE MIL-STD-35)	
PART NUMBER CROSS-REFERENCE (SEE MIL-STD-35)	

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHAR CODE	STANDARD PARAGRAPH
	ADDITIONAL PART MARKING.
6991	(A) 6991.
6992	(B) 6992.
6993	(C) 6993.
6994	(D) 6994.
6995	(E) 6995.

DEFINITION OF HERMETIC SEALING. FOR THE PURPOSE OF THIS DOCUMENT, A HERMETICALLY-SEALED ITEM IS ONE IN WHICH THE ELEMENT IS CONTAINED WITHIN A SEALED ENCLOSURE OF CERAMIC, GLASS OR METAL, OR A COMBINATION THEREOF, WHERE SEALING IS ACCOMPLISHED BY MATERIAL FUSION, WELDING, BRAZING OR SOLDERING.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory).

6.1 Intended Use. This standard part contains codes and paragraphs to be used to specify Transmitters.

6.2 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

CONCLUDING MATERIAL

Review activities:
Army - AR, AT, CR, ER, SC, ME, MR

Preparing activity
Army - MI

(Project EGDS-A471)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

APPENDIX A

ILLUSTRATIONS


10. GENERAL

10.1 Scope. This appendix contains illustrations applicable to this standard which may be used to show configurations or schematics in a MSE. This appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.


20. Applicable documents. This section is not applicable to this appendix.

30. Utilization. When change to configuration in the base document is required enter the illustration number from this appendix with code 1009 on its SRS. If no suitable illustration is shown, send a dimensioned copy of required configuration with input and a illustration number will be assigned. Use code 4950 with illustration number for non-dimensioned input such as a schematic or send with input for illustration number assignment.


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

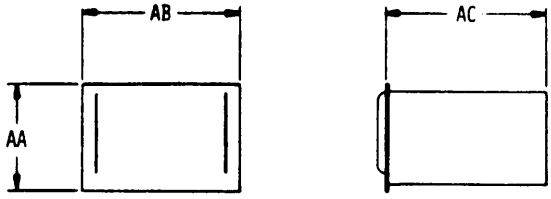

089-02-1

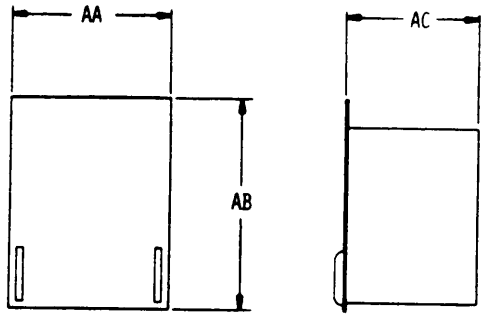


089-03-1

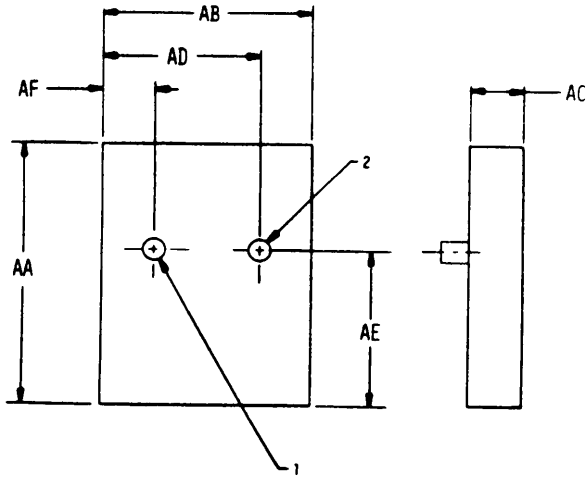


089-04-1


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

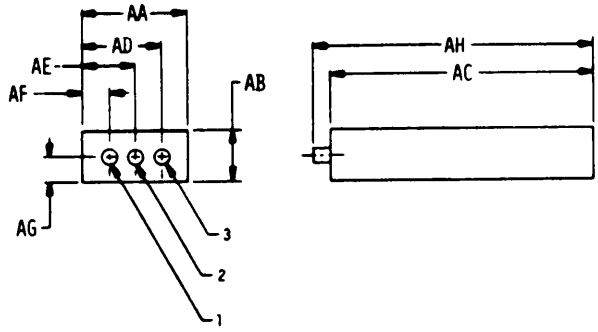

089-05-1

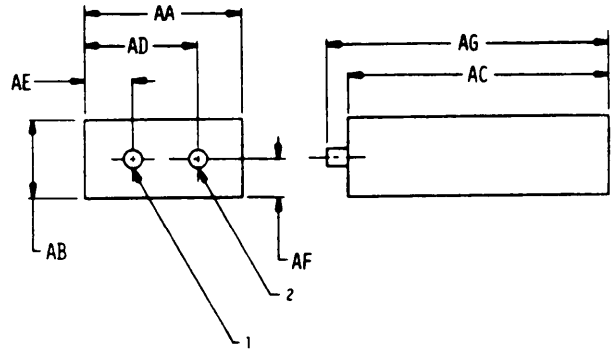


089-05-2

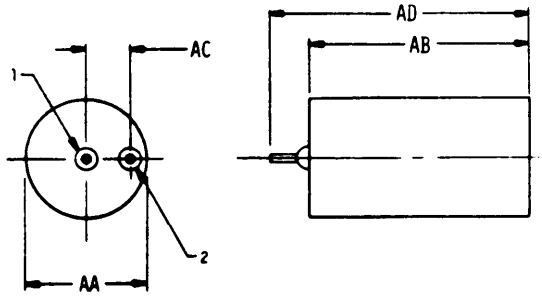


089-06-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

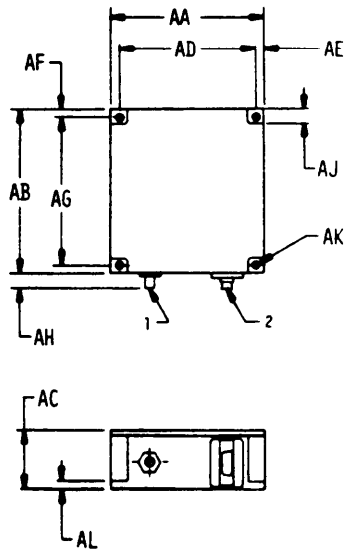


089-07-1

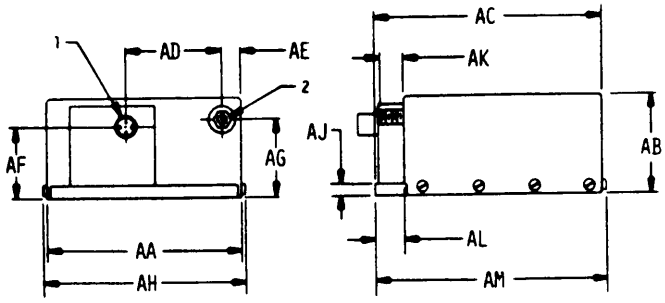


089-07-2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

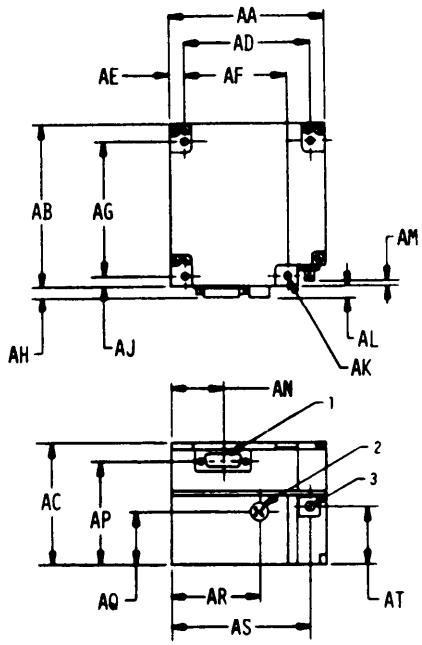

089-08-1

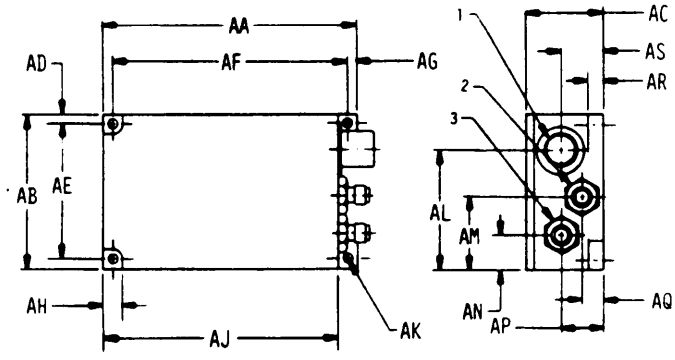

089-09-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

10. GENERAL

10.1 Scope. This appendix cross references each code available in this standard to the page upon which the code appears. This appendix is not a mandatory part of the standard. The information contained herein is intended for guidance only.

20. Applicable documents. This section is not applicable to this appendix.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
0101	12	1453	176	1582	26	1625	36
0102	12	1455	160	1583	26	1626	36
0103	12	1456	160	1584	26	1627	36
0104	12	1459	176	1585	28	1628	36
0105	12	1462	176	1586	14	1629	36
0107	14	1466	168	1590	28	1630	36
0108	14	1467	168	1591	28	1631	36
0700	12	1469	160	1592	28	1632	38
0800	12	1470	170	1593	28	1633	38
1003	12	1473	160	1594	28	1634	38
1004	12	1475	166	1595	28	1635	38
1005	12	1476	166	1596	30	1640	32
1006	12	1477	82	1597	30	1642	32
1008	12	1480	166	1598	30	1643	32
1009	20	1490	166	1599	30	1644	28
1374	170	1533	164	1600	30	1645	28
1391	114	1534	164	1601	30	1646	28
1394	108	1535	170	1602	30	1660	44
1396	108	1536	170	1603	30	1661	44
1397	114	1538	170	1604	30	1662	44
1398	108	1557	48	1605	30	1663	44
1400	108	1558	48	1606	30	1664	44
1404	110	1562	24	1607	30	1665	44
1406	110	1563	24	1608	32	1666	44
1426	174	1564	24	1609	32	1667	44
1427	174	1565	24	1610	32	1668	44
1428	174	1566	24	1611	32	1671	56
1429	110	1567	24	1612	32	1672	56
1430	176	1568	24	1613	34	1673	56
1431	174	1569	24	1614	34	1675	50
1432	110	1570	24	1615	34	1676	52
1435	170	1571	16	1616	34	1677	52
1436	170	1572	16	1617	34	1678	52
1438	174	1573	16	1618	34	1679	52
1439	176	1576	14	1619	34	1680	52
1446	164	1577	26	1620	34	1681	52
1447	164	1578	26	1621	34	1682	52
1448	164	1579	26	1622	34	1683	52
1449	114	1580	26	1623	34	1684	52
1452	174	1581	26	1624	36	1685	52

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR COD E	PAGE NO.	CHAR CODE	PAGE NO.
1686	52	1735	68	1779	76	1826	80
1691	60	1736	68	1781	70	1830	88
1692	60	1737	68	1782	72	1831	88
1693	60	1738	68	1783	76	1832	88
1694	16	1739	68	1784	76	1833	88
1695	60	1740	68	1785	76	1834	80
1696	60	1741	68	1786	76	1837	88
1697	60	1742	68	1787	76	1838	88
1698	60	1743	68	1788	76	1841	98
1699	60	1744	68	1789	84	1842	98
1700	16	1745	68	1790	84	1844	94
1701	62	1746	68	1791	84	1845	94
1702	62	1747	70	1792	84	1846	96
1703	62	1748	70	1793	84	1847	96
1704	62	1749	70	1794	84	1848	96
1705	62	1750	70	1795	84	1849	96
1707	62	1752	64	1796	84	1850	96
1708	62	1753	64	1797	84	1851	96
1709	62	1754	64	1803	80	1852	96
1710	62	1755	64	1804	80	1853	96
1711	62	1756	64	1805	80	1854	96
1714	56	1757	64	1806	16	1855	96
1715	56	1758	64	1807	16	1856	96
1716	56	1759	64	1808	16	1857	96
1717	56	1760	64	1809	80	1858	96
1718	56	1761	64	1810	80	1859	96
1719	58	1762	64	1811	82	1860	96
1720	58	1763	64	1812	82	1861	96
1721	58	1764	64	1813	82	1862	98
1722	58	1765	64	1814	82	1863	98
1723	58	1766	16	1816	76	1864	98
1724	58	1767	64	1817	78	1865	98
1726	70	1768	64	1818	78	1866	98
1727	70	1769	64	1819	78	1867	98
1729	66	1770	66	1820	78	1869	90
1730	66	1771	66	1821	78	1870	90
1731	66	1772	66	1822	78	1871	90
1732	66	1773	66	1823	78	1872	90
1733	68	1777	76	1824	80	1873	92
1734	68	1778	76	1825	80	1874	92

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE No.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO .	CHAR CODE	PAGE NO .
1875	92	1924	106	1971	112	2030	128
1876	92	1925	106	1974	116	2031	128
1877	92	1926	106	1975	122	2032	128
1878	92	1927	108	1976	122	2033	128
1879	92	1928	108	1977	122	2034	128
1880	92	1929	108	1978	122	2035	128
1881	92	1930	108	1979	122	2036	130
1882	92	1931	108	1980	120	2037	130
1883	94	1932	108	1981	120	2038	130
1884	94	1933	108	1982	120	2040	130
1885	94	1935	100	1983	120	2041	130
1886	94	1936	102	1984	120	2042	132
1887	94	1937	102	1985	120	2043	132
1888	94	1938	102	1986	120	2044	132
1893	100	1939	102	1987	120	2045	132
1894	100	1940	102	1988	120	2046	132
1895	100	1941	102	1989	122	2047	132
1896	100	1942	102	1990	122	2048	132
1897	100	1943	102	1991	122	2051	140
1898	100	1944	104	1992	122	2052	140
1899	100	1945	104	1993	122	2053	140
1900	100	1946	104	1994	122	2054	140
1902	98	1947	104	2006	124	2055	140
1903	98	1948	104	2007	124	2056	140
1904	100	1949	104	2008	124	2058	136
1905	100	1950	104	2009	124	2059	136
1906	100	1951	104	2010	124	2060	138
1910	108	1952	104	2011	124	2061	138
1912	106	1953	104	2012	124	2062	138
1913	106	1954	104	2014	124	2063	138
1914	106	1955	104	2015	124	2064	138
1915	106	1956	104	2020	126	2065	138
1916	106	1963	110	2021	126	2066	138
1917	106	1964	110	2022	126	2067	138
1918	106	1965	110	2023	126	2068	138
1919	106	1966	110	2024	126	2069	142
1920	106	1967	110	2025	126	2070	142
1921	106	1968	110	2026	126	2071	142
1922	106	1969	110	2027	126	2072	142
1923	106	1970	112	2028	126	2073	142

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.
2074	142
2075	142
2076	142
2077	142
2080	146
2081	146
2082	146
2083	146
2084	146
2085	146
2086	146
2087	146
2088	146
2091	150
2092	150
2093	150
2094	150
2095	152
2096	152
2097	152
2098	152
2099	152
2100	156
2101	156
2102	156
2103	156
2104	156
2105	156
2106	156
2107	156
2108	156
2111	160
2112	160
2113	160
2114	160
2115	160
2116	160
2117	160
2118	162
2119	162
2120	162
2121	162
2124	166
2125	166
2126	166
2127	166
2128	166
2129	166
2130	166
2131	166
2132	166
2135	170
2136	170
2137	172
2138	172
2139	172
2140	172
2141	172
2142	172
2143	172
2144	172
2145	172
2171	144
2172	144
2173	144
2174	144
2176	140
2177	140
2178	140
2179	140
2185	90
2186	114
2187	136
2188	136
2200	73
2201	73
2202	73
2203	73
2204	73
2205	73
2206	73
2207	73
2208	73
2209	73
2210	73
2211	73
2212	73
2213	73
2214	73
2215	73
2216	73
2217	73
2218	73
2219	73
2220	73
2221	73
2222	73
2223	73
2224	73
2225	73
2226	73
2227	73
2228	73
2229	73
2230	73
2231	73
2232	73
2233	73
2234	73
2235	73
2236	73
2237	73
2238	73
2239	73
2240	73
2241	73
2242	73
2243	73
2244	73
2245	73
2246	73
2247	73
2248	73
2249	73
2250	73
2251	73
2252	73
2253	73
2254	73
2255	73
2256	73
2257	73
2258	73
2259	73
2260	73
2261	73
2262	73
2263	73
2264	73
2265	73
2266	73
2267	73
2268	73
2269	73
2270	75
2271	75
2272	75
2273	75
2274	75
2275	75
2276	75
2277	75
2278	75
2279	75
2280	75
2281	75
2282	75
2283	75
2284	75
2285	75

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2286	75	2327	75	2416	117	2457	117
2287	75	2328	75	2417	117	2458	117
2288	75	2329	75	2418	117	2459	117
2289	75	2330	75	2419	117	2460	117
2290	75	2331	75	2420	117	2461	117
2291	75	2332	75	2421	117	2462	117
2292	75	2333	75	2422	117	2463	117
2293	75	2334	75	2423	117	2464	117
2294	75	2335	75	2424	117	2465	117
2295	75	2336	75	2425	117	2466	117
2296	75	2337	75	2426	117	2467	117
2297	75	2338	75	2427	117	2468	117
2298	75	2339	75	2428	117	2469	117
2299	75	2340	75	2429	117	2470	117
2300	75	2341	75	2430	117	2471	117
2301	75	2342	75	2431	117	2472	117
2302	75	2343	75	2432	117	2473	117
2303	75	2344	75	2433	117	2474	117
2304	75	2345	75	2435	117	2475	117
2305	75	2346	75	2436	117	2476	117
2306	75	2347	75	2437	117	2477	117
2307	75	2348	75	2438	117	2478	117
2308	75	2349	75	2439	117	2479	117
2309	75	2350	16	2440	117	2480	117
2310	75	2400	117	2441	117	2481	117
2311	75	2401	117	2442	117	2482	117
2312	75	2402	117	2443	117	2483	117
2314	75	2403	117	2444	117	2484	117
2315	75	2404	117	2445	117	2485	117
2316	75	2405	117	2446	117	2486	117
2317	75	2406	117	2447	117	2487	117
2318	75	2407	117	2448	117	2488	117
2319	75	2408	117	2449	117	2489	117
2320	75	2409	117	2450	117	2490	119
2321	75	2410	117	2451	117	2491	119
2322	75	2411	117	2452	117	2492	119
2323	75	2412	117	2453	117	2493	119
2324	75	2413	117	2454	117	2494	119
2325	75	2414	117	2455	117	2495	119
2326	75	2415	117	2456	117	2496	119

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2497	119	2537	119	2577	119	2617	119
2498	119	2538	119	2578	119	2618	119
2499	119	2539	119	2579	119	2619	119
2500	119	2540	119	2580	119	2620	119
2501	119	2541	119	2581	119	2621	119
2502	119	2542	119	2582	119	2622	119
2503	119	2543	119	2583	119	2623	119
2504	119	2544	119	2584	119	2624	119
2505	119	2545	119	2585	119	2625	119
2506	119	2546	119	2586	119	2626	119
2507	119	2547	119	2587	119	2627	119
2508	119	2548	119	2588	119	2628	119
2509	119	2549	119	2589	119	2629	119
2510	119	2550	119	2590	119	2630	119
2511	119	2551	119	2591	119	2631	119
2512	119	2552	119	2592	119	2632	119
2513	119	2553	119	2593	119	2633	119
2514	119	2554	119	2594	119	2634	119
2515	119	2555	119	2595	119	2635	119
2516	119	2556	119	2596	119	2636	119
2517	119	2557	119	2597	119	2637	119
2518	119	2558	119	2598	119	2638	119
2519	119	2559	119	2599	119	2639	119
2520	119	2560	119	2600	119	2700	46
2521	119	2561	119	2601	119	2701	46
2522	119	2562	119	2602	119	2702	46
2523	119	2563	119	2603	119	2703	46
2524	119	2564	119	2604	119	2704	46
2525	119	2565	119	2605	119	2705	46
2526	119	2566	119	2606	119	2706	46
2527	119	2567	119	2607	119	2707	46
2528	119	2568	119	2608	119	2708	46
2529	119	2569	119	2609	119	2709	54
2530	119	2570	119	2610	119	2710	54
2531	119	2571	119	2611	119	2711	54
2532	119	2572	119	2612	119	2712	54
2533	119	2573	119	2613	119	2713	54
2534	119	2574	119	2614	119	2714	54
2535	119	2575	119	2615	119	2715	54
2536	119	2576	119	2616	119	2716	54

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
2717	54	2757	152	2796	174	4811	90
2718	84	2758	152	2797	174	4812	90
2719	84	2759	152	2798	174	4813	82
2720	86	276	152	2800	64	4819	88
2721	86	2760	152	2803	56	4820	88
2722	86	2761	154	2810	90	4822	88
2723	86	2762	154	2815	98	4825	88
2724	86	2763	158	2820	102	4853	86
2725	86	2764	158	2825	124	4863	48
2726	86	2765	158	2830	136	4864	48
2727	112	2766	158	4678	176	4865	48
2728	112	2767	158	4707	164	4868	48
2729	112	2768	158	4708	164	4878	128
2730	112	2769	158	4709	164	4890	86
2731	112	2770	158	4713	158	4892	48
2732	112	2771	158	4714	158	4893	50
2733	112	2772	162	4715	160	4950	22
2734	112	2773	162	4719	160	4963	128
2735	112	2774	162	4722	156	4967	126
2736	142	2775	162	4723	156	4968	126
2737	142	2776	162	4726	156	4972	128
2738	142	2777	162	4729	170	4975	176
2739.	144	2778	162	4730	170	4976	176
2740	144	2779	164	4731	170	4977	176
2741	144	2780	164	4765	130	4979	170
2742	144	2781	168	4766	130	4980	114
2743	144	2782	168	4770	130	4981	114
2744	144	2783	168	4771	130	4983	114
2745	148	2784	168	4772	130	4984	114
2746	148	2785	168	4773	130	4985	114
2747	148	2786	168	4782	128	4986	114
2748	148	2787	168	4788	86	5048	41
2749	148	2788	168	4791	82	5052	41
2750	148	2789	168	4795	82	5053	41
2751	148	2790	172	4798	82	5054	41
2752	148	2791	172	4799	82	5055	41
2753	148	2792	172	4803	82	5056	41
2754	152	2793	174	4805	82	5057	41
2755	152	2794	174	4809	90	5060	18
2756	152	2795	174	4810	90	5061	18

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

CHARACTERISTIC CODE INDEX

CHAR CODE	PAGE NO.	CHAR COD E	PAGE NO.	CHAR CODE	PAGE NO.	CHAR CODE	PAGE NO.
5062	18	6327	134	7301	41		
5063	18	6338	134	7302	41		
5068	18	6339	134	7305	134		
5069	18	6340	134	7306	134		
5070	18	6341	134	7307	136		
5071	18	6342	134	7308	136		
6200	164	6343	134	7309	136		
6204	136	6344	134	7311	132		
6206	86	6345	134	7312	132		
6207	86	6346	134	7313	132		
6210	50	6347	134	7315	130		
6217	148	6348	136	7316	130		
6218	148	6349	136	7317	132		
6219	150	6369	12	7318	132		
6220	150	6372	178	7345	42		
6221	150	6870	178	7552	20		
6222	150	6873	12	7573	20		
6224	150	6874	14	7576	20		
6225	150	6941	16	7577	20		
6228	146	6942	16	7580	22		
6229	146	6991	180	7629	178		
6231	154	6992	180	7630	178		
6232	154	6993	180				
6234	154	6994	180				
6235	154	6995	180				
6236	154	7001	178				
6237	154	7002	178				
6238	154	7003	178				
6250	48	7004	178				
6251	48	7005	178				
6263	50	7021	42				
6264	50	7022	42				
6265	50	7023	42				
6272	42	7024	42				
6273	42	7025	38				
6277	42	7026	38				
6315	154	7027	40				
6316	154	7028	40				
6318	150	7029	40				
6319	150	7030	40				

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

THIS PAGE INTENTIONALLY LEFT BLANK

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER	2. DOCUMENT DATE (YYMMDD)
	MIL-STD-35-108A(MI)	930521

3. DOCUMENT TITLE
AUTOMATED ENGINEERING DOCUMENT PREPARATION SYSTEMS - TRANSMITTERS

4. NATURE OF CHANGE *(Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)*

5. REASON FOR RECOMMENDATION

6. SUBMITTER

a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME	b. TELEPHONE (Include Area Code)	
COMMANDER US ARMY MISSILE COMMAND	(1) Commercial 205-876-6980	(2) AUTOVON 746-6980
c. ADDRESS (Include Zip Code) ATTN: AMSMI-RD-SE-TD-ST REDSTONE ARSENAL, AL 35898-5270	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466 Telephone (703) 756-2340 AUTOVON 289-2340	

DD FORM 1426 89 OCT

Source: https://assist.dla.mil -- Downloaded: 202610-23T21:02Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T21:02Z
Check the source to verify that this is the current version before use.