MILITARY SPECIFICATION

SPLICES, CONDUCTOR, STYLE LP05

This specification has been approved by the Department of Defense and is mandatory for use by the Departments of the Army, the Navy, and the Air Force.

1. SCOPE

1.1 This specification covers the detail requirements for style LP05 conductor splices.

2. APPLICABLE DOCUMENTS

2.1 The following document, of the issue in effect on date of invitation for bids, forms a part of this specification to the extent specified herein.

SPECIFICATION

MILITARY

MIL-T-55156 — Terminals, Lug; Splices, Conductor; Screw Type, General Specification for.

(Copies of specifications required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 **Requirements.** Requirements shall be in accordance with Specification MIL-T-55156, and as specified herein.


3.2 **Design and construction.** Conductor splices shall be of the design, construction, and physical dimensions specified on figure 1.

3.2.1 *Conductor accommodations.* Conductor accommodations shall be designed for a 90° attitude, with the tap conductor terminating in and the run conductor passing through the conductor splice.

3.3 **Voltage drop.** The voltage drop shall be as specified on figure 1, as applicable.

3.4 **Tensile strength.** The tensile strength shall be as specified on figure 1, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

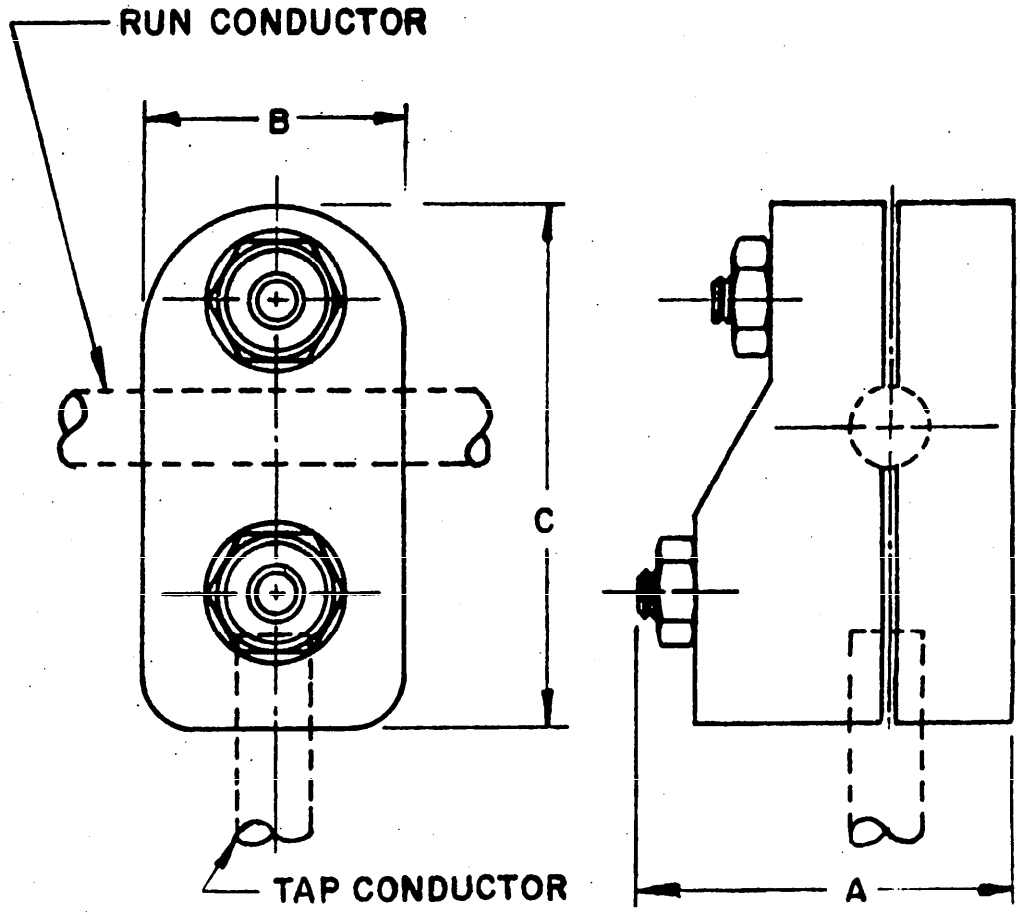

1. All dimensions in inches.
2. Drawing depicts only general design characteristics and is not intended to limit specific manufacturing processes.

FIGURE 1. *Style LP05 conductor splices.*

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

Item No.	Terminal size		Dimensions			Rated current	Voltage drop	Tensile strength	
	Run conductor	Tap conductor	A (max)	B (max)	C (max)			Run conductor	Tap conductor
						Amperes, max	*Volt, max*	*Pounds, min*	*Pounds, min*
1	14	14	1	1 0/16	1 1/8	32	0.025	85	85
2	12–10	12–10	1	1 1/16	1 1/8	66	0.025	115	115
3	9	9	1	1 1/16	1 1/8	92	0.025	145	145
4	8	8	1 1/8	1 3/16	2 5/8	117	0.025	180	180
5	6	6	1 1/8	1 5/16	2 5/8	142	0.025	220	220
6	5	5	1 1/8	1 3/16	2 5/8	165	0.025	260	260
7	4	4	1 1/8	1 3/8	2 5/8	189	0.025	325	325
8	3	3	1 1/8	1 7/16	2 5/8	215	0.025	390	390
9	2	2	1 1/8	1 9/16	2 5/8	253	0.025	450	450
10	1	2	1 1/8	1 3/4	3 1/8	253	0.025	490	450
11	1	1	1 1/8	1 3/4	3 1/8	300	0.023	490	490
12	0	2	1 1/8	1 3/4	3 1/8	253	0.025	530	450
13	0	1	1 1/8	1 3/4	3 1/8	300	0.023	530	490
14	0	0	1 1/8	1 3/4	3 1/8	345	0.023	530	530
15	00	2	1 1/8	1 3/4	3 1/8	253	0.025	570	450
16	00	1	1 1/8	1 3/4	3 1/8	300	0.023	570	490
17	00	0	1 1/8	1 3/4	3 1/8	345	0.023	570	530
18	00	00	1 1/8	1 3/4	3 1/8	400	0.023	570	570
19	000	2	1 1/8	1 3/4	3 1/8	253	0.025	650	450
20	000	1	1 1/8	1 3/4	3 1/8	300	0.023	650	490
21	000	0	1 1/8	1 3/4	3 1/8	345	0.023	650	530
22	000	00	1 1/8	1 3/4	3 1/8	400	0.023	650	570
23	000	000	1 1/8	1 3/4	3 1/8	465	0.023	650	650
24	0000	2	1 1/8	2	3 1/2	253	0.025	750	450
25	0000	1	1 1/8	2	3 1/2	300	0.023	750	490
26	0000	0	1 1/8	2	3 1/2	345	0.023	750	530
27	0000	00	1 1/8	2	3 1/2	400	0.023	750	570
28	0000	000	1 1/8	2	3 1/2	465	0.023	750	650
29	0000	0000	1 1/8	2	3 1/2	540	0.023	750	750
30	300 MCM	2	1 1/8	2	3 1/2	253	0.025	875	450
31	300 MCM	1	1 1/8	2	3 1/2	300	0.023	875	490
32	300 MCM	0	1 1/8	2	3 1/2	345	0.023	875	530
33	300 MCM	00	1 1/8	2	3 1/2	400	0.023	875	570
34	300 MCM	000	1 1/8	2	3 1/2	465	0.023	875	650
35	300 MCM	0000	1 1/8	2	3 1/2	540	0.023	875	750
36	300 MCM	300 MCM	1 1/8	2	3 1/2	595	0.023	875	875
37	400 MCM	2	2 3/8	2 1/16	4	253	0.025	1,200	450
38	400 MCM	1	2 3/8	2 1/16	4	300	0.023	1,200	490
39	400 MCM	0	2 3/8	2 3/16	4	345	0.023	1,200	530
40	400 MCM	00	2 3/8	2 1/16	4	400	0.023	1,200	570
41	400 MCM	000	2 3/8	2 3/16	4	465	0.023	1,200	650
42	400 MCM	0000	2 3/8	2 1/16	4	540	0.023	1,200	750
43	400 MCM	300 MCM	2 3/8	2 1/16	4	595	0.023	1,200	875
44	400 MCM	350 MCM	2 3/8	2 1/16	4	595	0.023	1,200	875
45	400 MCM	400 MCM	2 3/8	2 3/16	4	740	0.023	1,200	1,200
46	500 MCM	2	2 3/8	2 1/16	4	253	0.025	1,475	450
47	500 MCM	1	2 3/8	2 1/16	4	300	0.023	1,475	490

FIGURE 1. — Continued.

Source: https://assist.dla.mil -- Downloaded: 2026l0-22T22:31Z
Check the source to verify that this is the currentversion before use.

Item No.	Terminal size		Dimensions			Rated current	Voltage drop	Tensile strength	
	Run conductor	Tap conductor	A (max)	B (max)	C (max)			Run conductor	Tap conductor
						Amperes, max	*Volt, max*	*Pounds, min*	*Pounds, min*
48	500 MCM	0	2⅜	2 5/16	4	345	0.023	1,475	530
49	500 MCM	00	2⅜	2 5/16	4	400	0.023	1,475	570
50	500 MCM	000	2⅜	2 5/16	4	465	0.023	1,475	650
51	500 MCM	0000	2⅜	2 5/16	4	540	0.023	1,475	750
52	500 MCM	300 MCM	2⅜	2 5/16	4	595	0.023	1,475	875
53	500 MCM	350 MCM	2⅜	2 5/16	4	595	0.023	1,475	875
54	500 MCM	400 MCM	2⅜	2 5/16	4	740	0.023	1,475	1,200
55	500 MCM	500 MCM	2⅜	2 5/16	4	740	0.023	1,475	1,200
56	600 MCM	2	2⅜	2 5/16	4	253	0.025	1,475	450
57	600 MCM	1	2⅜	2 5/16	4	300	0.023	1,475	490
58	600 MCM	0	2⅜	2 5/16	4	345	0.023	1,475	530
59	600 MCM	00	2⅜	2 5/16	4	400	0.023	1,475	570
60	600 MCM	000	2⅜	2 5/16	4	465	0.023	1,475	650
61	600 MCM	0000	2⅜	2 5/16	4	540	0.023	1,475	750
62	600 MCM	300 MCM	2⅜	2 5/16	4	595	0.023	1,475	875
63	600 MCM	350 MCM	2⅜	2 5/16	4	595	0.023	1,475	875
64	600 MCM	400 MCM	2⅜	2 5/16	4	740	0.023	1,475	1,200
65	600 MCM	500 MCM	2⅜	2 5/16	4	740	0.023	1,475	1,200
66	600 MCM	600 MCM	2⅜	2 5/16	4	860	0.023	1,475	1,475
67	650 MCM	650 MCM	2⅜	2⅝	4½	1,000	0.023	1,850	1,850
68	700 MCM	2	2⅝	3	5	253	0.023	1,850	450
69	700 MCM	1	2⅝	3	5	300	0.023	1,850	490
70	700 MCM	0	2⅝	3	5	345	0.023	1,850	530
71	700 MCM	00	2⅝	3	5	400	0.023	1,850	570
72	700 MCM	000	2⅝	3	5	465	0.023	1,850	650
73	700 MCM	0000	2⅝	3	5	540	0.023	1,850	750
74	700 MCM	300 MCM	2⅝	3	5	595	0.023	1,850	875
75	700 MCM	350 MCM	2⅝	3	5	595	0.023	1,850	875
76	700 MCM	400 MCM	2⅝	3	5	740	0.023	1,850	1,200
77	700 MCM	500 MCM	2⅝	3	5	740	0.023	1,850	1,200
78	700 MCM	600 MCM	2⅝	3	5	860	0.023	1,850	1,475
79	700 MCM	700 MCM	2⅝	3	5	1,000	0.023	1,850	1,850
80	750 MCM	2	2⅝	3	5	253	0.025	1,850	450
81	750 MCM	1	2⅝	3	5	300	0.023	1,850	490
82	750 MCM	0	2⅝	3	5	345	0.023	1,850	530
83	750 MCM	00	2⅝	3	5	400	0.023	1,850	570
84	750 MCM	000	2⅝	3	5	465	0.023	1,850	650
85	750 MCM	0000	2⅝	3	5	540	0.023	1,850	750
86	750 MCM	300 MCM	2⅝	3	5	595	0.023	1,850	875
87	750 MCM	350 MCM	2⅝	3	5	595	0.023	1,850	875
88	750 MCM	400 MCM	2⅝	3	5	740	0.023	1,850	1,200
89	750 MCM	500 MCM	2⅝	3	5	740	0.023	1,850	1,200
90	750 MCM	600 MCM	2⅝	3	5	860	0.023	1,850	1,475
91	750 MCM	700 MCM	2⅝	3	5	1,000	0.023	1,850	1,850
92	750 MCM	750 MCM	2⅝	3	5	1,000	0.023	1,850	1,850
93	800 MCM	2	2⅝	3	5	253	0.025	1,850	450

FIGURE 1. — Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.

Item No.	Terminal size		Dimensions			Rated current	Voltage drop	Tensile strength	
	Run conductor	Tap conductor	A (max)	B (max)	C (max)			Run conductor	Tap conductor
						Amperes, max	*Volt, max*	*Pounds, min*	*Pounds, min*
94	800 MCM	1	2⅝	3	5	300	0.023	1,850	490
95	800 MCM	0	2⅝	3	5	345	0.023	1,850	530
96	800 MCM	00	2⅝	3	5	400	0.023	1,850	570
97	800 MCM	000	2⅝	3	5	465	0.023	1,850	650
98	800 MCM	0000	2⅝	3	5	540	0.023	1,850	750
99	800 MCM	300 MCM	2⅝	3	5	595	0.023	1,850	875
100	800 MCM	350 MCM	2⅝	3	5	595	0.023	1,850	875
101	800 MCM	400 MCM	2⅝	3	5	740	0.023	1,850	1,200
102	800 MCM	500 MCM	2⅝	3	5	740	0.023	1,850	1,200
103	800 MCM	600 MCM	2⅝	3	5	860	0.023	1,850	1,475
104	800 MCM	700 MCM	2⅝	3	5	1,000	0.023	1,850	1,850
105	800 MCM	750 MCM	2⅝	3	5	1,000	0.023	1,850	1,850
106	800 MCM	800 MCM	2⅝	3	5	1,000	0.023	1,850	1,850
107	900 MCM	2	3	3 3/16	5⅝	253	0.025	2,160	450
108	900 MCM	1	3	3 3/16	5⅝	300	0.023	2,160	490
109	900 MCM	0	3	3 3/16	5⅝	345	0.023	2,160	530
110	900 MCM	00	3	3 3/16	5⅝	400	0.023	2,160	570
111	900 MCM	000	3	3 3/16	5⅝	465	0.023	2,160	650
112	900 MCM	0000	3	3 3/16	5⅝	540	0.023	2,160	750
113	900 MCM	300 MCM	3	3 3/16	5⅝	595	0.023	2,160	875
114	900 MCM	350 MCM	3	3 3/16	5⅝	595	0.023	2,160	875
115	900 MCM	400 MCM	3	3 3/16	5⅝	740	0.023	2,160	1,200
116	900 MCM	500 MCM	3	3 3/16	5⅝	740	0.023	2,160	1,200
117	900 MCM	600 MCM	3	3 3/16	5⅝	860	0.023	2,160	1,475
118	900 MCM	700 MCM	3	3 3/16	5⅝	1,000	0.023	2,160	1,850
119	900 MCM	750 MCM	3	3 3/16	5⅝	1,000	0.023	2,160	1,850
120	900 MCM	800 MCM	3	3 3/16	5⅝	1,000	0.023	2,160	1,850
121	900 MCM	900 MCM	3	3 3/16	5⅝	1,190	0.023	2,160	2,160
122	1,000 MCM	2	3	3 3/16	5⅝	253	0.025	2,160	450
123	1,000 MCM	1	3	3 3/16	5⅝	300	0.023	2,160	490
124	1,000 MCM	0	3	3 3/16	5⅝	345	0.023	2,160	530
125	1,000 MCM	00	3	3 3/16	5⅝	400	0.023	2,160	570
126	1,000 MCM	000	3	3 3/16	5⅝	465	0.023	2,160	650
127	1,000 MCM	0000	3	3 3/16	5⅝	540	0.023	2,160	750
128	1,000 MCM	300 MCM	3	3 3/16	5⅝	595	0.023	2,160	875
129	1,000 MCM	350 MCM	3	3 3/16	5⅝	595	0.023	2,160	875
130	1,000 MCM	400 MCM	3	3 3/16	5⅝	740	0.023	2,160	1,200
131	1,000 MCM	500 MCM	3	3 3/16	5⅝	740	0.023	2,160	1,200
132	1,000 MCM	600 MCM	3	3 3/16	5⅝	860	0.023	2,160	1,475
133	1,000 MCM	700 MCM	3	3 3/16	5⅝	1,000	0.023	2,160	1,850
134	1,000 MCM	750 MCM	3	3 3/16	5⅝	1,000	0.023	2,160	1,850
135	1,000 MCM	800 MCM	3	3 3/16	5⅝	1,000	0.023	2,160	1,850
136	1,000 MCM	900 MCM	3	3 3/16	5⅝	1,190	0.023	2,160	2,160
137	1,000 MCM	1,000 MCM	3	3 3/16	5⅝	1,190	0.023	2,160	2,160
138	1,250 MCM	0	3¼	3⅞	6 3/16	345	0.023	2,400	530
139	1,250 MCM	00	3¼	3⅞	6 3/16	400	0.023	2,400	570

FIGURE 1. — Continued.

Source: https://assist.dla.mil -- Downloaded: 202610-22T22:31Z
Check the source to verify that this is the current version before use.

Item No.	Terminal size		Dimensions			Rated current	Voltage drop	Tensile strength	
	Run conductor	Tap conductor	A (max)	B (max)	C (max)			Run conductor	Tap conductor
						Amperes, max	*Volt, max*	*Pounds, min*	*Pounds, min*
140	1,250 MCM	000	3¼	3⅞	6 3/16	465	0.023	2,400	650
141	1,250 MCM	0000	3¼	3⅞	6 3/16	540	0.023	2,400	750
142	1,250 MCM	300 MCM	3¼	3⅞	6 3/16	595	0.023	2,400	875
143	1,250 MCM	350 MCM	3¼	3⅞	6 3/16	595	0.023	2,400	875
144	1,250 MCM	400 MCM	3¼	3⅞	6 3/16	740	0.023	2,400	1,200
145	1,250 MCM	500 MCM	3¼	3⅞	6 3/16	740	0.023	2,400	1,200
146	1,250 MCM	600 MCM	3¼	3⅞	6 3/16	860	0.023	2,400	1,475
147	1,250 MCM	700 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,400	1,850
148	1,250 MCM	750 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,400	1,850
149	1,250 MCM	800 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,400	1,850
150	1,250 MCM	900 MCM	3¼	3⅞	6 3/16	1,190	0.023	2,400	2,160
151	1,250 MCM	1,000 MCM	3¼	3⅞	6 3/16	1,190	0.023	2,400	2,160
152	1,250 MCM	1,250 MCM	3¼	3⅞	6 3/16	1,375	0.023	2,400	2,400
153	1,500 MCM	0	3¼	3⅞	6 3/16	345	0.023	2,400	530
154	1,500 MCM	00	3¼	3⅞	6 3/16	400	0.023	2,400	570
155	1,500 MCM	000	3¼	3⅞	6 3/16	465	0.023	2,400	650
156	1,500 MCM	0000	3¼	3⅞	6 3/16	540	0.023	2,400	750
157	1,500 MCM	300 MCM	3¼	3⅞	6 3/16	595	0.023	2,400	875
158	1,500 MCM	350 MCM	3¼	3⅞	6 3/16	595	0.023	2,400	875
159	1,500 MCM	400 MCM	3¼	3⅞	6 3/16	740	0.023	2,400	1,200
160	1,500 MCM	500 MCM	3¼	3⅞	6 3/16	740	0.023	2,400	1,200
161	1,500 MCM	600 MCM	3¼	3⅞	6 3/16	860	0.023	2,400	1,475
162	1,500 MCM	700 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,400	1,850
163	1,500 MCM	750 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,400	1,850
164	1,500 MCM	800 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,400	1,850
165	1,500 MCM	900 MCM	3¼	3⅞	6 3/16	1,190	0.023	2,400	2,160
166	1,500 MCM	1,000 MCM	3¼	3⅞	6 3/16	1,190	0.023	2,400	2,160
167	1,500 MCM	1,250 MCM	3¼	3⅞	6 3/16	1,375	0.023	2,400	2,400
168	1,500 MCM	1,500 MCM	3¼	3⅞	6 3/16	1,375	0.023	2,400	2,400
169	1,600 MCM	1,600 MCM	3¼	3⅞	6 3/16	1,800	0.023	2,800	2,800
170	2,000 MCM	0	3¼	3⅞	6 3/16	345	0.023	2,800	530
171	2,000 MCM	00	3¼	3⅞	6 3/16	400	0.023	2,800	570
172	2,000 MCM	000	3¼	3⅞	6 3/16	465	0.023	2,800	650
173	2,000 MCM	0000	3¼	3⅞	6 3/16	540	0.023	2,800	750
174	2,000 MCM	300 MCM	3¼	3⅞	6 3/16	595	0.023	2,800	875
175	2,000 MCM	350 MCM	3¼	3⅞	6 3/16	595	0.023	2,800	875
176	2,000 MCM	400 MCM	3¼	3⅞	6 3/16	740	0.023	2,800	1,200
177	2,000 MCM	500 MCM	3¼	3⅞	6 3/16	740	0.023	2,800	1,200
178	2,000 MCM	600 MCM	3¼	3⅞	6 3/16	860	0.023	2,800	1,475
179	2,000 MCM	700 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,800	1,850
180	2,000 MCM	750 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,800	1,850
181	2,000 MCM	800 MCM	3¼	3⅞	6 3/16	1,000	0.023	2,800	1,850
182	2,000 MCM	900 MCM	3¼	3⅞	6 3/16	1,190	0.023	2,800	2,160
183	2,000 MCM	1,000 MCM	3¼	3⅞	6 3/16	1,190	0.023	2,800	2,160
184	2,000 MCM	1,250 MCM	3¼	3⅞	6 3/16	1,375	0.023	2,800	2,400
185	2,000 MCM	1,500 MCM	3¼	3⅞	6 3/16	1,375	0.023	2,800	2,400
186	2,000 MCM	2,000 MCM	3¼	3⅞	6 3/16	1,800	.023	2,800	2,800

FIGURE 1 — Continued.

Source: https://assist.dla.mil -- Downloaded: 20261O-22T22:31Z
Check the source to verify that this is the currentversion before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 Sampling and inspection shall be in accordance with Specification MIL-T-55156.

5. PREPARATION FOR DELIVERY

5.1 Preparation for delivery shall be in accordance with Specification MIL-T-55156.

6. NOTES

6.1 The notes specified in Specification MIL-T-55156 are applicable to this specification.

Notice. When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

Custodians:
Army—SigC
Navy—Ships
Air Force

Preparing activity:
Army—SigC

Source: https://assist.dla.mil -- Downloaded: 2026-10-22T22:31Z
Check the source to verify that this is the current version before use.