INCH-POUND
MS26580C
15 July 2021
SUPERSEDING
MS26580B
23 October 2006

DETAIL SPECIFICATION SHEET

COVER, AIRPORT MARKER LIGHT BASE, BLANK

This specification is approved for use by all
Departments and Agencies of the Department of Defense.

Comments, suggestions, or questions on this document should be sent to: STDZNMGT@dla.mil or Defense Logistics Agency Aviation VEB, 8000 Jefferson Davis Highway, Richmond, VA 23297-5616. Since contact information can change, you may want to verify the currency of this address information using the ASSIST database at https://assist.dla.mil/.

AMSC N/A FSC 6210

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

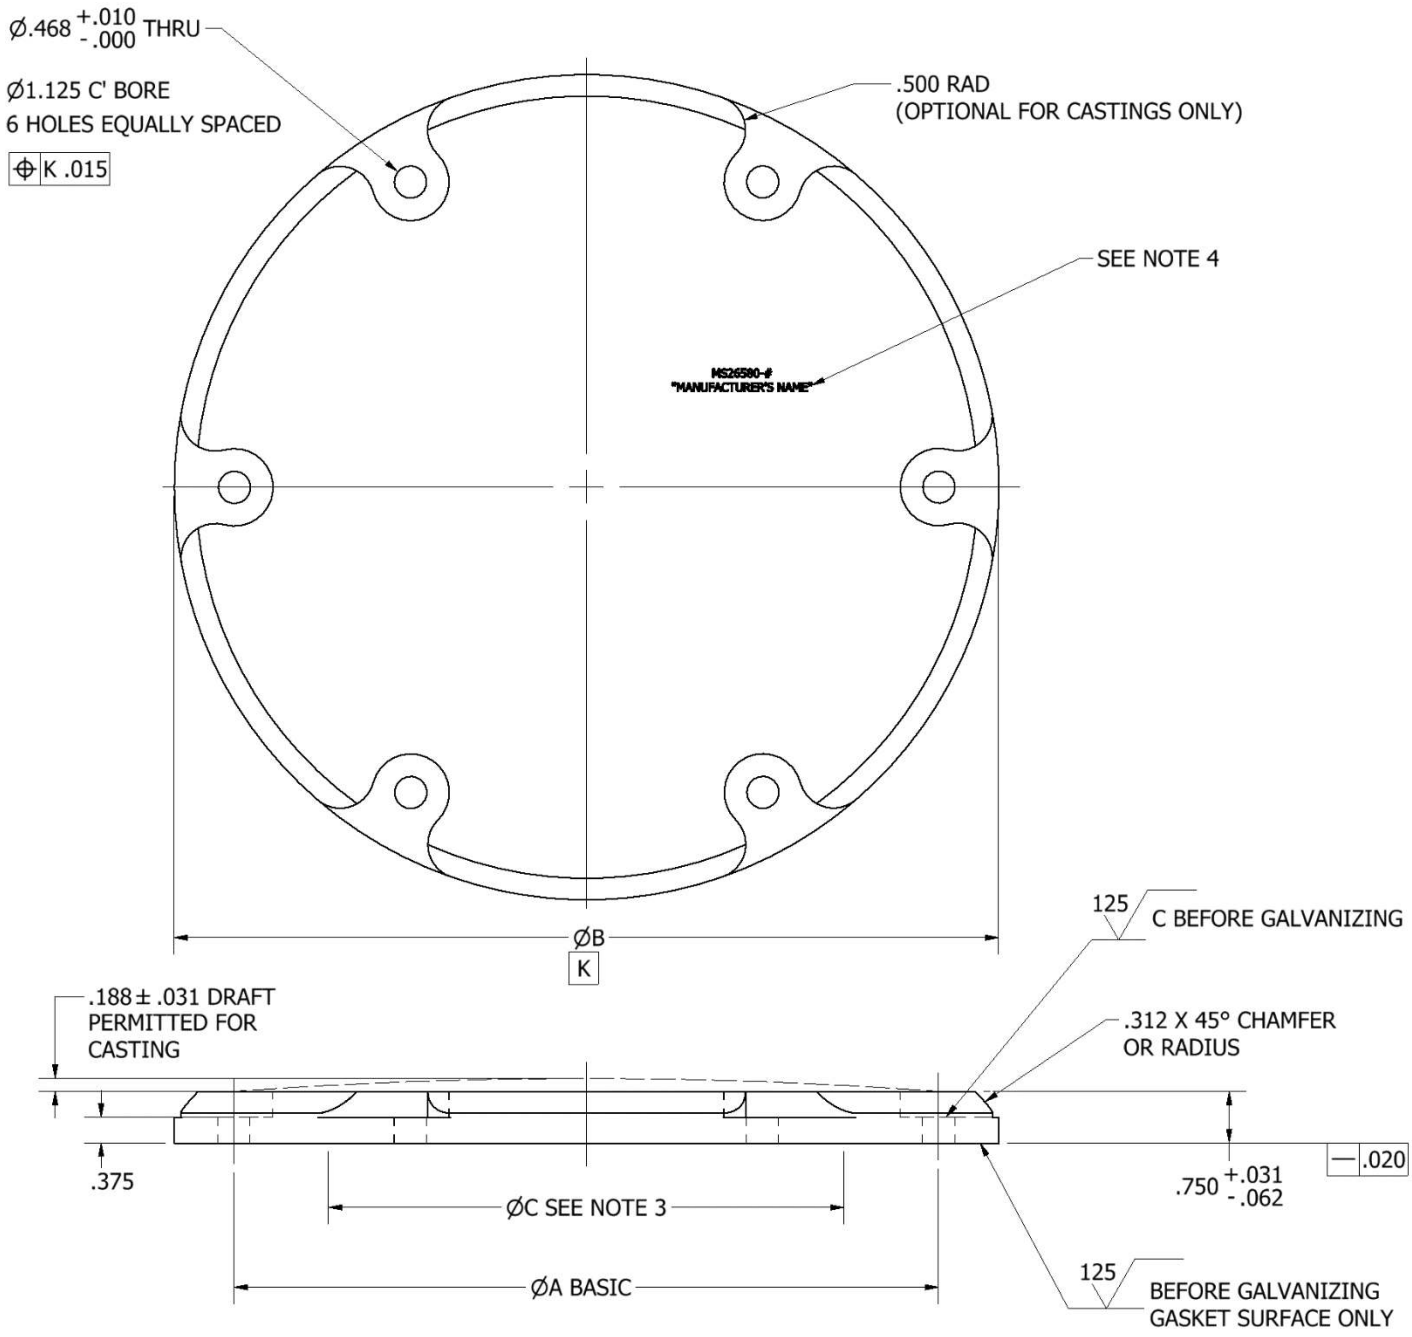


FIGURE 1. Design and Configuration

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

3D Model (MS26580-1 with .500 RAD) for reference only.

FIGURE 1. Design and Construction - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

3D Model (MS26580-1 without .500 RAD) for reference only.

FIGURE 1. Design and Construction - Continued

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.

TABLE I. Dash Number

Dash Number	ØA	ØB		ØC	
-1	10.250	12.000	±0.125	7.500	+ 0.000
-2	14.250	17.375		11.750	- 0.250

NOTES:

1. Material: Steel, plate, or cast, must withstand a compression load of 100,000 lbs when tested per procurement speciation (MIL-DTL-8954).
2. Finish: Galvanized see procurement specification.
3. Surface roughness as fabricated unless otherwise specified. Remove all burrs and sharp edges.
4. Minimum marking to be permanently marked on top of assembly: MS Part No. and Manufacturer's Name, Abbreviation or Trademark.
5. This base plate is supplied with 6 .375-16 UNC-2A bolts, 6 MS21205 washers, and 1 MS26577 gasket.
6. Dimensions in inches. Unless otherwise in specified, Tolerances: Decimals ± 0.010, Angles ±0° ±5°

Referenced documents. In addition to the procurement specification, MIL-DTL-8954, this document references the following:
MS21205
MS26577

Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extent of the changes.

Custodian:
Navy - AS
DLA - GS

Preparing Activity:
DLA – GS2

(Project 6210-2021-002)

Reviewer Activity:
Navy - YD

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST database at https://assist.dla.mil/.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:13Z
Check the source to verify that this is the current version before use.