MIL-F-8975/4A
29 September 1982
Superseding
MIL-F-8975/4
15 May 1978

MILITARY SPECIFICATION SHEET


FASTENERS, BLIND, HIGH STRENGTH, CORROSION RESISTANT AND HEAT RESISTANT STEEL, PROTRUDING HEAD, TYPE II, CLASS 1

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The complete requirements for acquiring the fasteners described herein shall consist of this document and the latest issue of specification MIL-F-8975.

Design and usage limitations - These blind fasteners shall be used in accordance with the limitations of MIL-F-8975/1.

Tooling installation and removal - See MIL-F-8975 Appendix B.

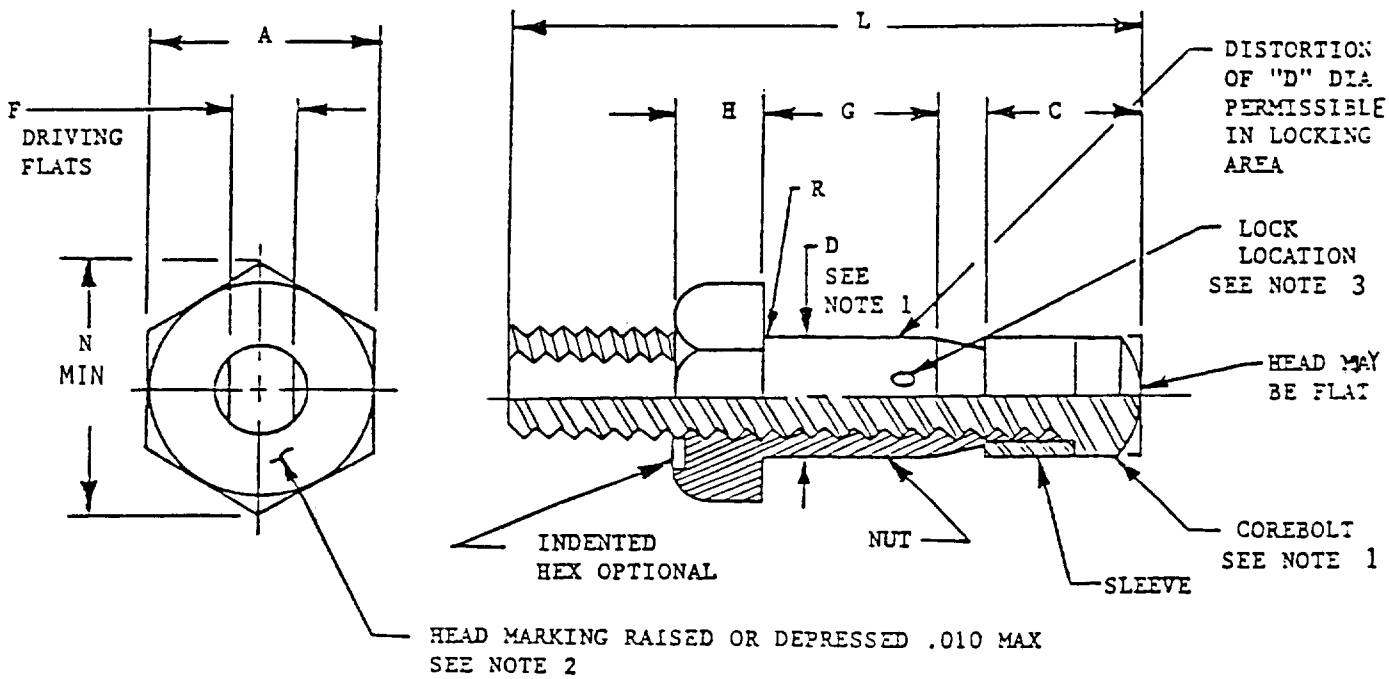

NOTES:
1. Outside diameter of head of corebolt and outside diameter of sleeve shall be not greater than maximum "D" diameter.
2. Head marking shall consist of the manufacturer's part number and identification symbol.
3. Concentricity of nut head surface to "D" diameter shall be within .005 tir. except overlocking feature.

FIGURE 1. Blind fastener.

FSC 5320

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

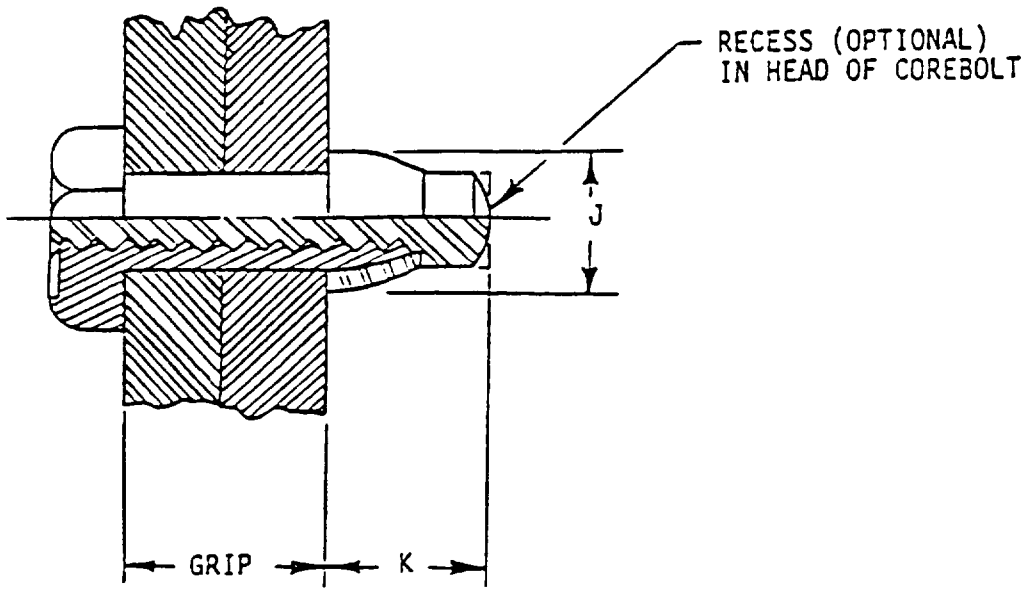


FIGURE 2. Typical installation.

1. REQUIREMENTS

1.1 Materials.

1.1.1 Nut. Nut material shall be A-286 corrosion resistant steel in accordance with AMS 5735 or AMS 5737.

1.1.2 Corebolt. Corebolt material shall be A-286 corrosion resistant steel in accordance with AMS 5735, AMS 5737, or AMS 5731; or Inconel 718 in accordance with AMS 5562.

1.1.3 Sleeve. Sleeve material shall be A-286 corrosion resistant steel in accordance with AMS 5735, AMS 5737 or AMS 5731; or Inconel X-750 in accordance with AMS 5667 or AMS 5582.

1.2 Heat treatment.

1.2.1 Nut and corebolt. The nut and corebolt shall be heat treated to not less than Rockwell C30.

1.3 Protective treatment. The fastener shall be passivated in accordance with QQ-P-35.

1.4 Lubricants. Lubricants may be applied to any or all components if required for performance. Lubricants shall be cetyl alcohol, lauric acid, WWM carbo-wax, or dry film lubricant in accordance with MIL-L-8937.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

TABLE I. Sizes and dimensions.

BODY DIA	NOM DIA	A	C MAX	D DIA	F DRIVING FLATS	H MAX	J DIA MAX	K MAX (A)	N MIN	R RAD (A)	DOUBLE SHEAR LBS MIN (A)	TENSILE STRENGTH LBS MIN
-05	.1635	.250 .244	.287	.1645 .1625	.086 .081	.096	.244	.272	.272	.020 .010	3,960	1,150
-06	.1980	.312 .305	.326	.1990 .1970	.104 .099	.113	.300	.315	.340	.025 .015	5,850	1,690
-08	.2590	.375 .367	.360	.2600 .2580	.135 .130	.135	.384	.356	.409	.025 .015	10,000	2,900
-10	.3105	.437 .429	.440	.3115 .3095	.152 .147	.160	.427	.420	.479	.030 .015	14,400	4,170
-12	.3735	.500 .491	.539	.3745 .3725	.185 .180	.190	.516	.495	.548	.030 .015	20,760	5,970

(A) denotes changes.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

TABLE II. Body diameters and grip lengths.

GRIP DASH NO.	GRIP LENGTH		G +.020 -.000	L (REF)				
	min	max		-05	-06	-08	-10	-12
-01	.031	.093	.093	.733	.874			
-02	.054	.156	.156	.795	.936	1.006	1.158	
-03	.157	.219	.219	.859	.999	1.069	1.221	1.304
-04	.220	.281	.281	.920	1.061	1.131	1.283	1.367
-05	.282	.344	.344	.983	1.124	1.194	1.346	1.429
-06	.345	.406	.406	1.045	1.186	1.256	1.408	1.492
-07	.407	.489	.489	1.108	1.249	1.319	1.471	1.554
-08	.470	.531	.531	1.170	1.311	1.381	1.533	1.617
-09	.532	.594	.594	1.233	1.374	1.444	1.596	1.679
-10	.595	.656	.656	1.295	1.436	1.506	1.658	1.742
-11	.657	.719	.719	1.358	1.499	1.569	1.721	1.804
-12	.720	.781	.781	1.420	1.561	1.631	1.783	1.867
-13	.782	.844	.844	1.483	1.624	1.694	1.846	1.929
-14	.845	.906	.906	1.545	1.686	1.756	1.908	1.992
-15	.907	.969	.969	1.608	1.749	1.819	1.971	2.054
-16	.970	1.031	1.031	1.670	1.811	1.881	2.033	2.117
-17	1.032	1.094	1.094		1.874	1.994	2.096	2.179
-18	1.095	1.156	1.156		1.936	2.006	2.158	2.242
-19	1.157	1.219	1.219		1.999	2.069	2.221	2.304
-20	1.220	1.281	1.281		2.061	2.131	2.283	2.367
-21	1.282	1.344	1.344		2.124	2.194	2.346	2.429
-22	1.345	1.406	1.406		2.186	2.256	2.408	2.492
-23	1.407	1.469	1.469		2.249	2.319	2.471	2.554
-24	1.470	1.531	1.531		2.311	2.381	2.533	2.617
-25	1.532	1.594	1.594		2.374	2.444	2.596	2.679
-26	1.595	1.656	1.656		2.436	2.506	2.658	2.742
-27	1.657	1.719	1.719		2.499	2.569	2.721	2.804
-28	1.720	1.781	1.781		2.561	2.631	2.783	2.867
-29	1.782	1.844	1.844		2.624	2.694	2.846	2.929
-30	1.845	1.906	1.906		2.686	2.756	2.908	2.992
-31	1.907	1.969	1.969		2.749	2.819	2.971	3.054
-32	1.970	2.031	2.031		2.811	2.881	3.033	3.117


GRIP TOLERANCE FOR -05 & -06 +.030 -.010

For -08 & -10 +.040 -.010

For -12 +.050 -.010

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

2. EXAMPLE OF PART NUMBER

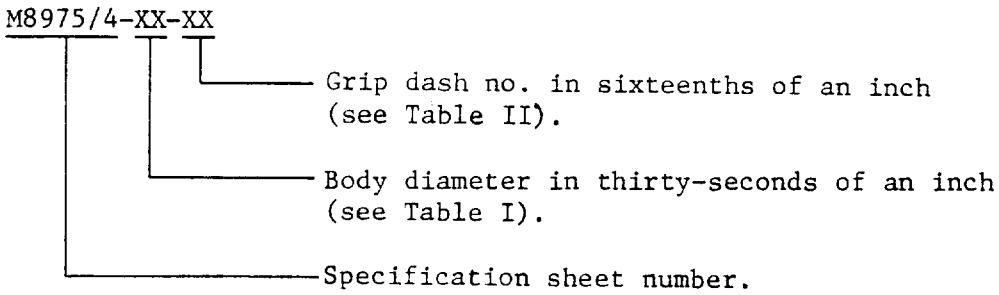

Custodians:
Army - AV
Air Force - 11

Preparing Activity:
Navy - AS
Project No. 5320-0421-4

Review Activities:
Air Force - 99
DLA - IS
Army - AR

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-F-8975/4A Fasteners, Blind, High Strength, Corrosion Resistant and Heat Resistant Steel, Protruding Head, Type II, Class 1

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO.

DATE

DD FORM 1 OCT 76 1426 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:49Z
Check the source to verify that this is the current version before use.