MILITARY SPECIFICATION SHEET

FASTENERS, BLIND, HIGH STRENGTH, TITANIUM/CRES,
FLUSH HEAD, TYPE I, CLASS 2

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the fasteners described herein shall consist of this specification and the latest issue of MIL-F-8975.

Design and usage limitations - These blind fasteners shall be used in accordance with the limitations of MIL-F-8975/1.

Tooling installation and removal - See MIL-F-8975 Appendix A.

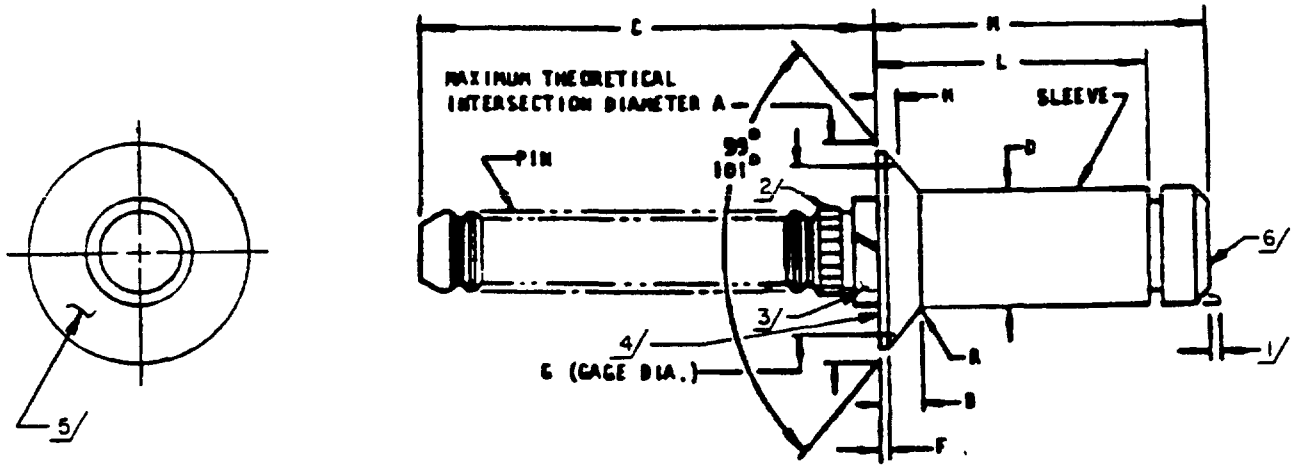


FIGURE 1. Blind fastener.

NOTES:
1/ Trim flash not to exceed .005 maximum length above head of pin.
2/ Knurled to facilitate fastener assembly, not part of installed fastener.
3/ Solid or split lock collar - manufacturer's option. Split not to exceed .020 width.
4/ Concentricity of conical surface of flush head to "D" diameter to be within .003 F.I.R.
5/ Head marking shall consist of the manufacturer's symbol, grip number and letters "NV" for commercially pure titanium sleeve material (arrangement optional).
6/ Identification: Smooth pin (no I.D.) indicates CRES pin.

AMSC N/A FSC 5320
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:50Z
Check the source to verify that this is the current version before use.

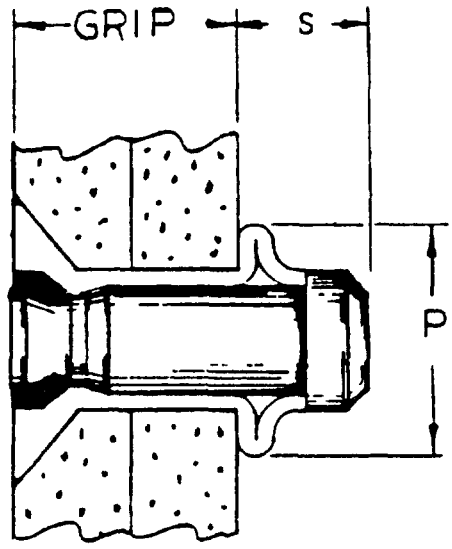


FIGURE 2. Typical installation.

1. REQUIREMENTS.

1.1 Material.

1.1.1 Pin and collar. Pin and collar material shall be A286 CRES in accordance with AMS 5737 (UNS S66286).

1.1.2 Sleeve. Sleeve material shall be titanium in accordance with ASTM B348 grade 1 (commercially pure titanium) (UNS R50250).

1.2 Heat treatment.

1.2.1 Pin. The pin shall be heat treated in accordance with MIL-F-8975.

1.3 Protective treatment. CRES components shall be passivated in accordance with QQ-P-35.

1.4 Lubricants. Lubricants may be applied to any or all components if required for performance. Lubricants shall be cetyl alcohol in accordance with MIL-L-87132 or dry film per MIL-L-8937.

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:50Z
Check the source to verify that this is the current version before use.

TABLE I. Sizes and dimensions.

Body Dia.	Nom. Dia.	A Head Dia. Max.	B Head Hgt. Max.	C Min.	D Sleeve Dia.	F Max.	G Gage Dia.	H Gage Hgt.	R Rad. Max.	S Design Ref. Only	P Dia. Min. 1/	Min. Ult. Single Shear lb.	Min. Ult. Tensile lb.
-05	.163	.333	.072	.844	.164 .162	.011	.2832 .2830	.0206 .0171	.010	.232 Max.	.235	1825	900
-06	.198	.386	.080	.875	.199 .197	.013	.3272 .3270	.0243 .0205	.015	.292 Max.	.275	2690	1400
-08	.259	.507	.105	1.000	.260 .258	.017	.4320 .4318	.0310 .0270	.020	.361 Max.	.350	4650	2000
-10	.311	.634	.137	1.218	.312 .310	.020	.5451 .5449	.0367 .0325	.025	.408 Max.	.410	6675	3600

1/ P diameter shall not exceed the maximum limit of the head diameter (dimension A).

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:50Z
Check the source to verify that this is the current version before use.


TABLE II. Fastener diameters and grip lengths.

GRIP NUMBER TABULATIONS

Grip No.	Grip Range		05		06		08		10		Grip No.
	Min.	Max.	L Ref.	M Max.	L Ref.	M Max.	L Ref.	M Max.	L Ref.	M Max.	
02	.094	.157	.335	.477	.362	.522					02
03	.156	.220	.398	.539	.429	.584	.465	.645			03
04	.219	.282	.460	.602	.487	.647	.528	.708			04
05	.281	.345	.523	.664	.549	.709	.590	.770	.638	.841	05
06	.344	.407	.585	.727	.612	.772	.653	.833	.701	.904	06
07	.406	.470	.648	.789	.674	.834	.715	.895	.763	.966	07
08	.469	.532	.710	.852	.737	.897	.778	.958	.826	1.029	08
09	.531	.595	.773	.914	.799	.959	.840	1.020	.888	1.091	09
10	.594	.657	.835	.977	.862	1.022	.903	1.083	.951	1.155	10
11	.656	.720	.898	1.039	.924	1.084	.965	1.145	1.013	1.219	11
12	.719	.782	.960	1.102	.987	1.147	1.028	1.208	1.076	1.279	12
13	.781	.845	1.023	1.164	1.049	1.209	1.090	1.270	1.138	1.341	13
14	.844	.907	1.085	1.227	1.112	1.272	1.153	1.333	1.201	1.404	14
15	.906	.970	1.148	1.289	1.174	1.334	1.215	1.395	1.263	1.466	15
16	.969	1.032	1.210	1.352	1.237	1.397	1.278	1.458	1.326	1.529	16

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:50Z
Check the source to verify that this is the current version before use.

EXAMPLE OF PART NUMBER

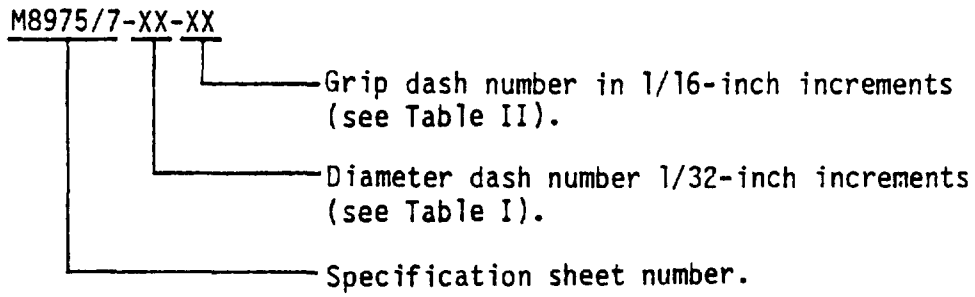

Custodians:
Army - AV
Air Force - 99

Review Activities:
Army - AR, MI
Navy - SH, OS
Air Force - 82
DLA - IS

Preparing Activity:
Navy - AS
(Project No. 5320-0612)

Source: https://assist.dla.mil -- Downloaded: 2026-10-17T11:50Z
Check the source to verify that this is the current version before use.